



MIT CSAIL






6.869: Advances in Computer Vision








MIT
COMPUTER
VISION

Lecture 8

Textures

What is a texture?



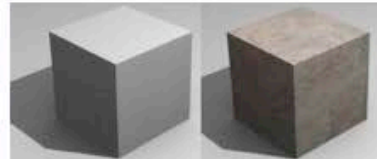




Which textures are we going to talk about in this lecture?



Stationary
Stochastic




When are two textures similar?

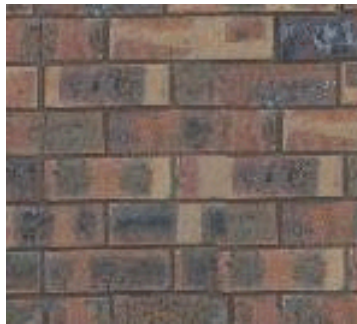


All these images are different instances of the same texture
We can differentiate between them, but they seem generated
by the same process

Texture Analysis

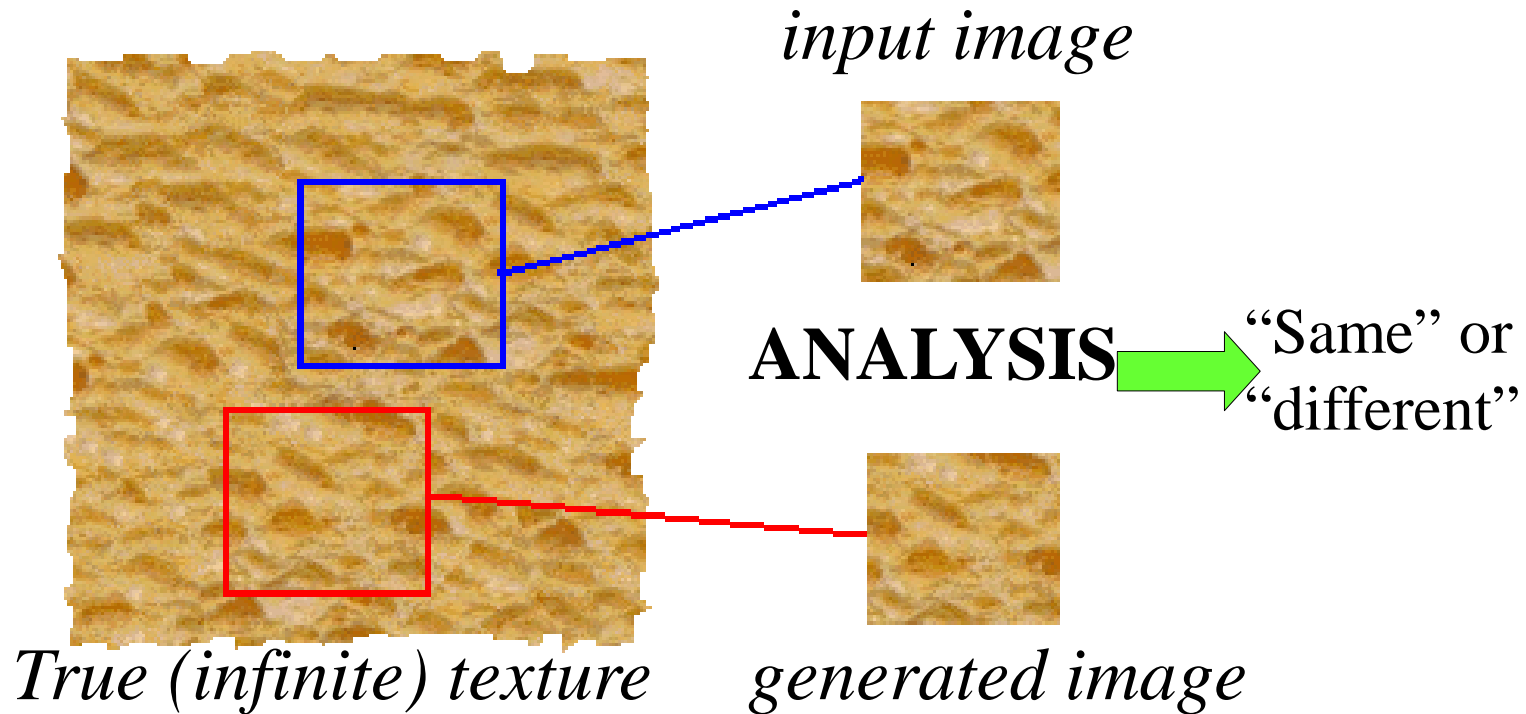

Compare textures and decide if they're made of the same "stuff".

Texture Synthesis

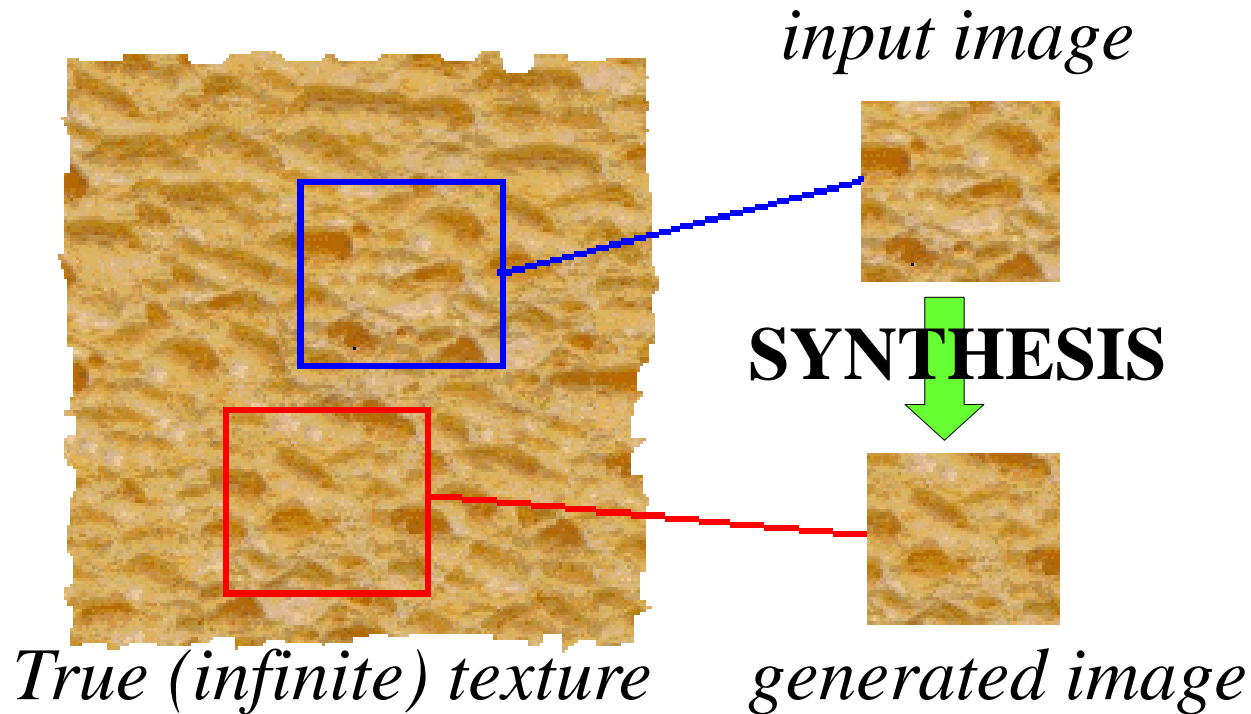

Given a finite sample of some texture, the goal is to synthesize other samples from that same texture

- The sample needs to be "large enough"

Let's get a feeling of the
mechanisms for
texture perception

What is special about texture perception?

- Pre-attentive texture discrimination
- Perception of sets and summary statistics
- Crowding

REVIEW ARTICLES

Textons, the elements of texture perception, and their interactions

Bela Julesz

Bell Laboratories, Murray Hill, New Jersey 07974, USA

Research with texture pairs having identical second-order statistics has revealed that the pre-attentive texture discrimination system cannot globally process third- and higher-order statistics, and that discrimination is the result of a few local conspicuous features, called textons. It seems that only the first-order statistics of these textons have perceptual significance, and the relative phase between textons cannot be perceived without detailed scrutiny by focal attention.




Bela Julesz, "Textons, the Elements of Texture Perception, and their Interactions". Nature 290: 91-97. March, 1981.

Pre-attentive texture discrimination





Bela Julesz, "Textons, the Elements of Texture Perception, and their Interactions". Nature 290: 91-97. March, 1981.

Pre-attentive texture discrimination

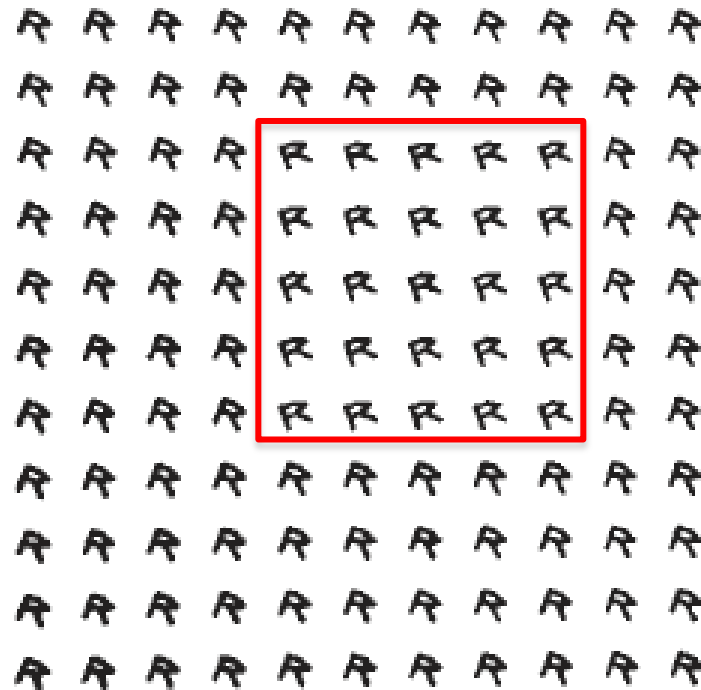

Bela Julesz, "Textons, the Elements of Texture Perception, and their Interactions". Nature 290: 91-97. March, 1981.

Pre-attentive texture discrimination

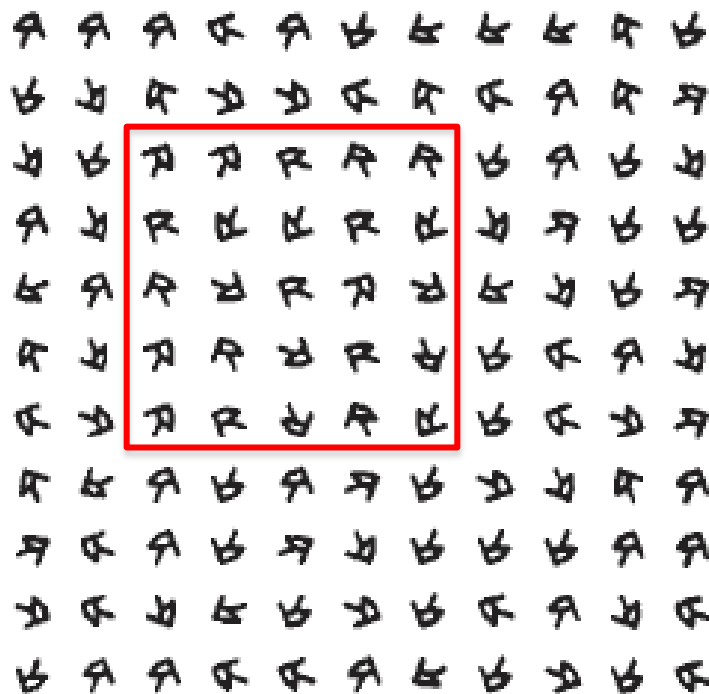


This texture pair is pre-attentively indistinguishable. Why?

The uncrowded window of object recognition

Denis G Pelli & Katharine A Tillman

Crowding

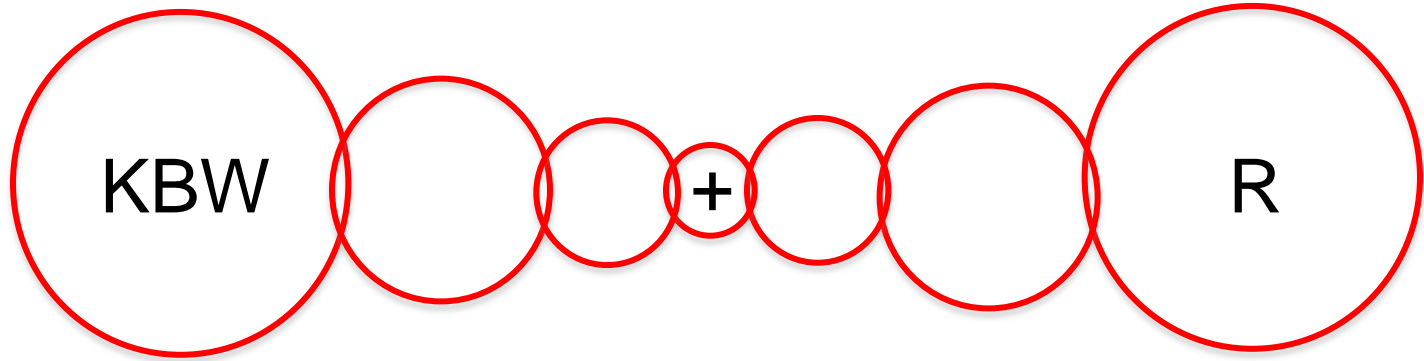


A summary-statistic representation in peripheral vision explains visual crowding

Benjamin Balas ¹,
Lisa Nakano ² and
Ruth Rosenholtz ³



Journal of Vision
November 19, 2009 vol. 9 no. 12

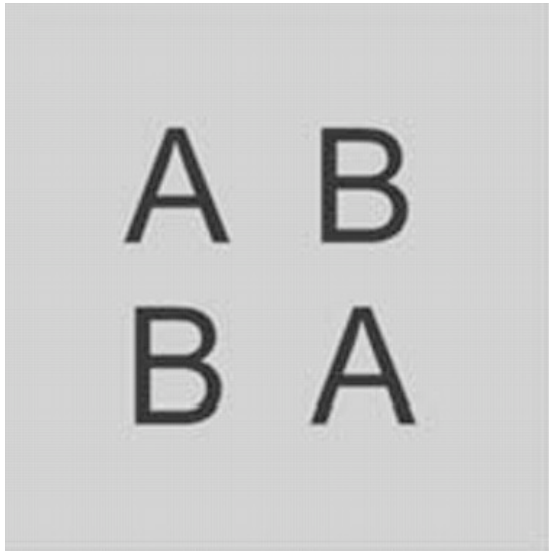

+



Where's waldo?



Research Article

SEEING SETS: Representation by Statistical Properties

Dan Ariely


Massachusetts Institute of Technology




Representation of sets





Set

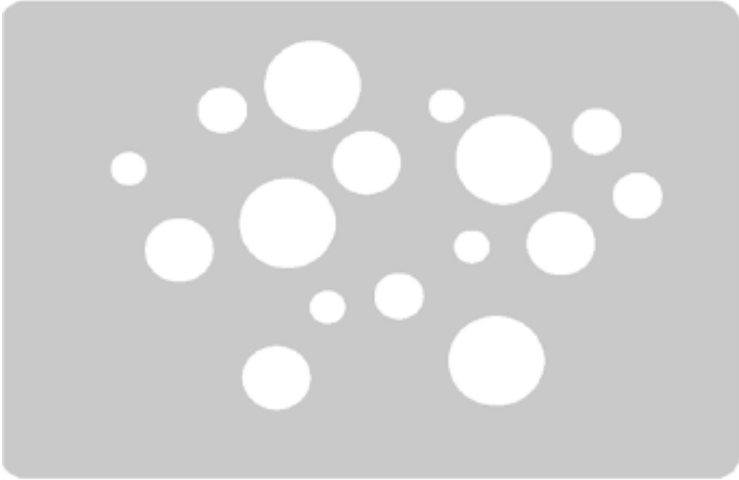



Is this element a member of the set?

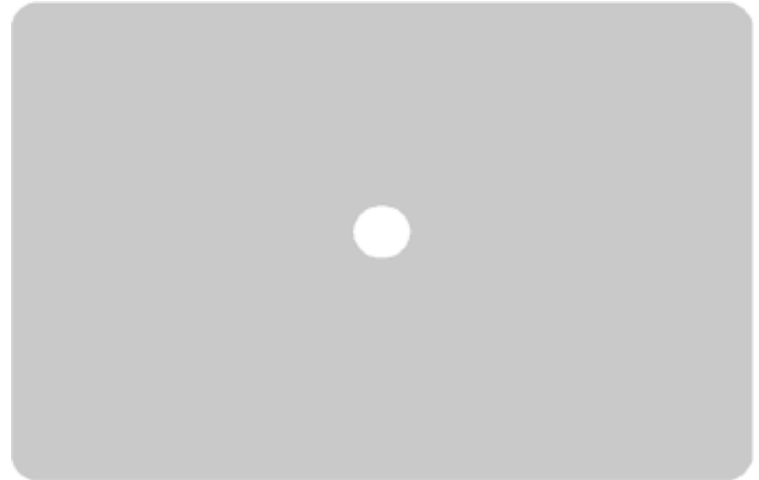

Ebbinghaus illusion

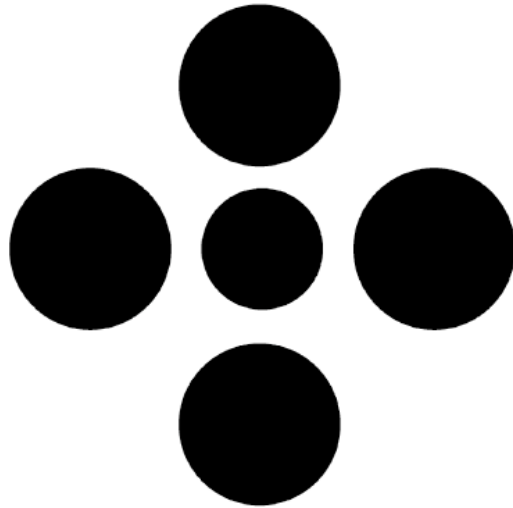

The central circle is judged relative to the set properties of the circles surrounding it

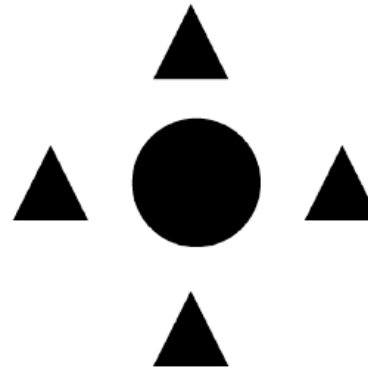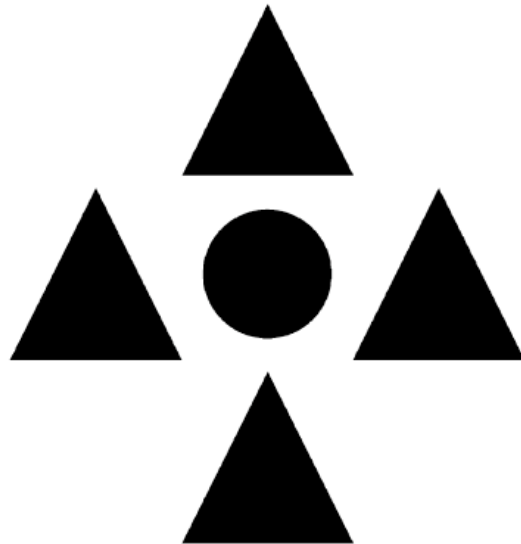


Attenuated by reducing the set grouping.

Representation

What a model should account for:


1. **Biological plausibility:** The stages of the model should be motivated by, and be consistent with, known physiological mechanisms of early vision.
2. **Generality:** The model should be general enough that it can be tested on any arbitrary gray-scale image.
3. **Quantitative match with psychophysical data:** The model should make a quantitative **prediction about the salience of the boundary** between any two textured regions. Rank ordering of the discriminability of different texture pairs should agree with that measured psychophysically.

Julesz - Textons

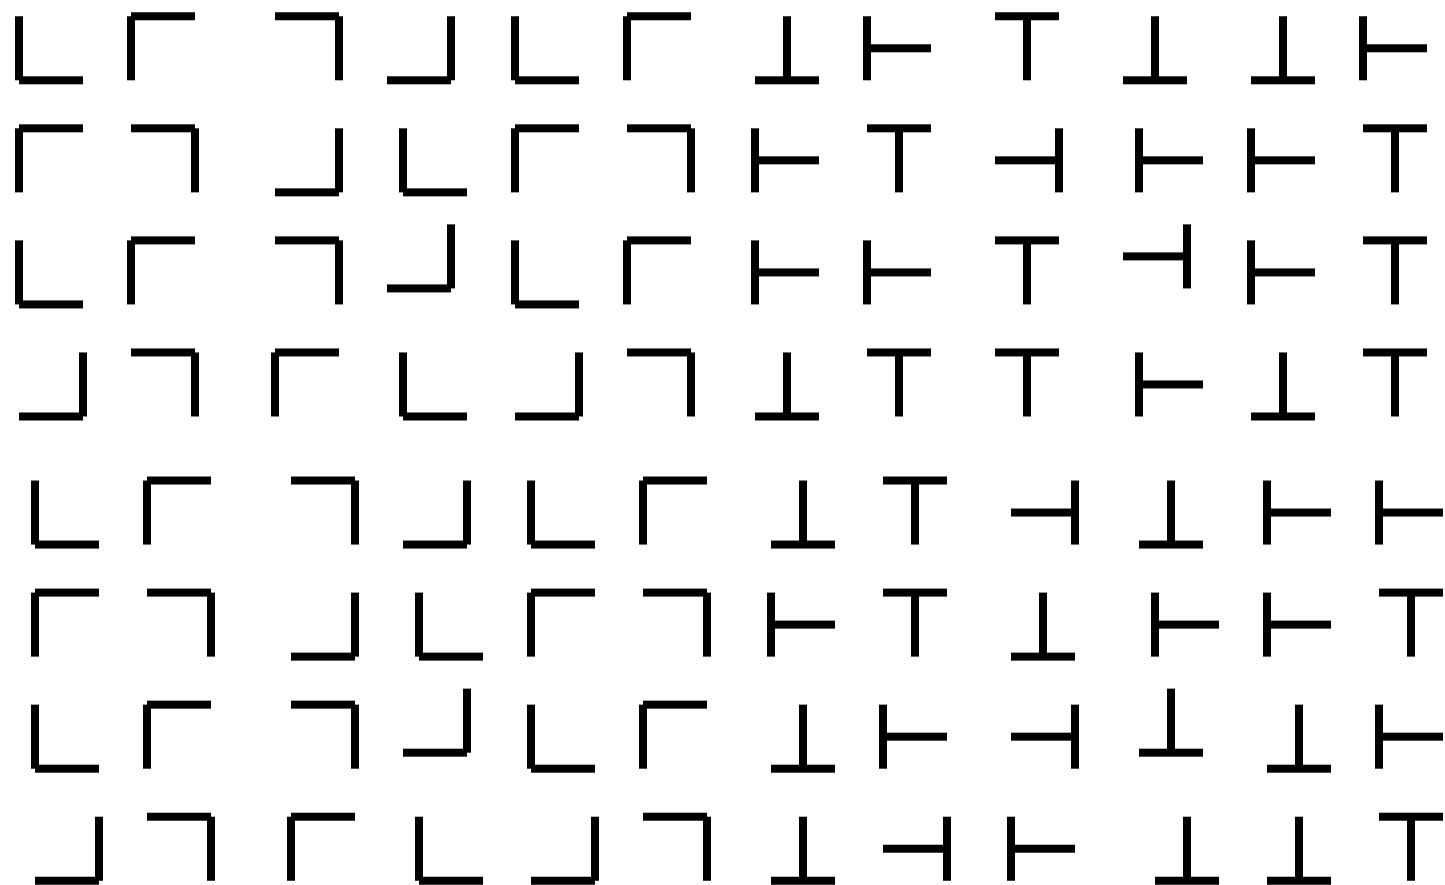


Julesz - Textons

Textons: fundamental texture elements.

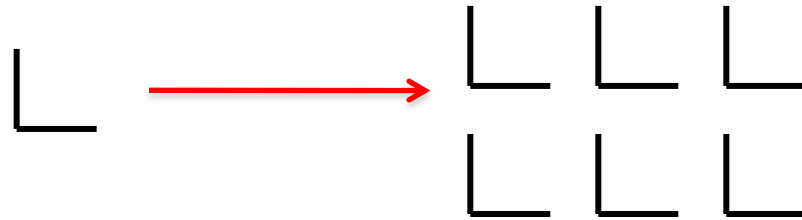

Textons might be represented by features such as terminators, corners, and intersections within the patterns...

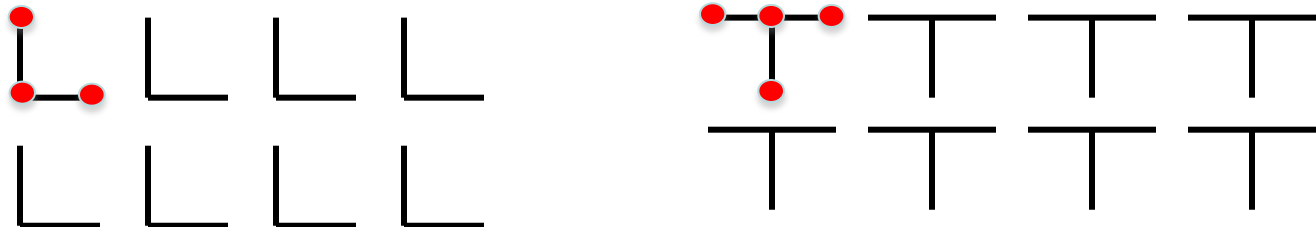


Nature, Vol. 333. No. 6171. pp. 363-364, 26 May 1988

Early vision and texture perception

James R. Bergen* & **Edward H. Adelson****

* SRI David Sarnoff Research Center, Princeton,
New Jersey 08540, USA

** Media Lab and Department of Brain and Cognitive Science,

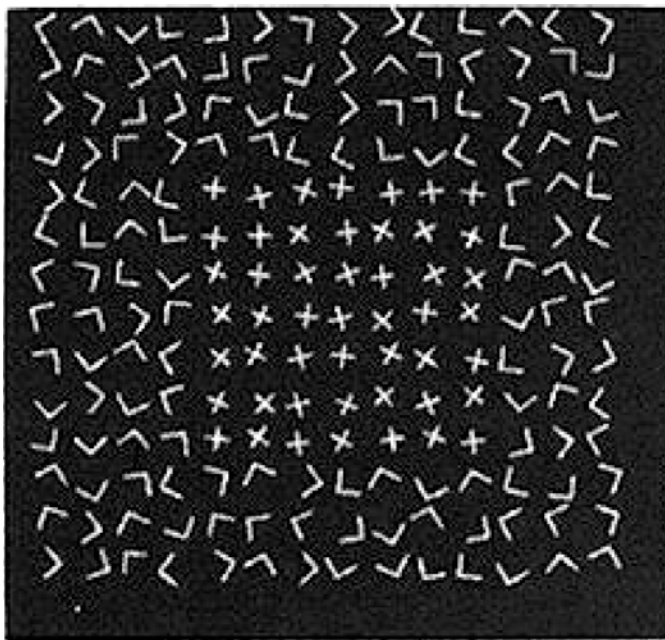

Observation: the Xs
look smaller than the Ls.

“We note here that simpler, lower-level mechanisms tuned for size may be sufficient to explain this discrimination.”







Early vision and texture perception

James R. Bergen* & Edward H. Adelson**

Ls 25% larger

contrast adjusted to keep mean constant

Ls 25% shorter

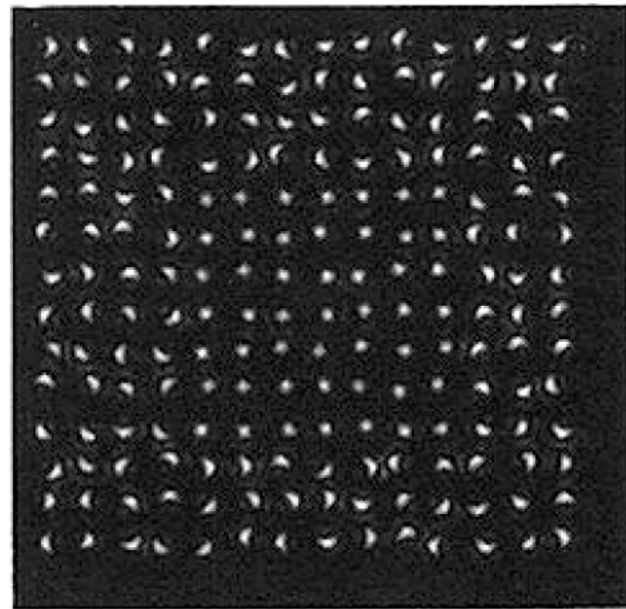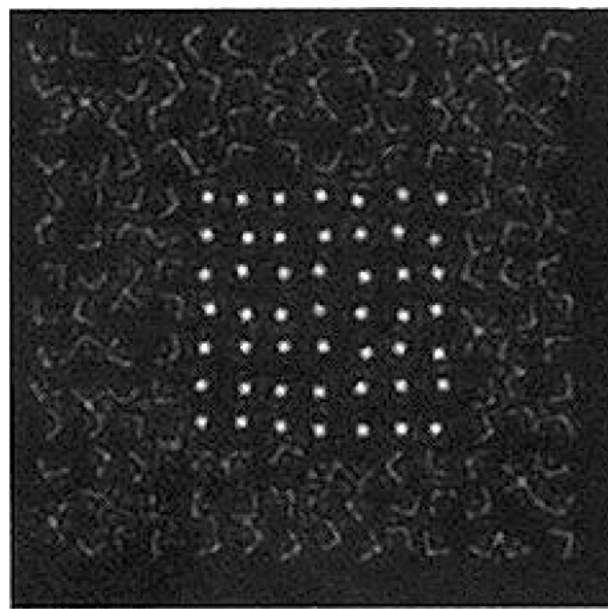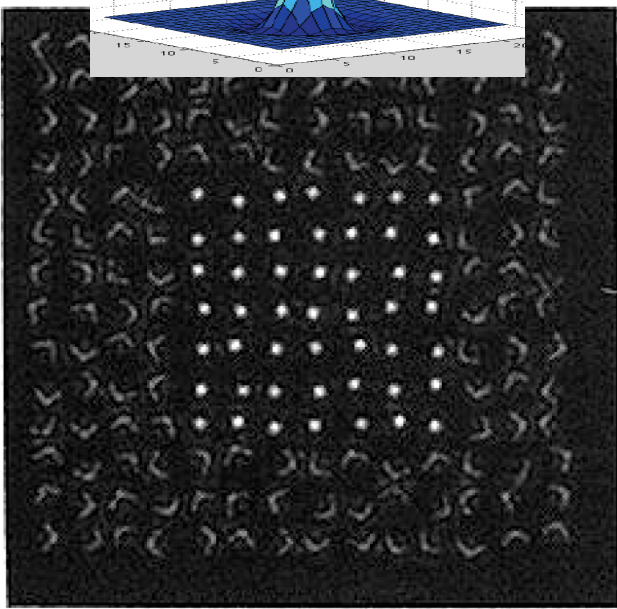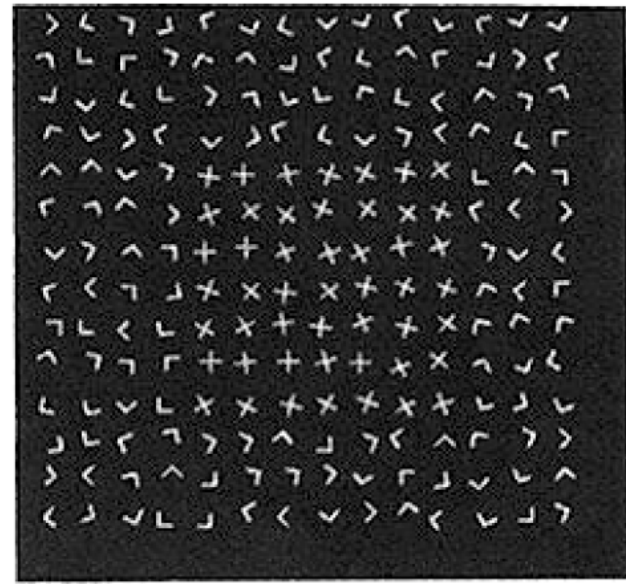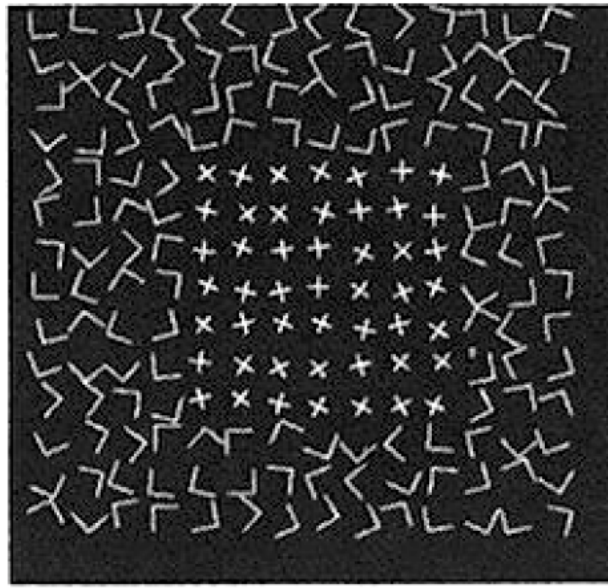


Preattentive texture discrimination with early vision mechanisms

Jitendra Malik and Pietro Perona

*Department of Electrical Engineering and Computer Sciences, University of California, Berkeley,
Berkeley, California 94720*


Received July 7, 1989; accepted December 28, 1989

We present a model of human preattentive texture perception. This model consists of three stages: (1) convolution of the image with a bank of even-symmetric linear filters followed by half-wave rectification to give a set of responses modeling outputs of V1 simple cells, (2) inhibition, localized in space, within and among the neural-response profiles that results in the suppression of weak responses when there are strong responses at the same or nearby locations, and (3) texture-boundary detection by using wide odd-symmetric mechanisms. Our model can predict the salience of texture boundaries in any arbitrary gray-scale image. A computer implementation of this model has been tested on many of the classic stimuli from psychophysical literature. Quantitative predictions of the degree of discriminability of different texture pairs match well with experimental measurements of discriminability in human observers.




vertical filter


Squared responses

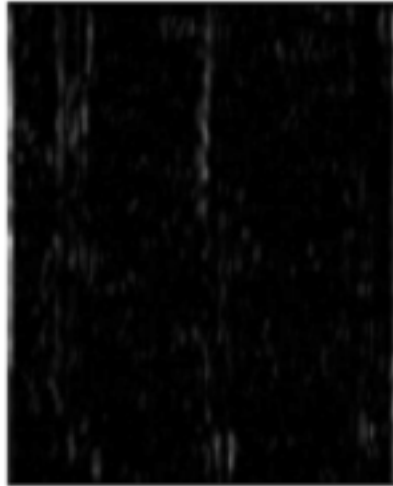



Spatially blurred

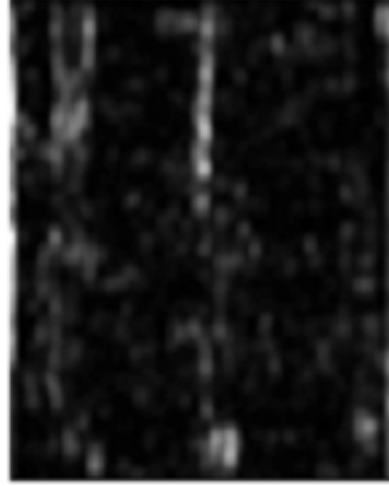

image



horizontal filter

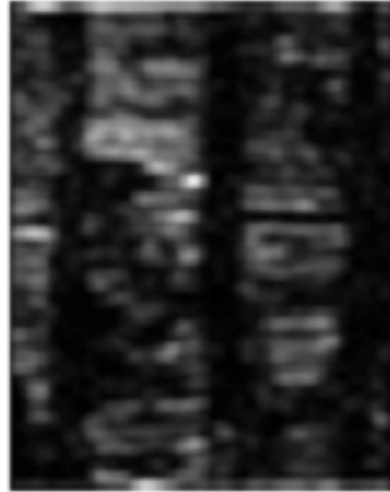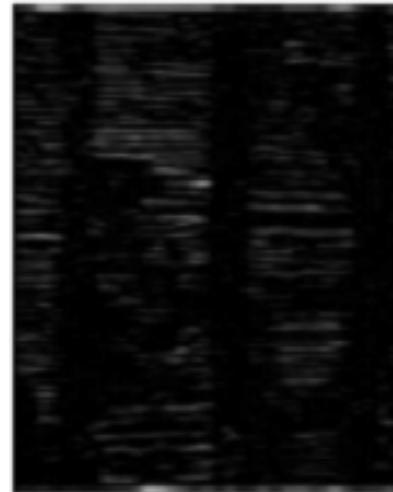

Threshold squared, blurred responses, then categorize texture based on those two bits



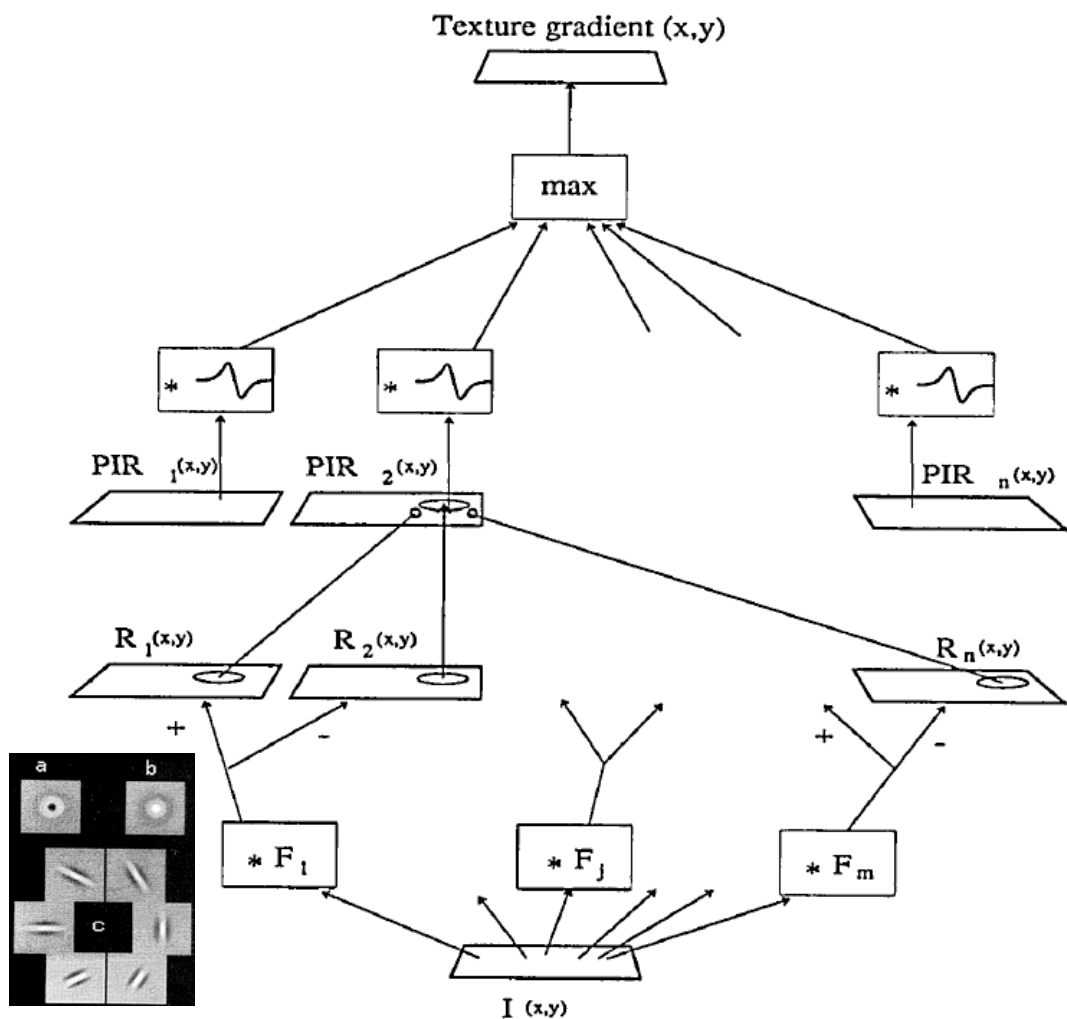



Fig. 1. Simplified schematics of our model for texture perception. The image (bottom) is filtered using the kernels $F_1 \dots F_m$ and is half-wave rectified to give the set of simple-cell responses $R_1 \dots R_n$. The postinhibition responses $PIR_1 \dots PIR_n$ are computed by thresholding the R_i and taking the maximum of the result over small neighborhoods. The thresholds depend on the activity of all channels. The texture gradient is computed by taking the maximum of the responses of wide odd-symmetric filters acting on the postinhibition responses PIR_i .

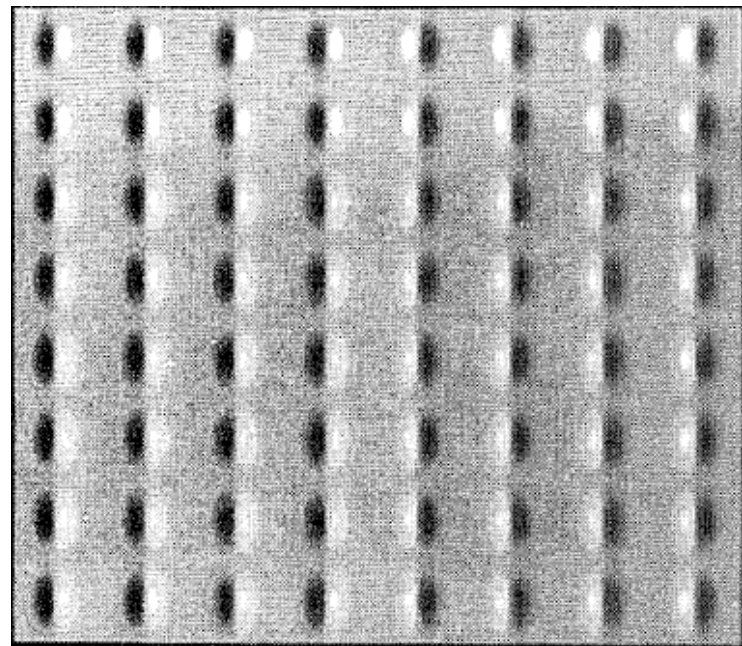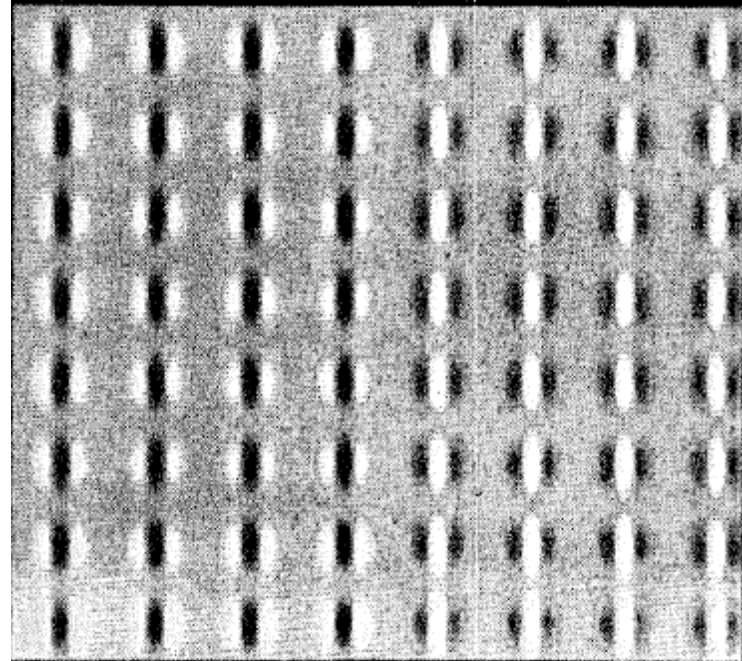


Two big families of models

- 1- Parametric models of filter outputs
- 2- Example-based non-parametric models

The trivial texture synthesis algorithm

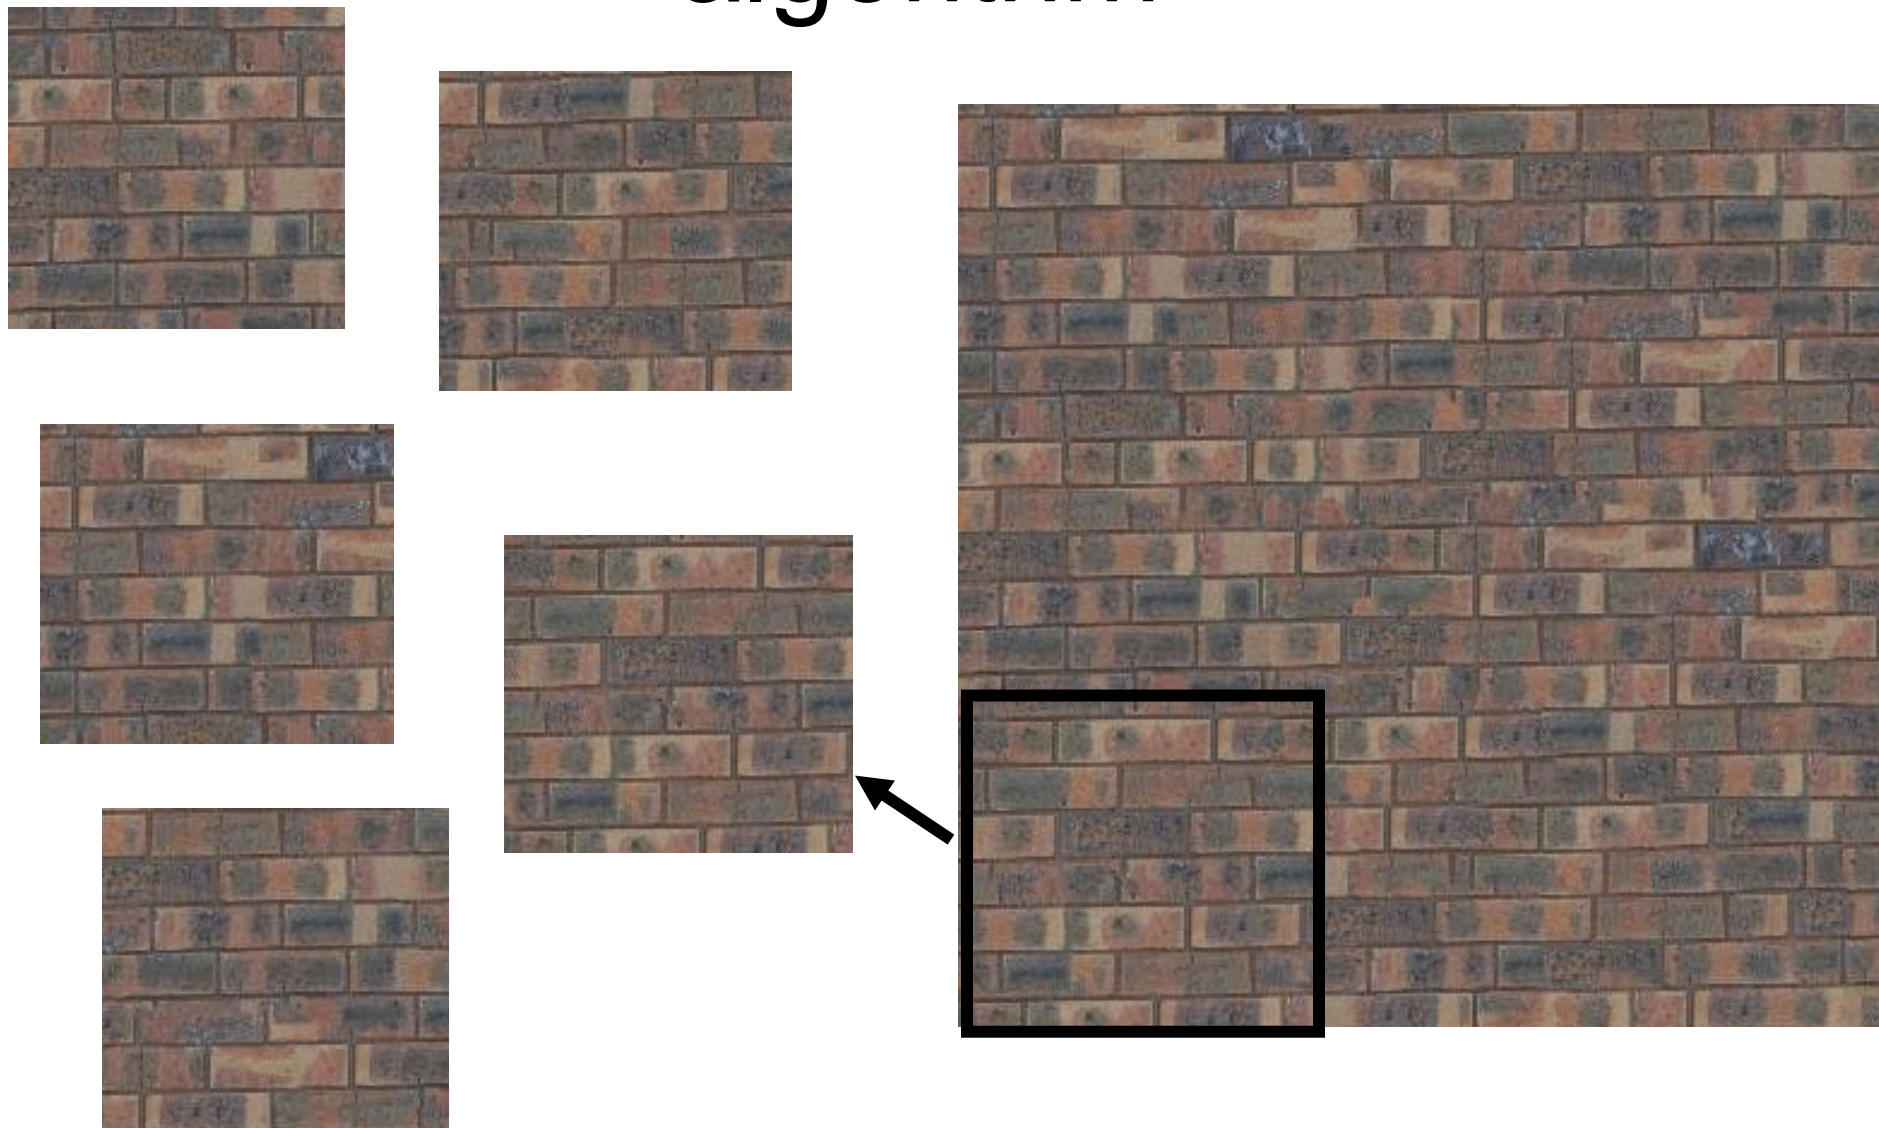


Texture synthesis and representation

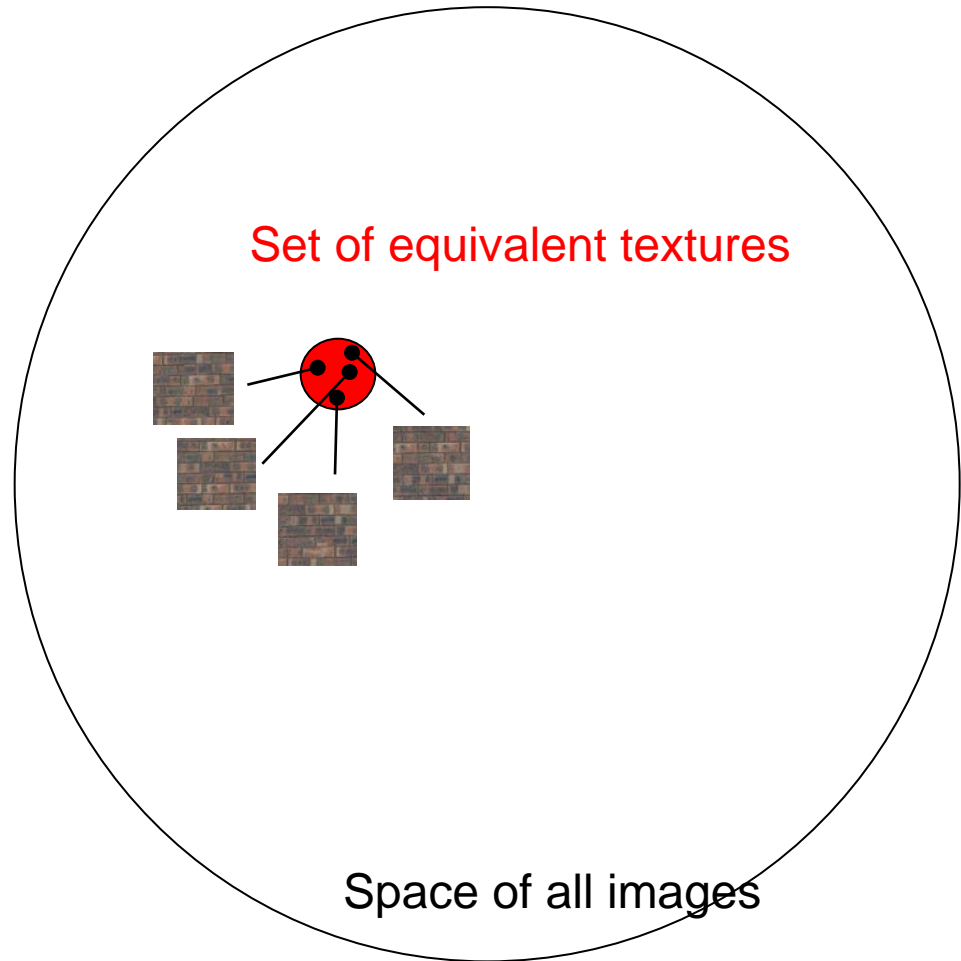

Set of equivalent textures: generated by exactly the same physical process

Texture synthesis and representation

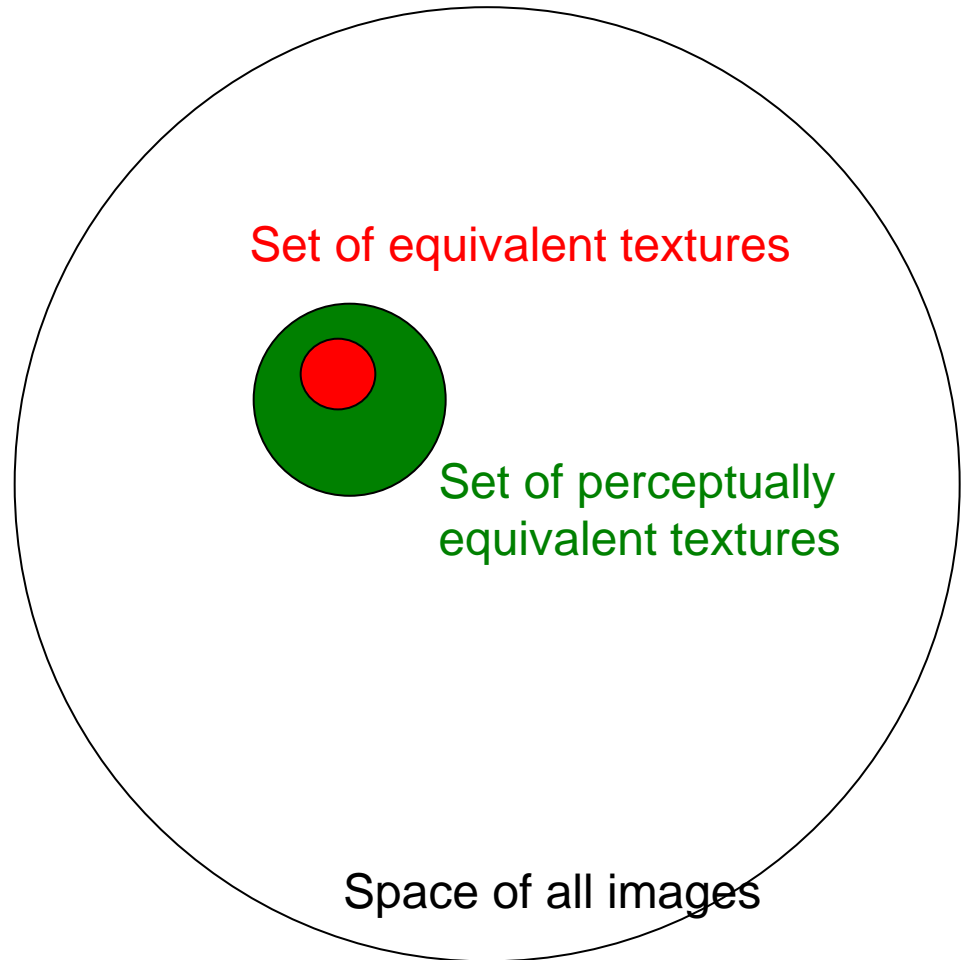

Set of equivalent textures: generated by exactly the same physical process

Set of perceptually equivalent textures: “well, they just look the same to me”

If matching the averaged squared filter values is a good way to match a given texture, then maybe matching the entire marginal distribution (eg, the histogram) of a filter's response would be even better.




Jim Bergen proposed this...

Pyramid-Based Texture Analysis/Synthesis


David J. Heeger^{*}
Stanford University

James R. Bergen[†]
SRI David Sarnoff Research Center

SIGGRAPH 1994

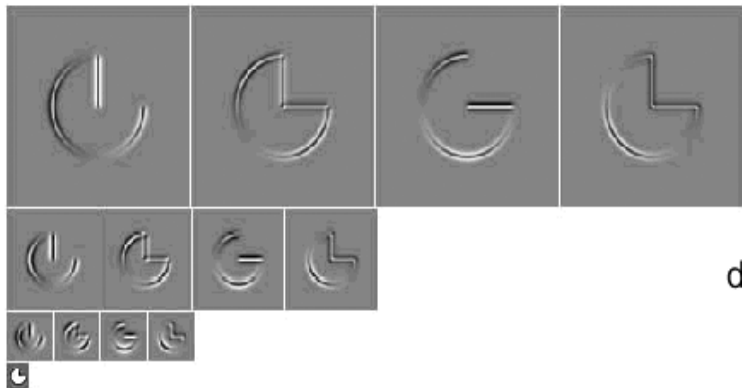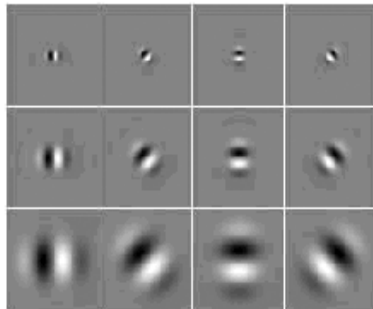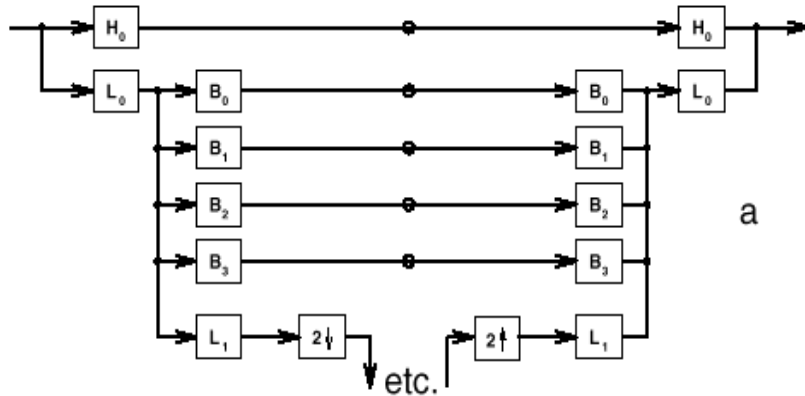

The main idea: it works by ‘kind of’ projecting a random image into the set of equivalent textures

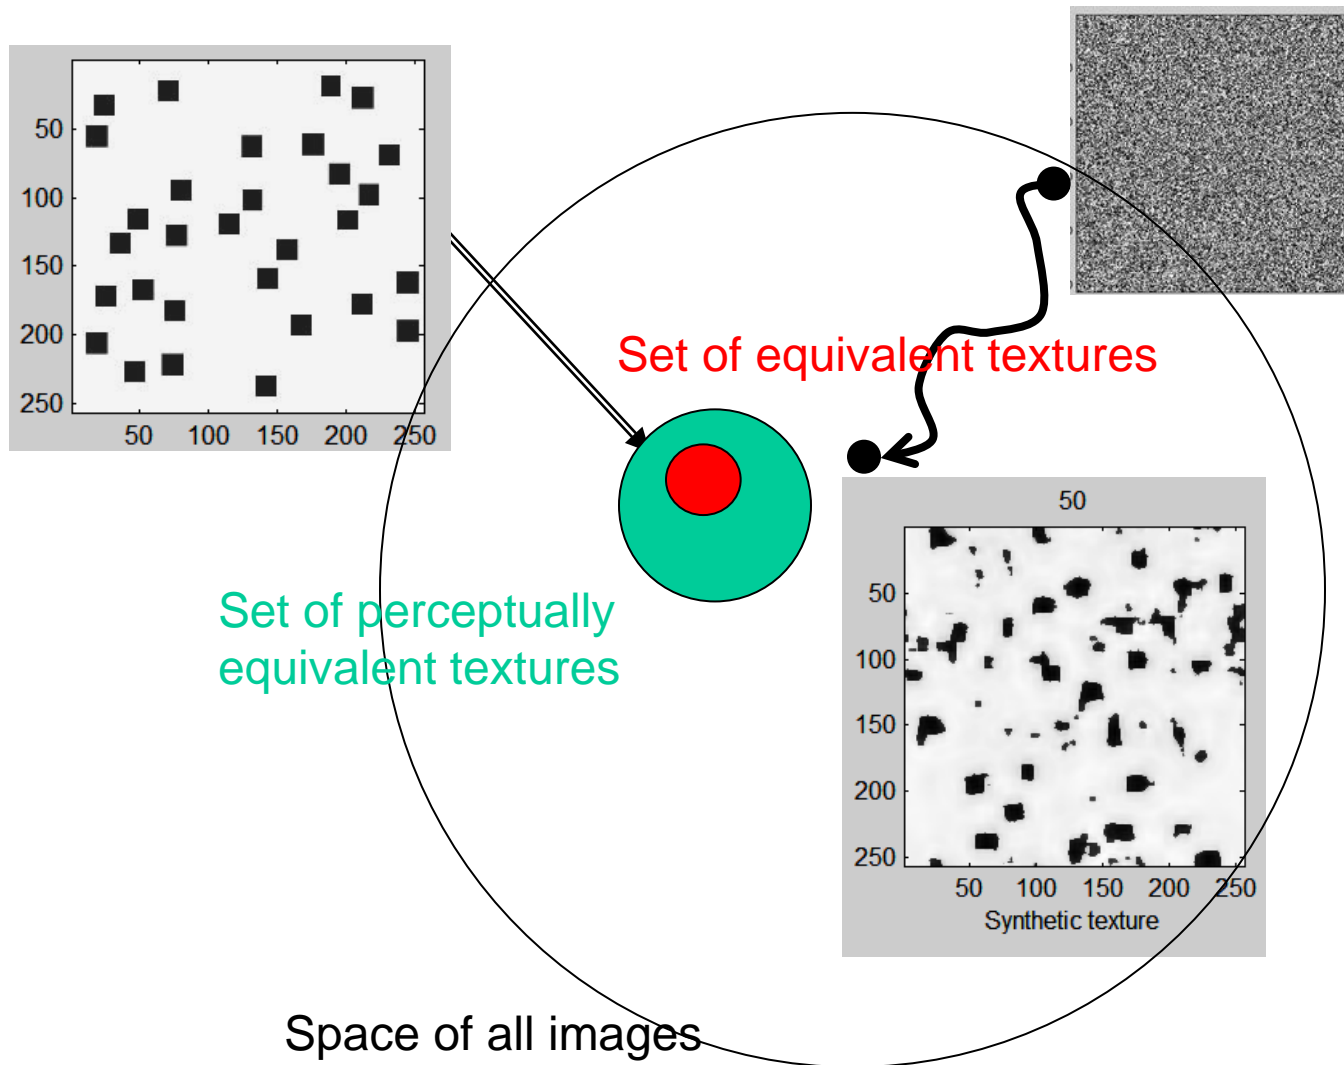

Overview of the algorithm


```
Match-texture(noise, texture)
  Match-Histogram (noise, texture)
  analysis-pyr = Make-Pyramid (texture)
  Loop for several iterations do
    synthesis-pyr = Make-Pyramid (noise)
    Loop for a-band in subbands of analysis-pyr
      for s-band in subbands of synthesis-pyr
        do
          Match-Histogram (s-band, a-band)
    noise = Collapse-Pyramid (synthesis-pyr)
  Match-Histogram (noise, texture)
```

Two main tools:


1- steerable pyramid

2- matching histograms


1-The steerable pyramid

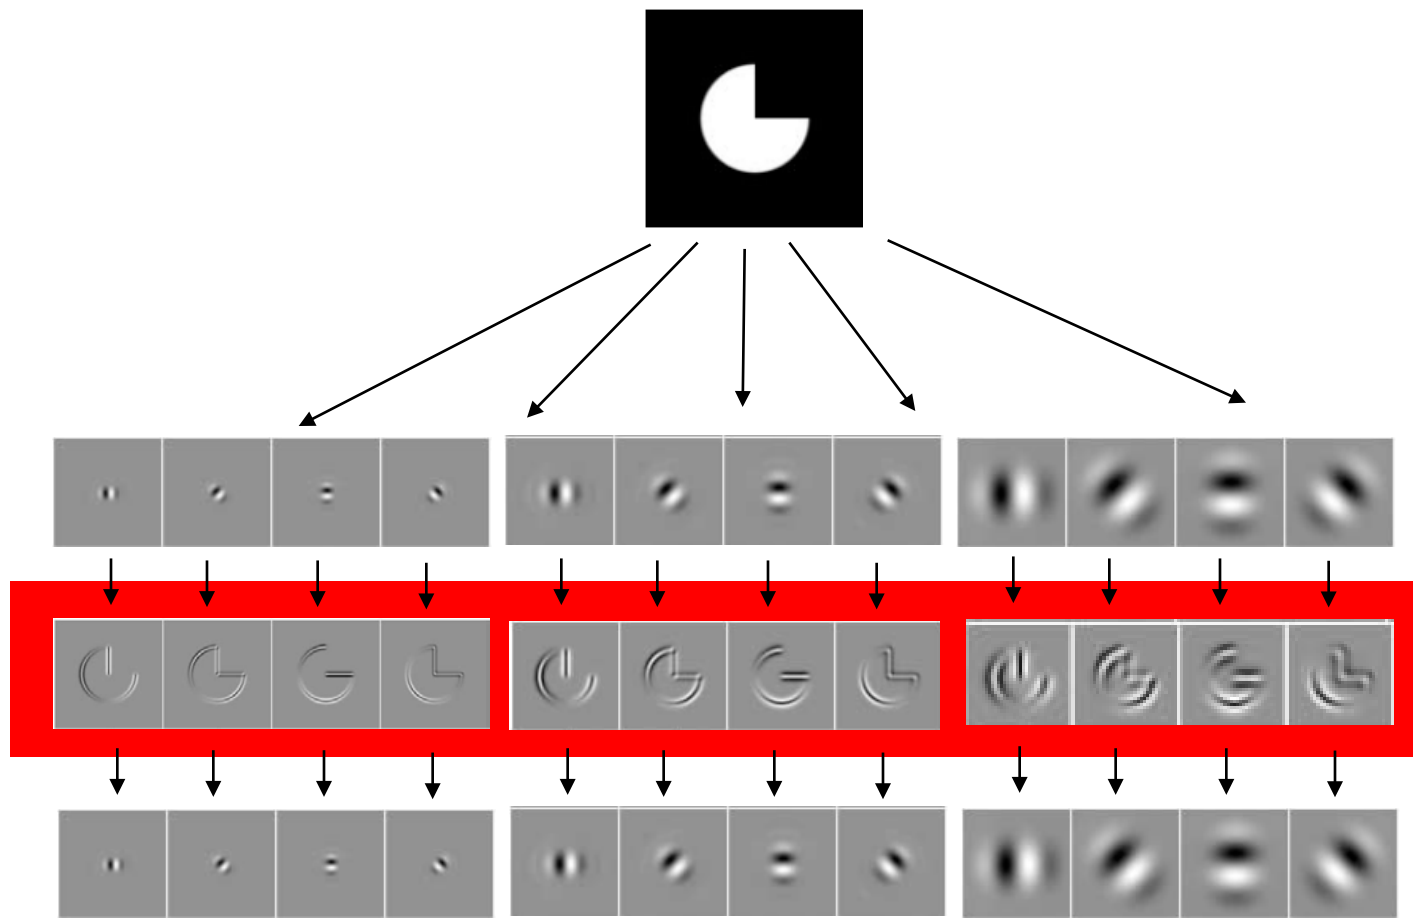

Low-pass residual




1-The steerable pyramid

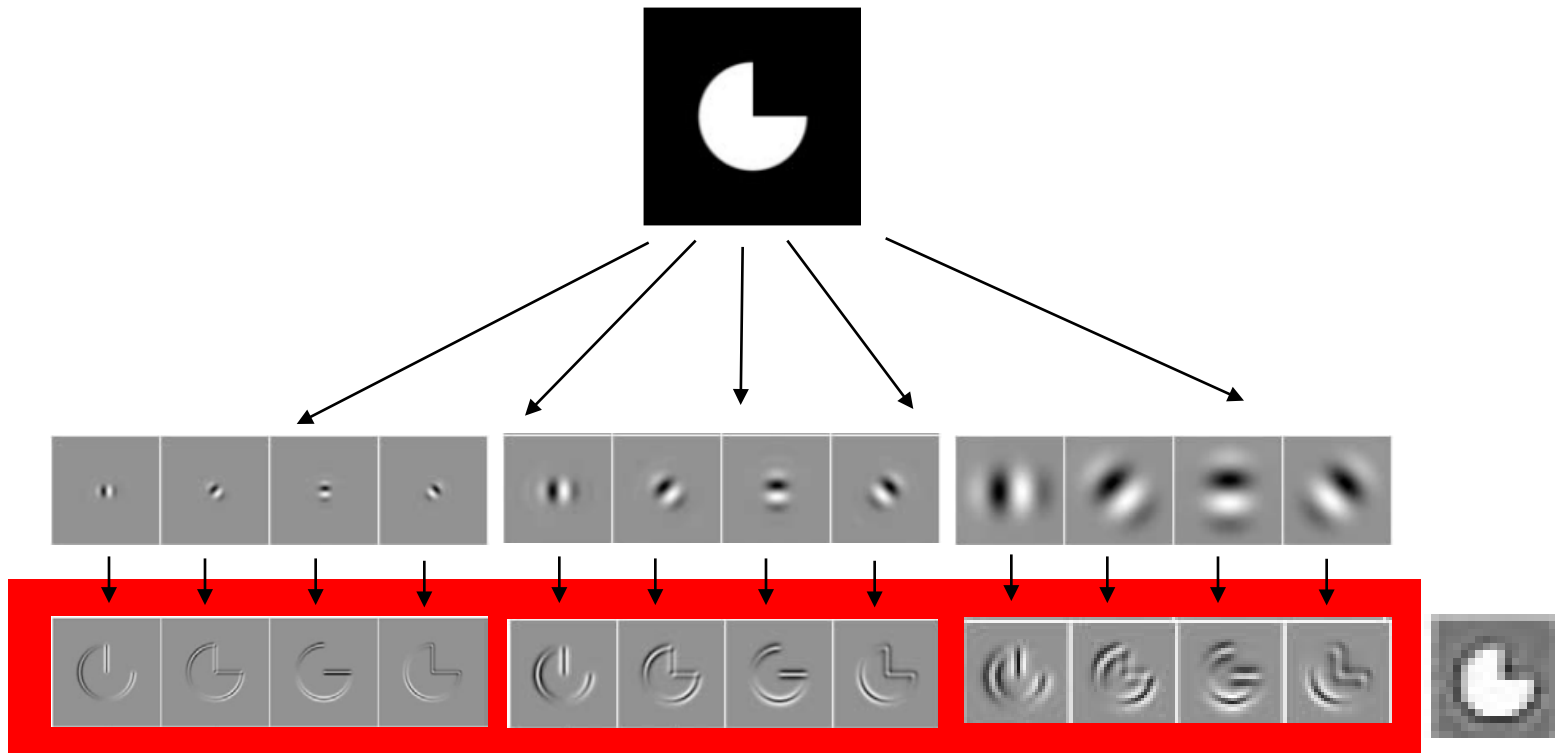

But why do I want to represent images like this?

1-The steerable pyramid

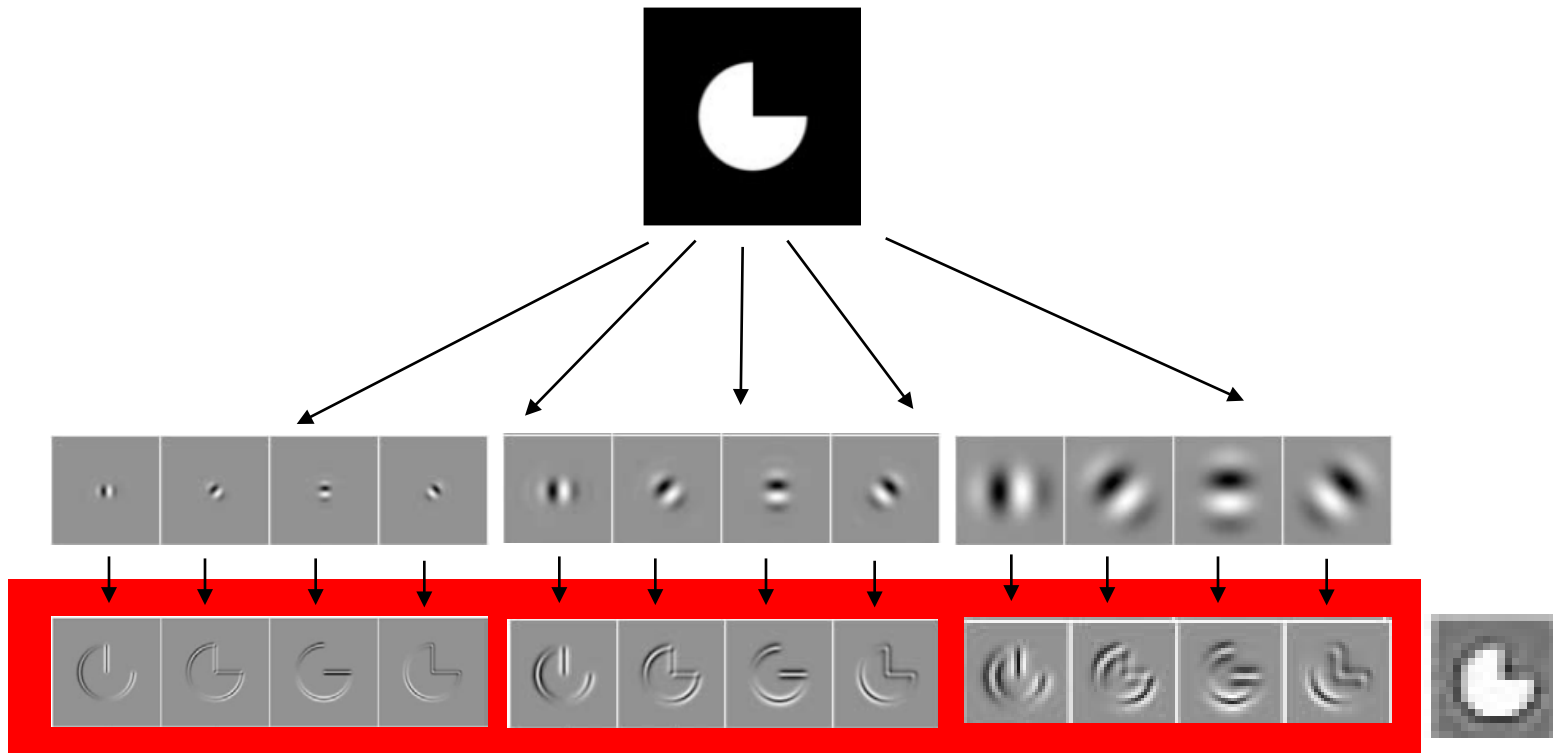

Argument used by H & B: Statistical measures in the subband representation seem to provide a “distance” between textures that correlates with human perception better than pixel-based representations.

1-The steerable pyramid




In general seems a good idea to have a representation that:

- Preserves all image information (we can go back to the image)
- Provides more independent channels of information than pixel values (we can mess with each band independently)


But all this is just indirectly related to the texture synthesis task. But let assume is good enough...

1-The steerable pyramid

Input texture

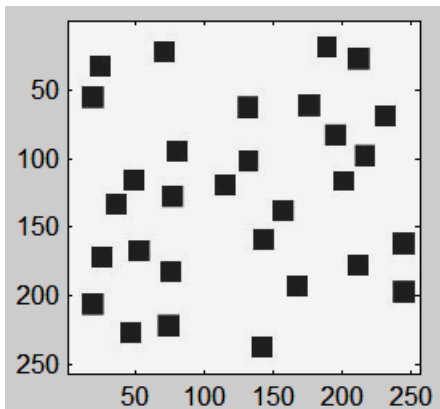

Steerable pyr

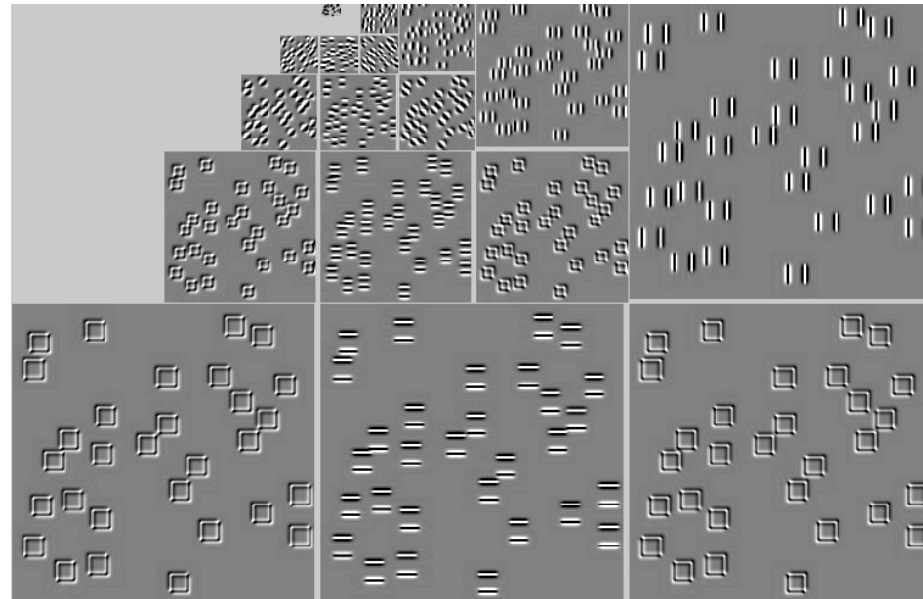

Overview of the algorithm



```
Match-texture(noise, texture)
  Match-Histogram (noise, texture)
  analysis-pyr = Make-Pyramid (texture)
  Loop for several iterations do
    synthesis-pyr = Make-Pyramid (noise)
    Loop for a-band in subbands of analysis-pyr
      for s-band in subbands of synthesis-pyr
        do
          Match-Histogram (s-band, a-band)
    noise = Collapse-Pyramid (synthesis-pyr)
  Match-Histogram (noise, texture)
```

Two main tools:


1- steerable pyramid

2- matching histograms



2-Matching histograms

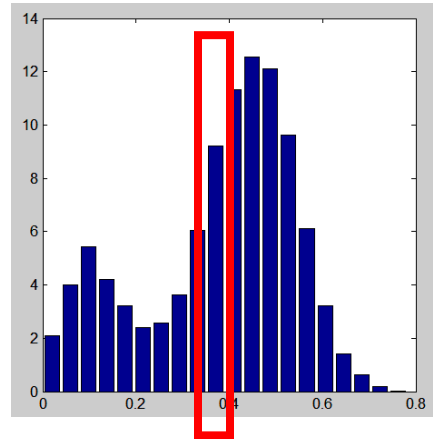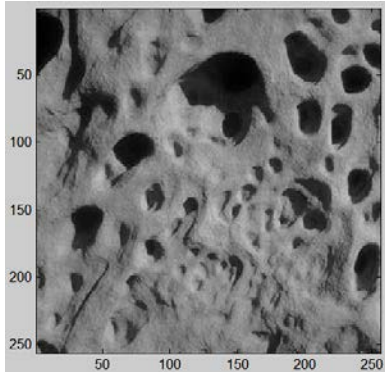


9% of pixels have an intensity value within the range[0.37, 0.41]

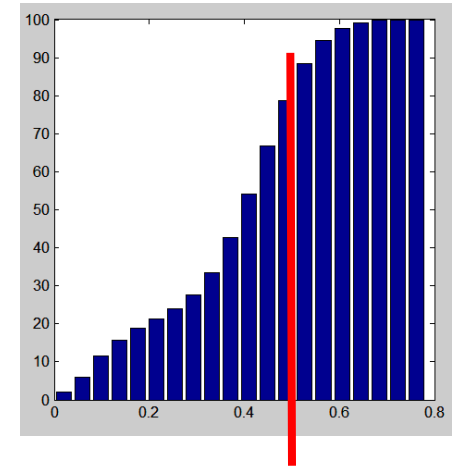

75% of pixels have an intensity value smaller than 0.5

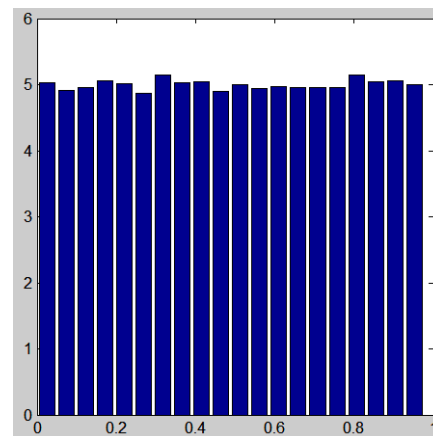
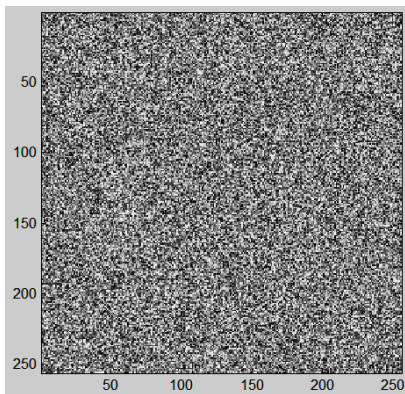


5% of pixels have an intensity value within the range[0.37, 0.41]

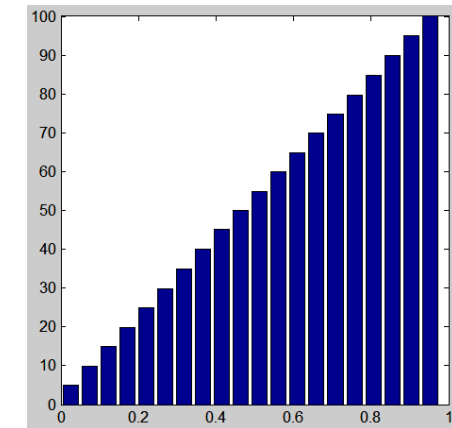

2-Matching histograms

$Z(x,y)$

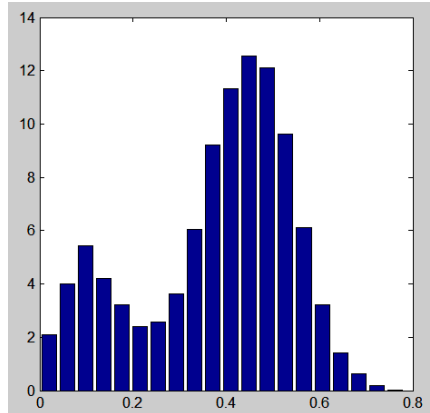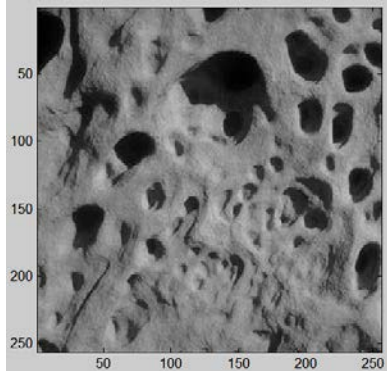


We look for a transformation of the image Y



$$Y' = f(Y)$$

Such that

$$\text{Hist}(Y) = \text{Hist}(f(Z))$$



$Y(x,y)$

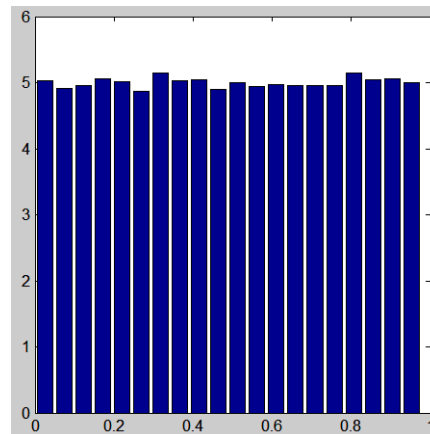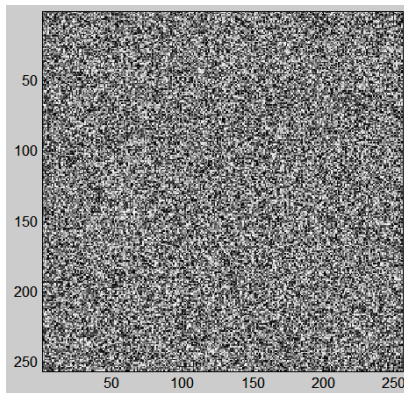

Problem: there are infinitely many functions that can do this transformation.



A natural choice is to use f being:

- pointwise non linearity
- stationary
- monotonic (most of the time invertible)


2-Matching histograms

The function f is just a look up table: it says, change all the pixels of value Y into a value $f(Y)$.

$$Y' = f(Y)$$

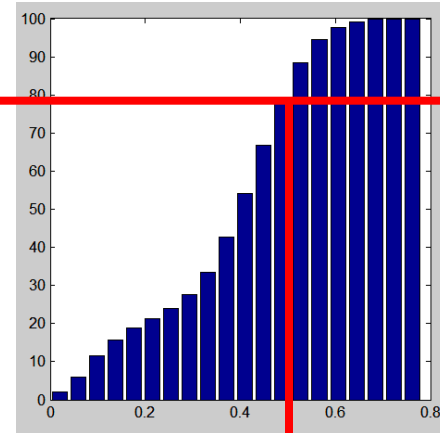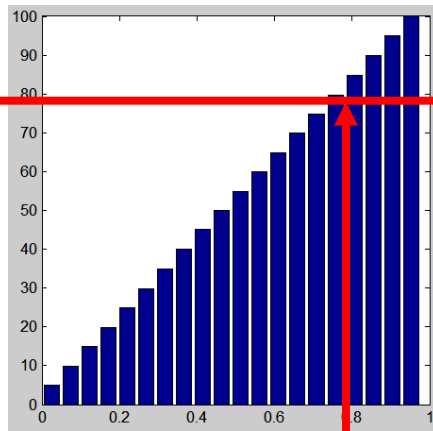


$Y(x,y)$



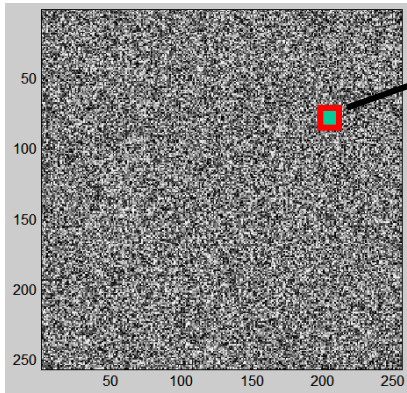


$Y = 0.8$
Original
intensity



$Y' = 0.5$
New
intensity

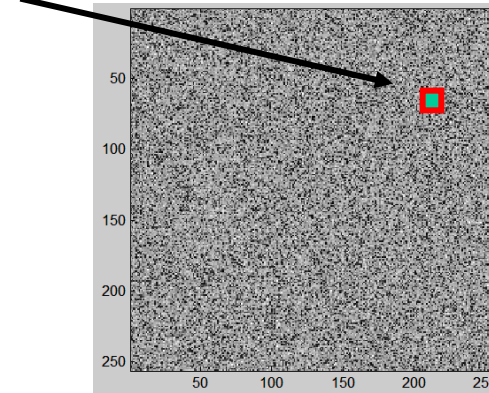






2-Matching histograms

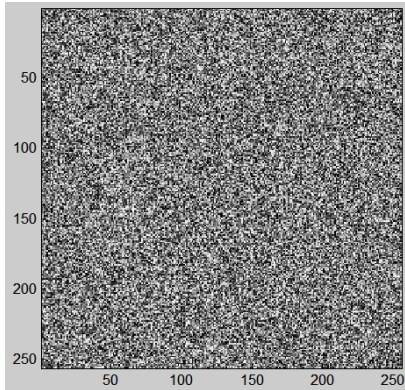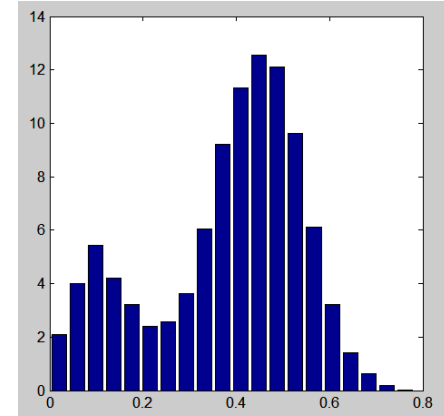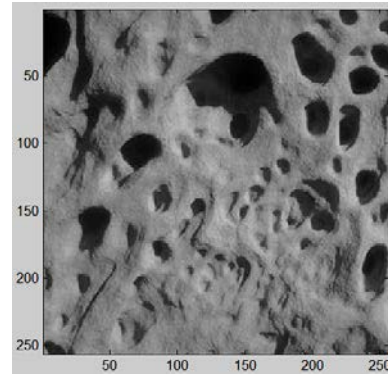




$$Y' = f(Y)$$

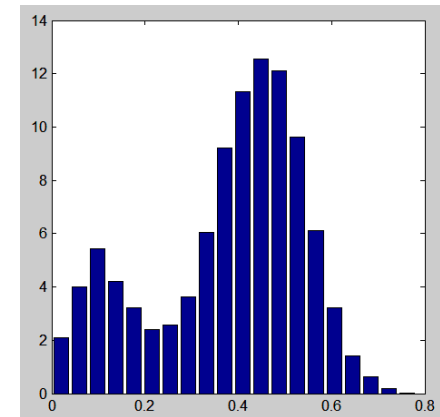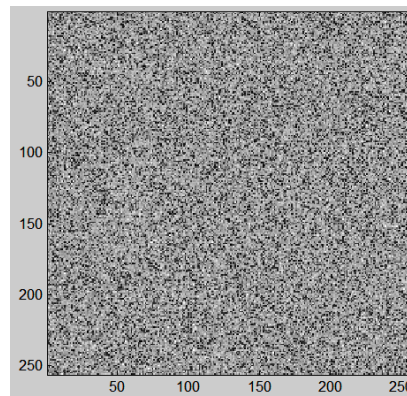

Another example: Matching histograms

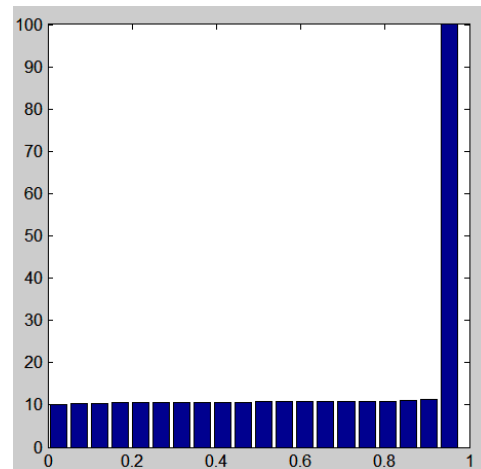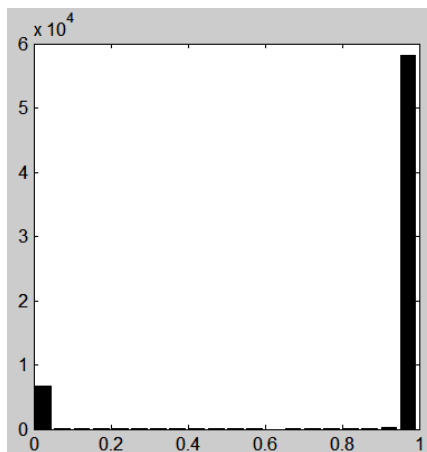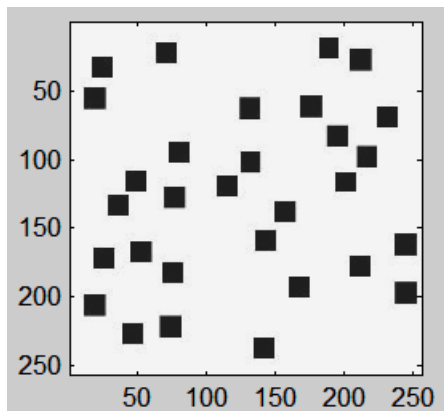

10% of pixels are black and 90% are white

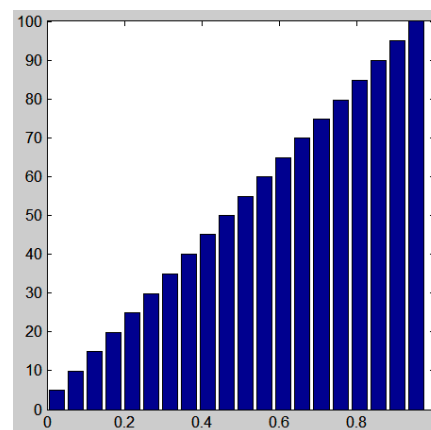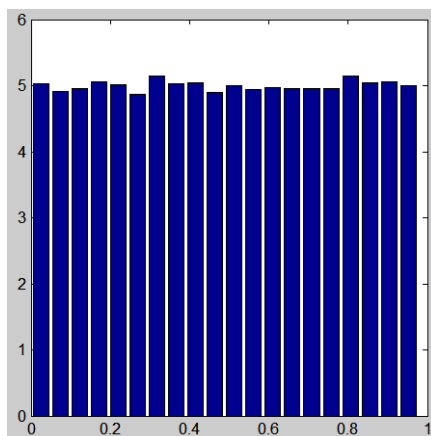
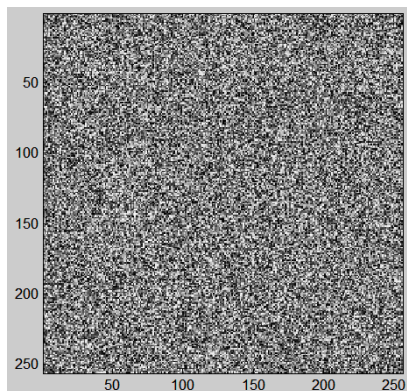


5% of pixels have an intensity value within the range[0.37, 0.41]


Another example: Matching histograms

The function f is just a look up table: it says, change all the pixels of value Y into a value $f(Y)$.

$$Y' = f(Y)$$

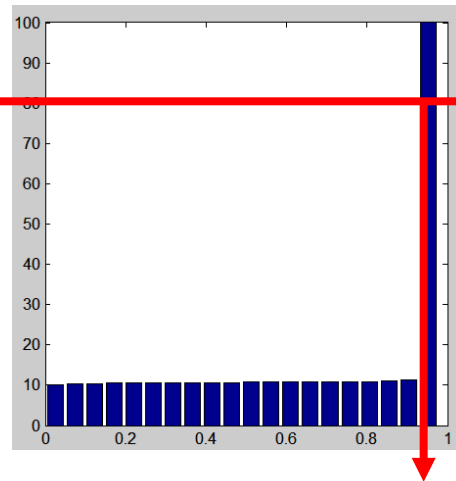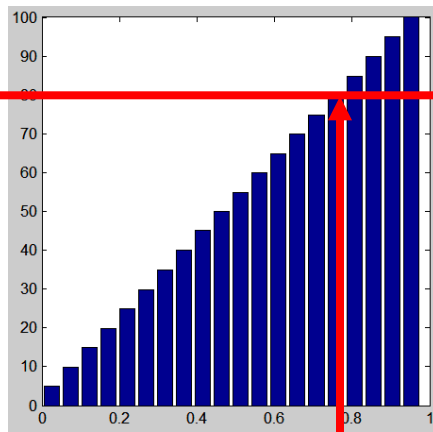


$Y(x,y)$


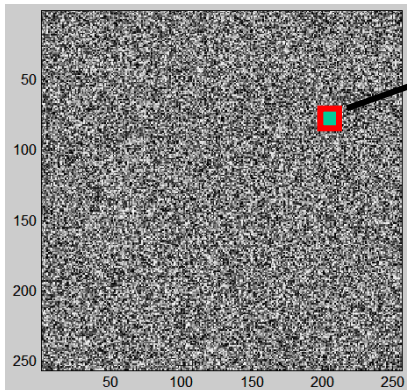


$Y = 0.8$
Original
intensity

$Y' = 1$
New
intensity








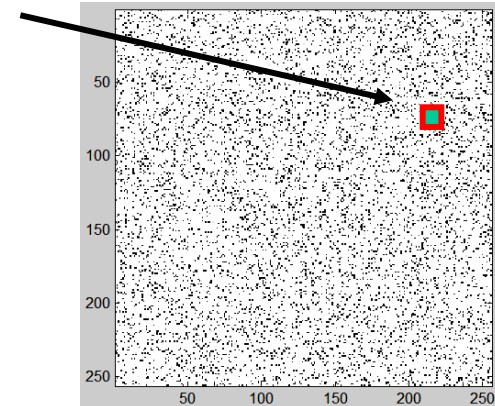


Another example: Matching histograms


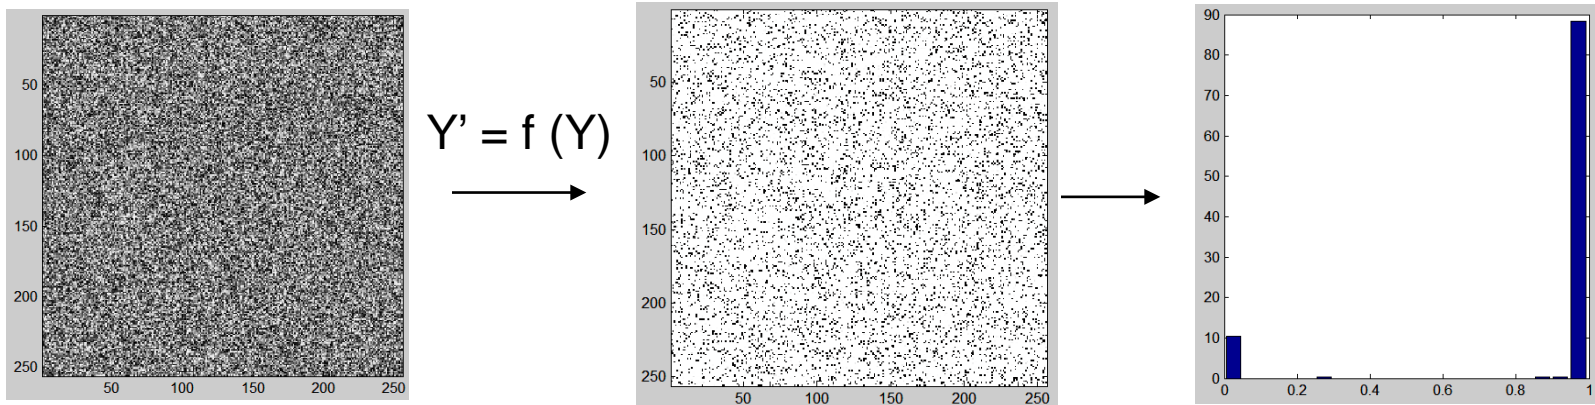
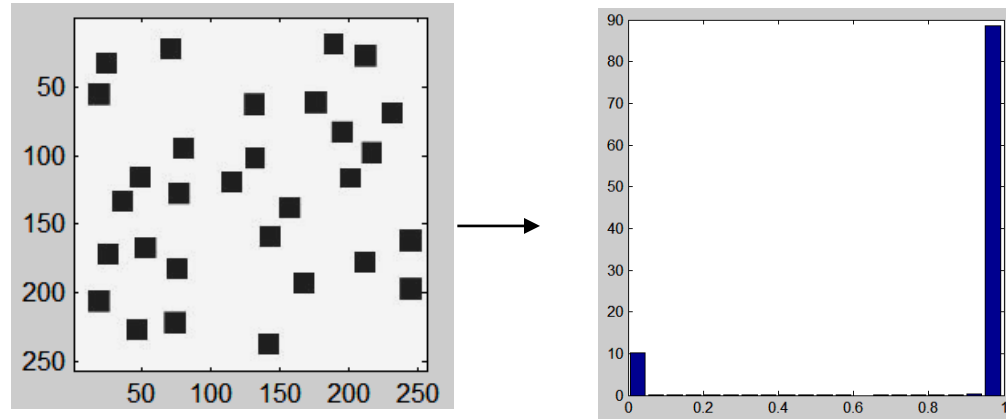


In this example, f is a step function.



Matching histograms of a subband

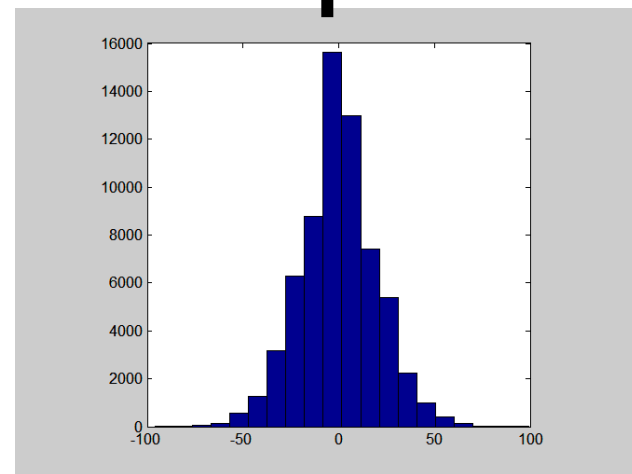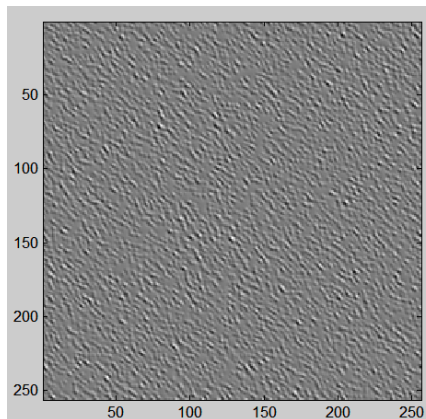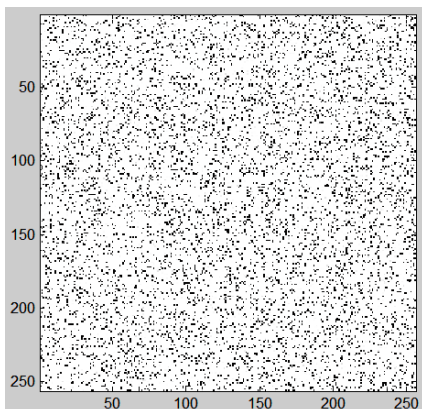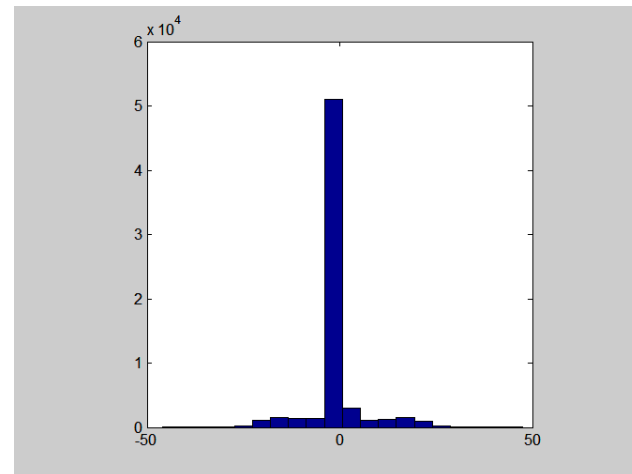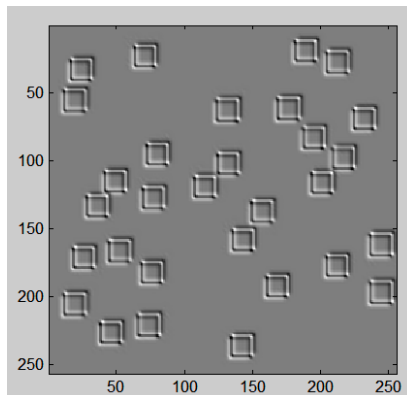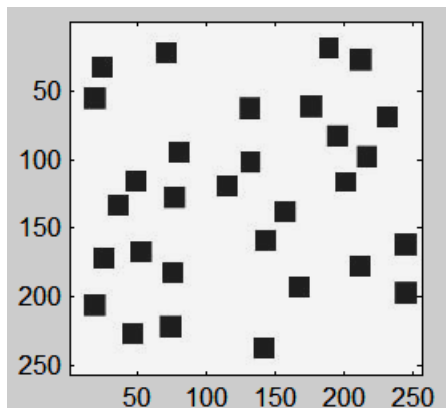

Matching histograms of a subband

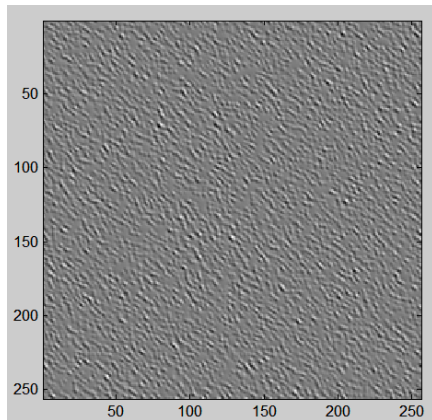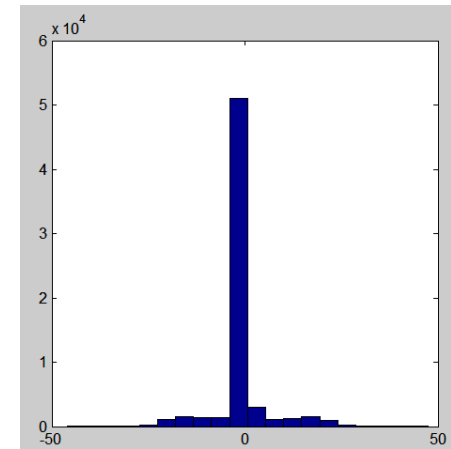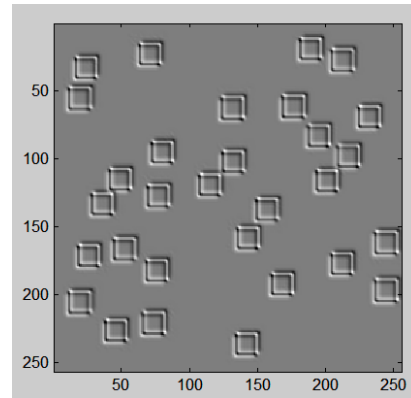

$$Y' = f(Y)$$

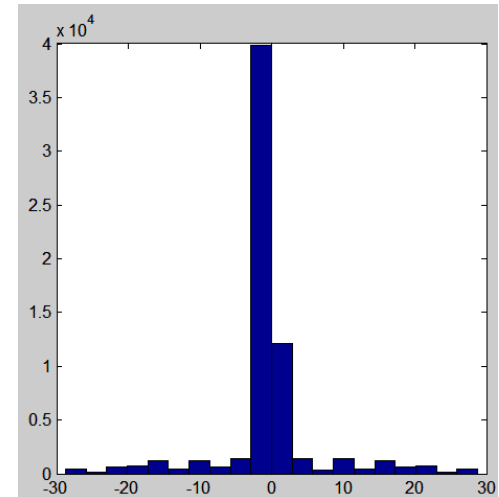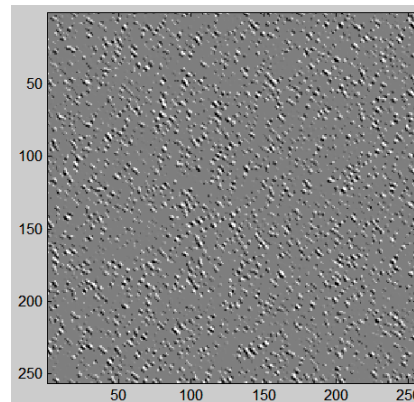


Texture analysis




Wavelet decomposition (steerable pyr)

(histogram)

Input texture

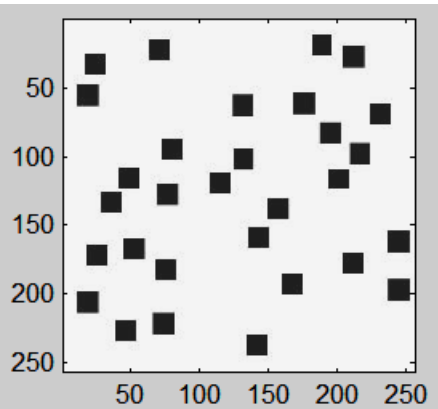

(histogram)

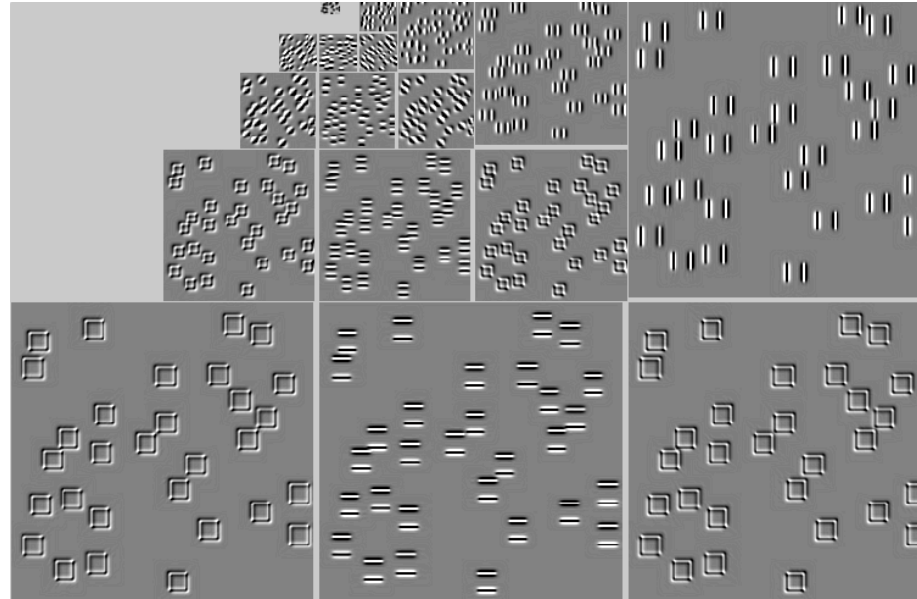









(Steerable pyr; Freeman & Adelson, 91)

The texture is represented as a collection of marginal histograms.


Texture synthesis

Heeger and Bergen, 1995

Input texture

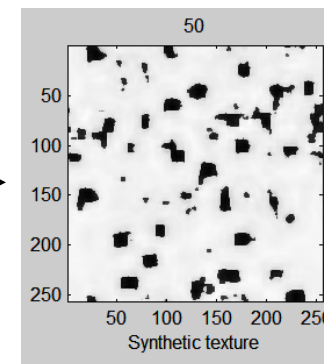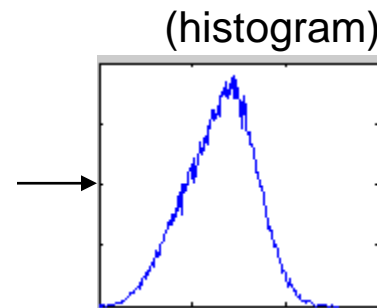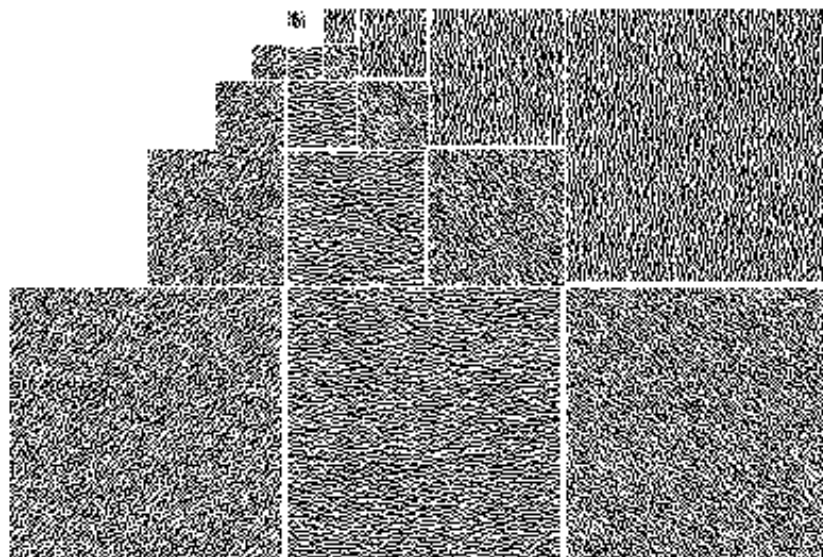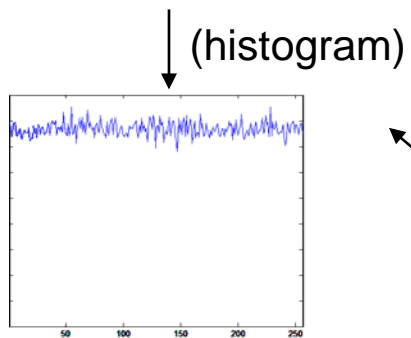


Why does it work? (sort of)


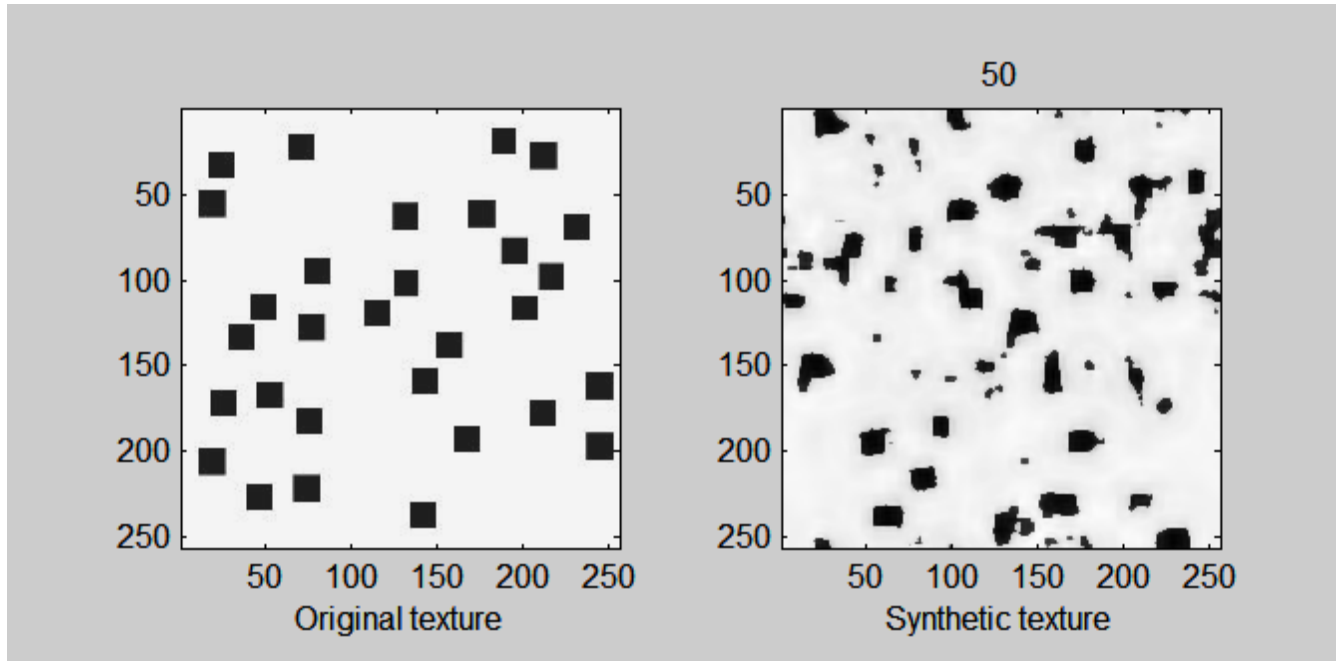


Why does it work? (sort of)


The black and white blocks appear by thresholding (f) a blobby image

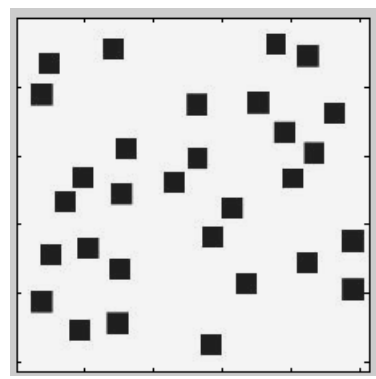




Iteration 0



Filter bank





...




Why does it work? (sort of)



















The black and white blocks appear by thresholding (f) a blobby image

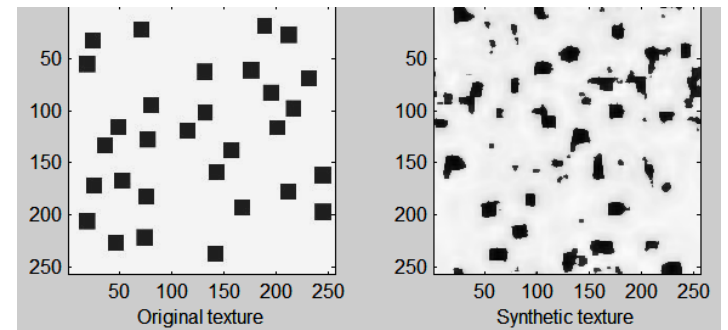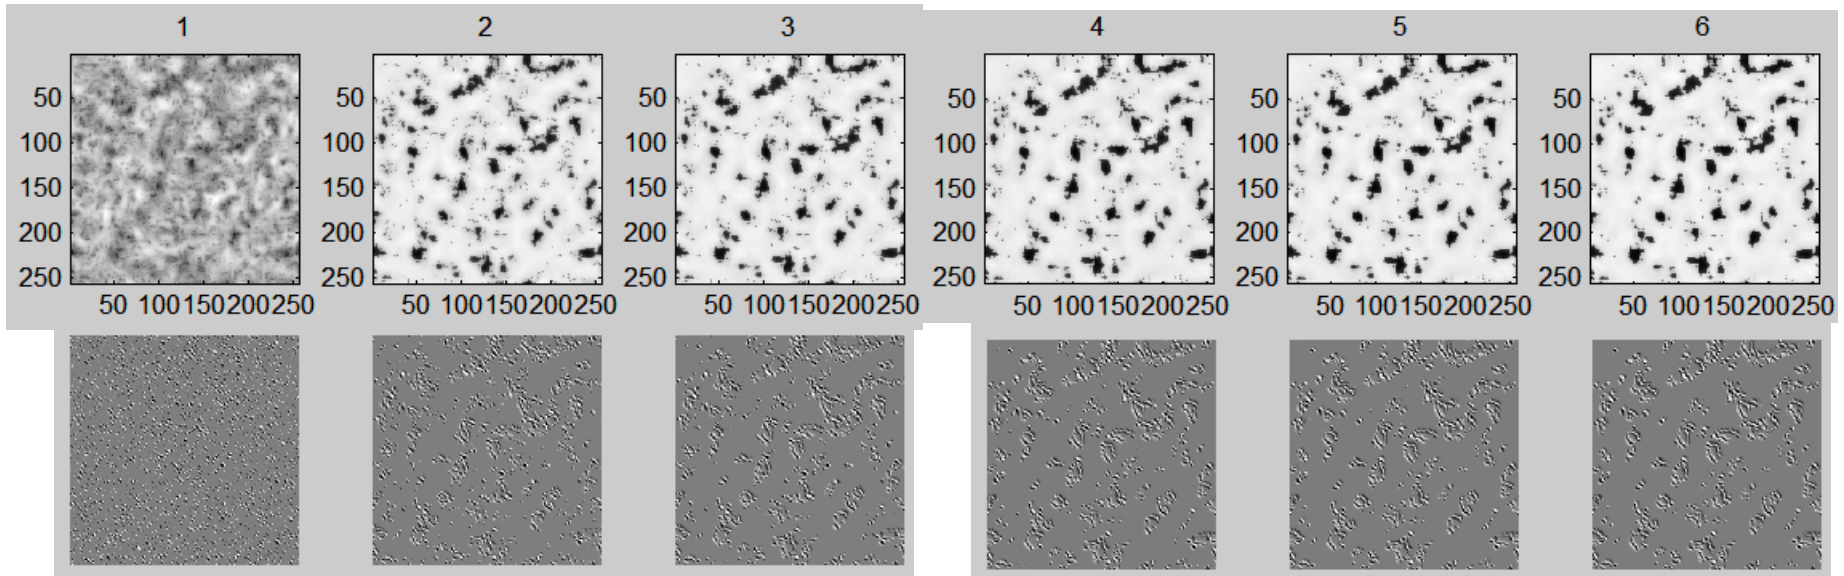

Why does it work? (sort of)



After 6 iterations

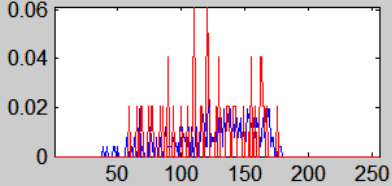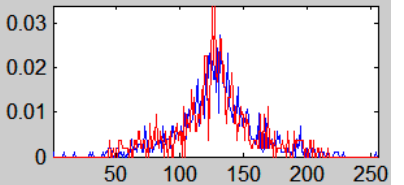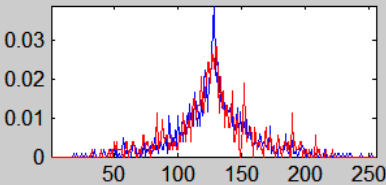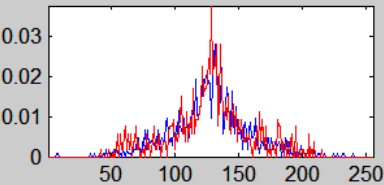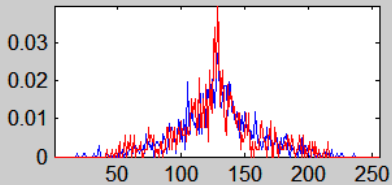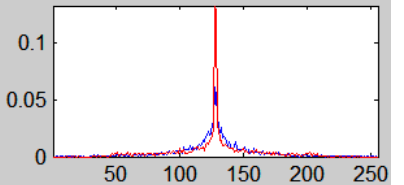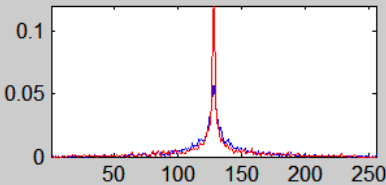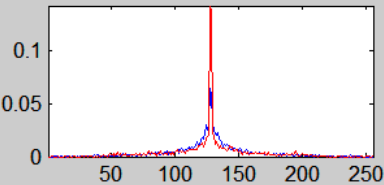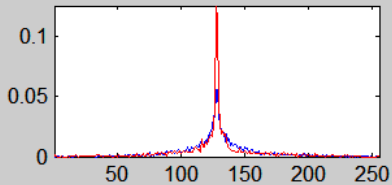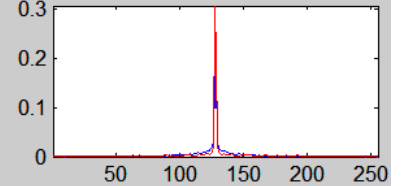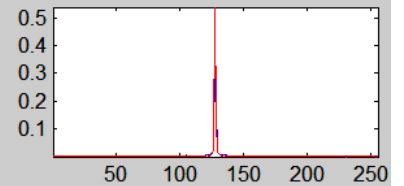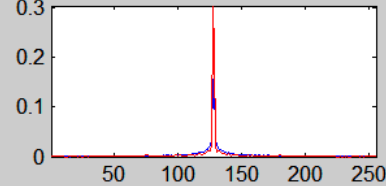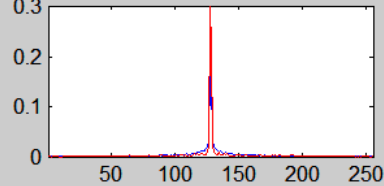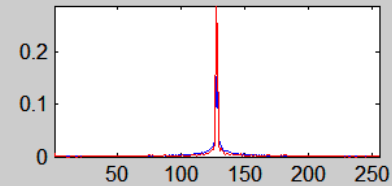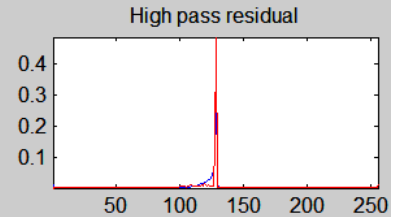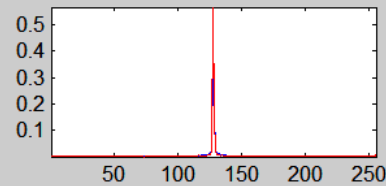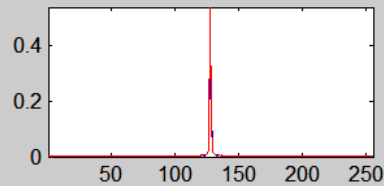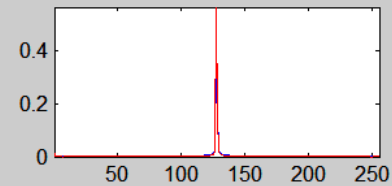


Low pass residual


Histograms match ok

red = target histogram, blue = current iteration


Color textures

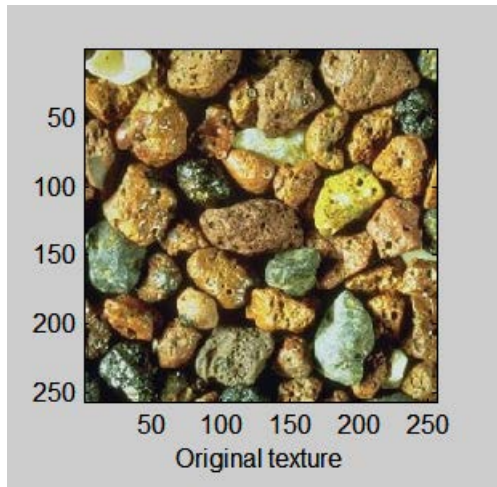


R

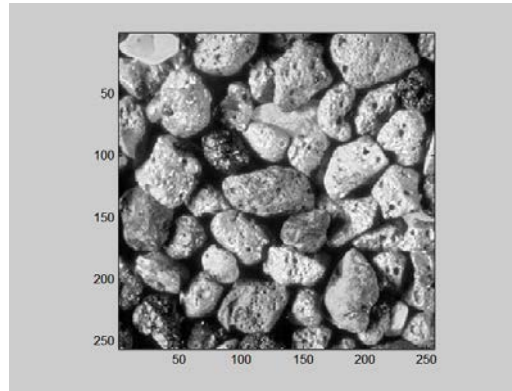

G

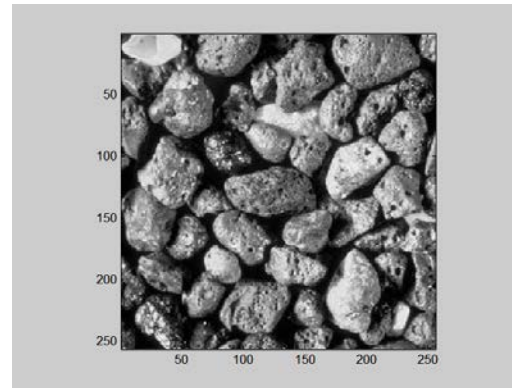


B

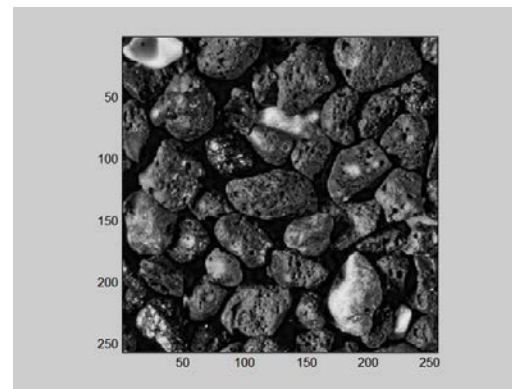


Three textures

Color textures

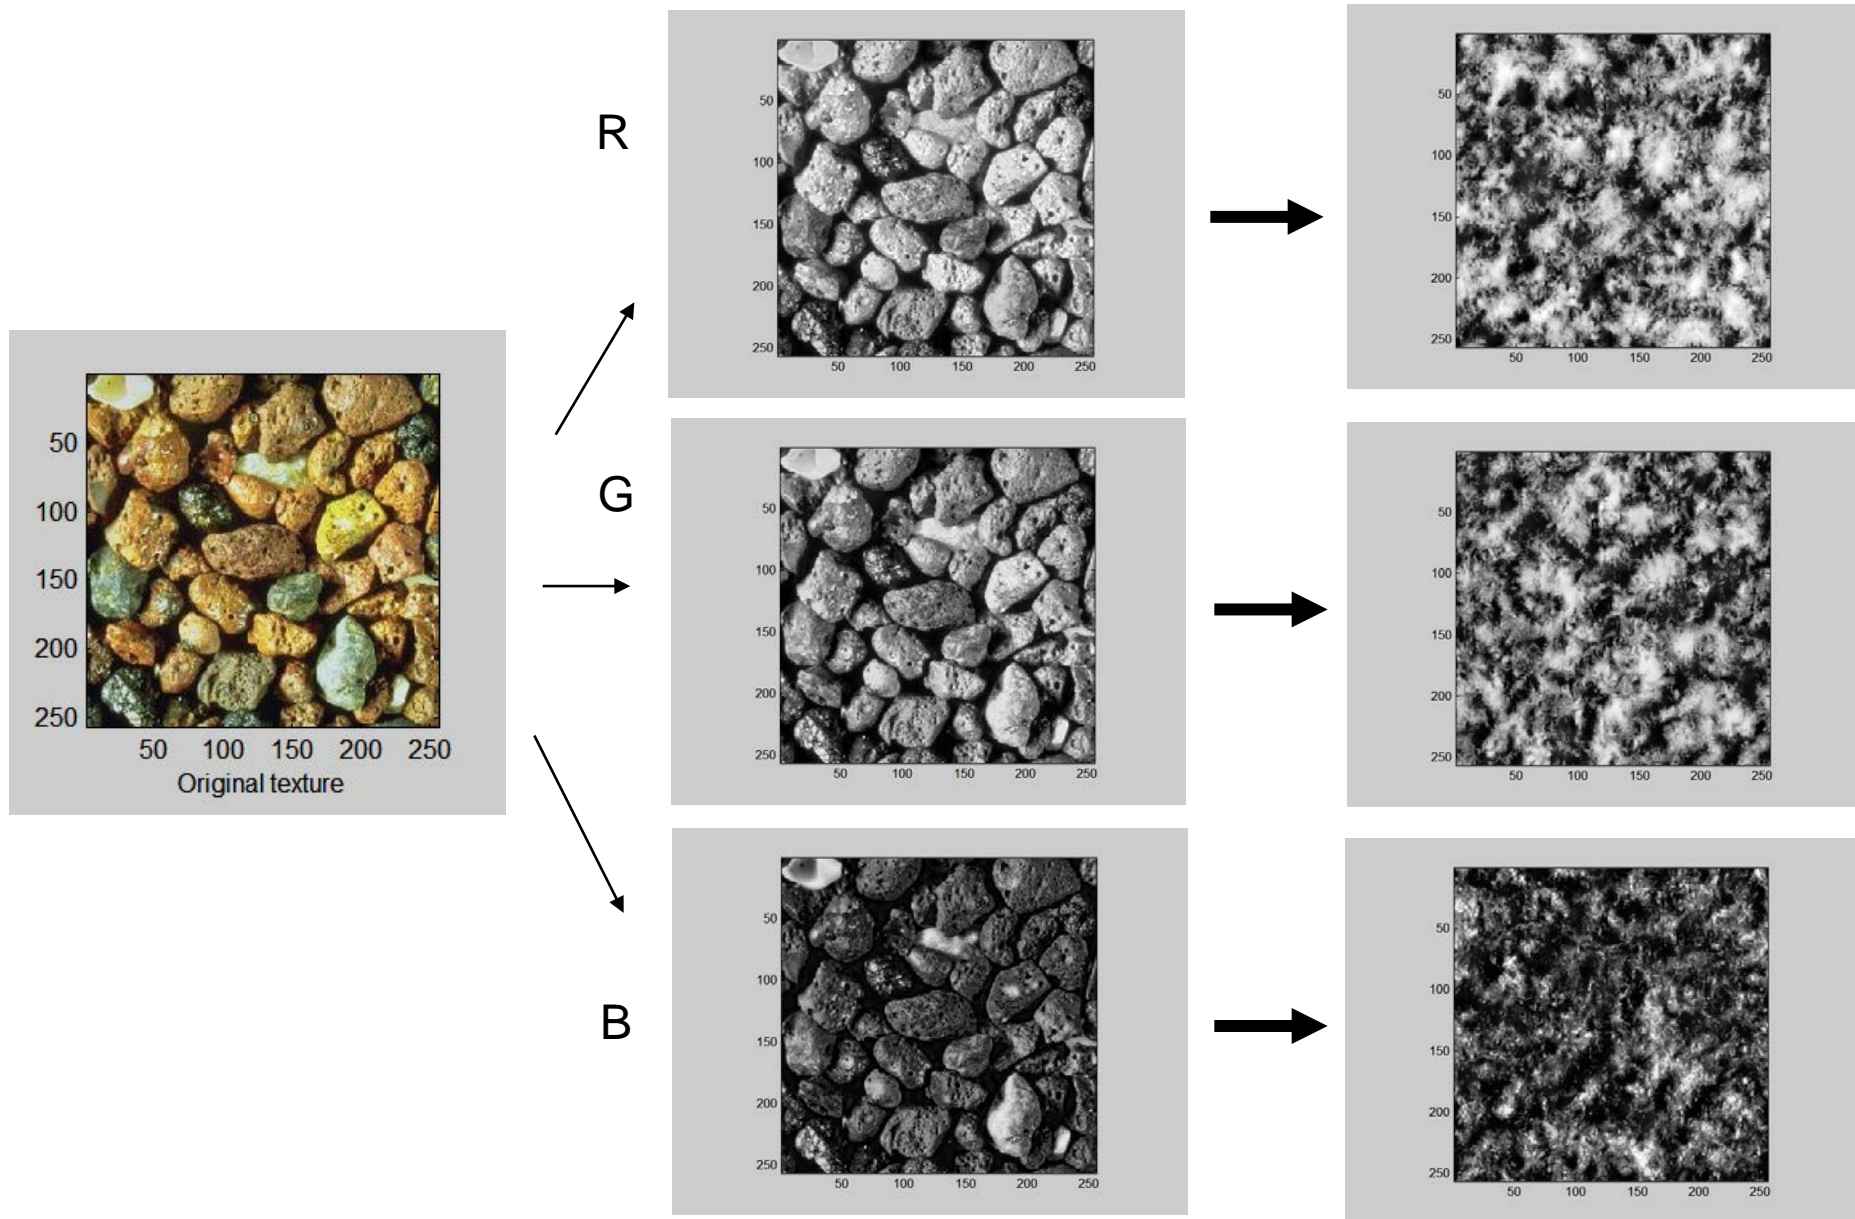


Color textures


R

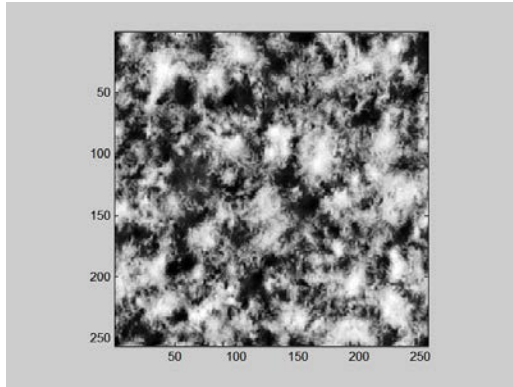

G


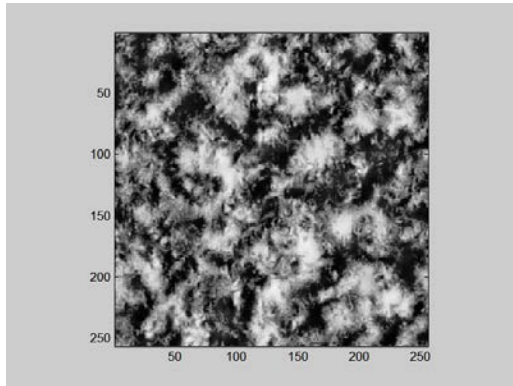


B

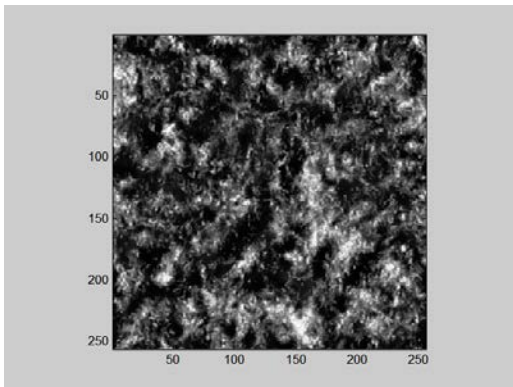

This does not work




6

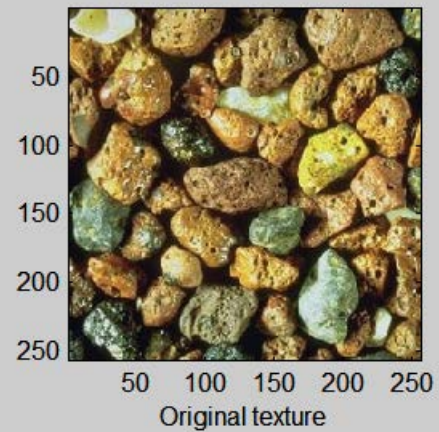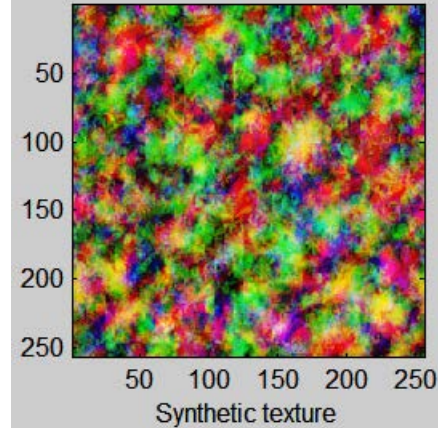




Color textures

Problem: we create new colors not present in the original image.



Why? Color channels are not independent.

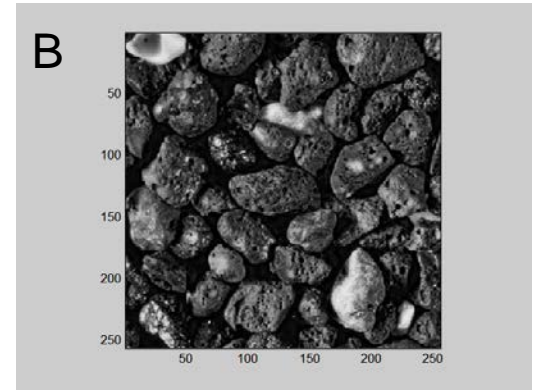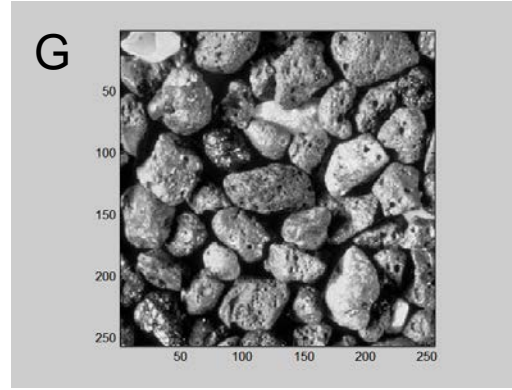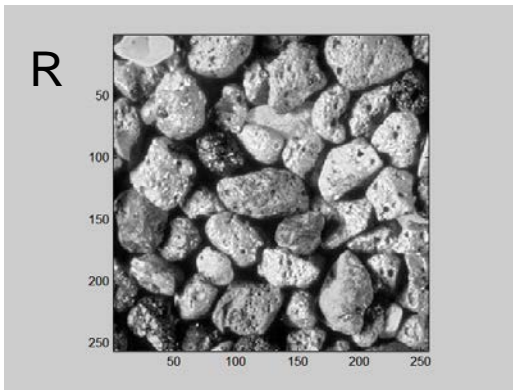

PCA and decorrelation

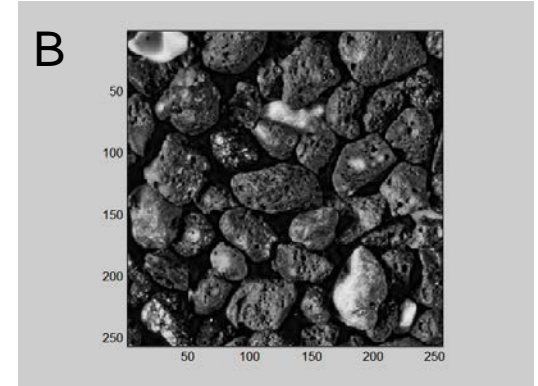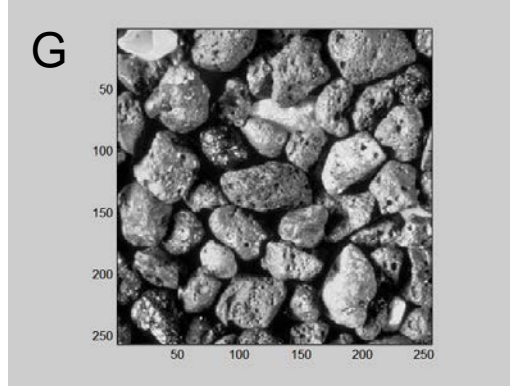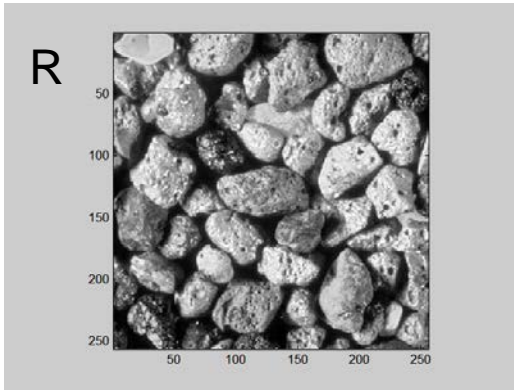


In the original image, R and G are correlated, but, after synthesis,...

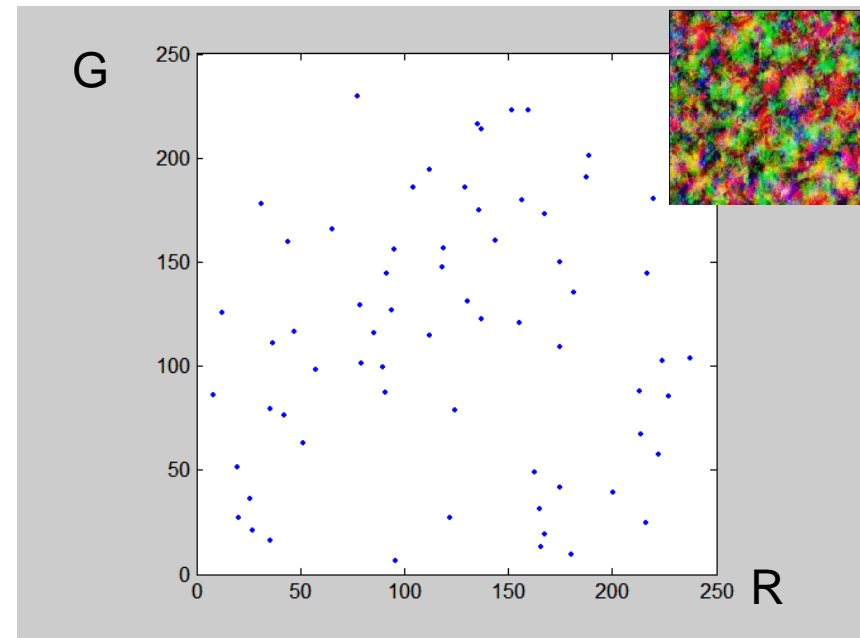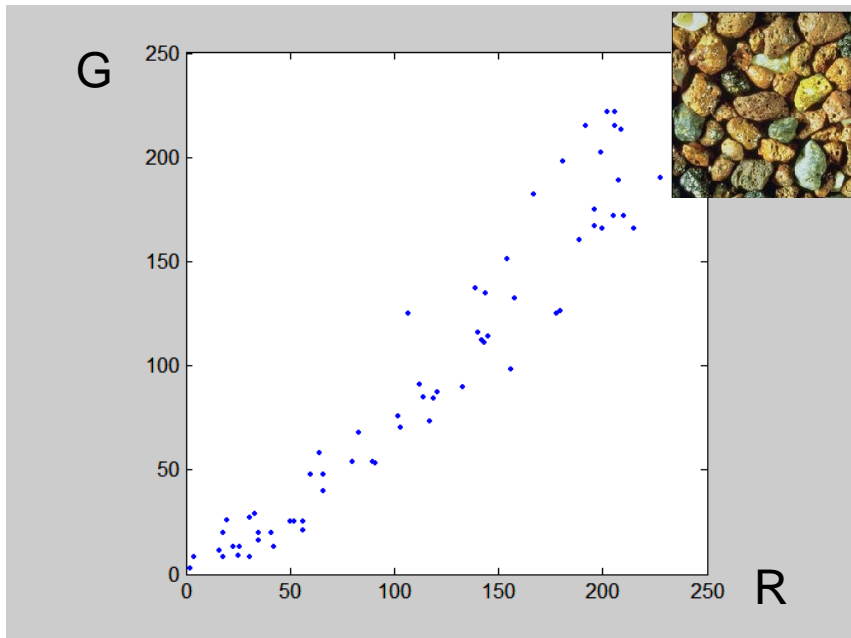


PCA and decorrelation

The texture synthesis algorithm assumes that the channels are independent.

What we want to do is some rotation

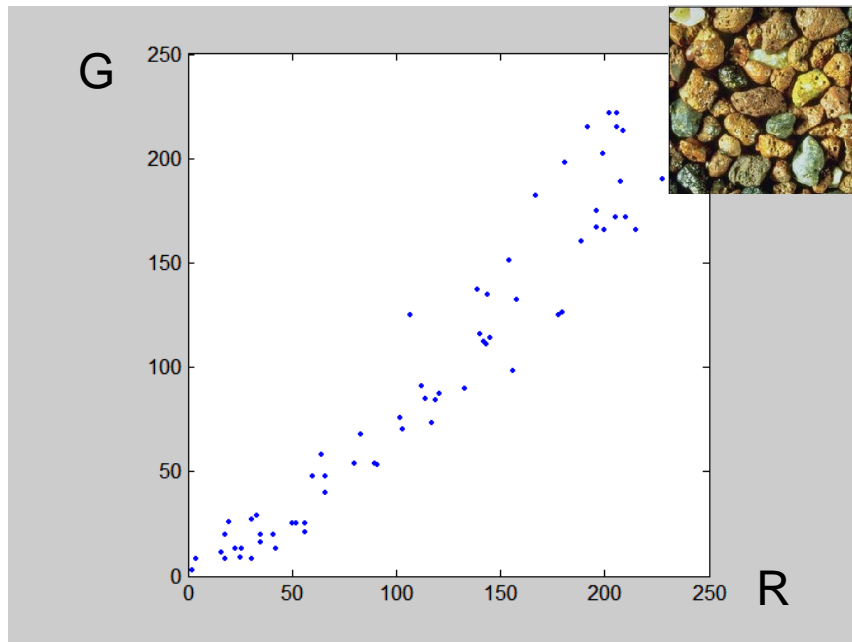


Rotation

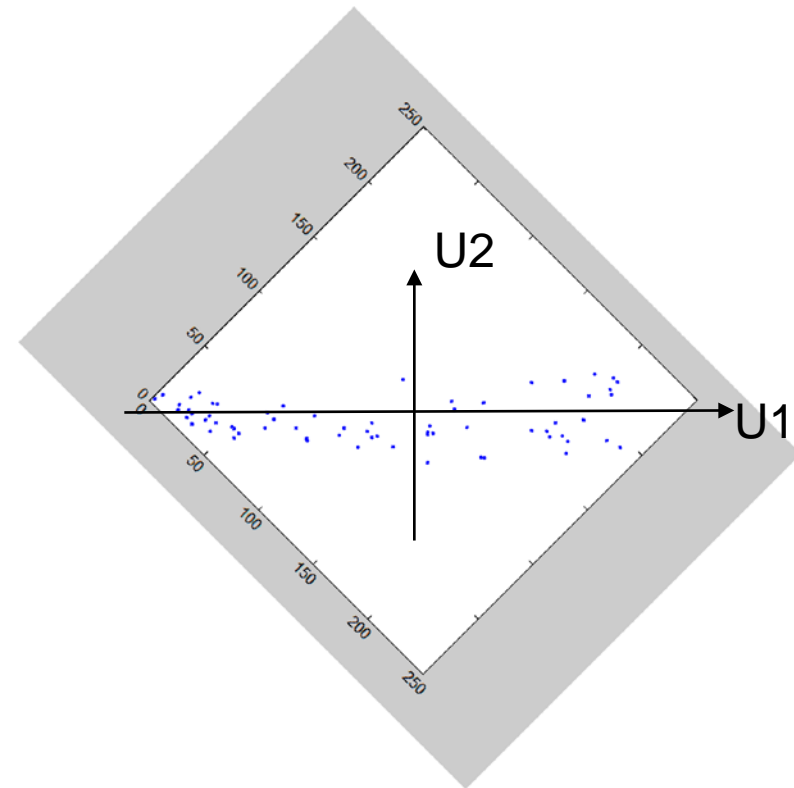

See that in this rotated space, if I specify one coordinate the other remains unconstrained.

PCA and decorrelation

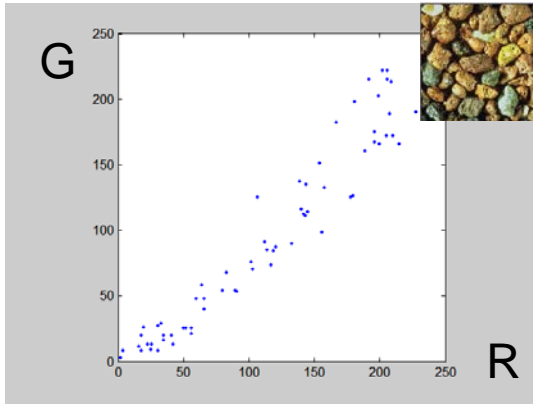

$$C = \begin{matrix} & \text{correlation}(R,G) & & \\ & \nearrow & & \\ \begin{matrix} 1.0000 & 0.9303 & 0.6034 \\ 0.9303 & 0.9438 & 0.6620 \\ 0.6034 & 0.6620 & 0.5569 \end{matrix} \end{matrix}$$


PCA finds the principal directions of variation of the data.
It gives a decomposition of the covariance matrix as:

$$C = D D' \quad D = \begin{matrix} 0.6347 & 0.6072 & 0.4779 \\ 0.6306 & -0.0496 & -0.7745 \\ 0.4466 & -0.7930 & 0.4144 \end{matrix}$$

By transforming the original data (RGB) using D we get:


$$\begin{matrix} U1 \\ U2 \\ U3 \end{matrix} \begin{matrix} \text{---} \\ \text{---} \\ \text{---} \end{matrix} = \begin{matrix} D' \\ \text{---} \\ \text{---} \end{matrix} \begin{matrix} R \\ G \\ B \end{matrix} \begin{matrix} \text{---} \\ \text{---} \\ \text{---} \end{matrix}$$

$3 \times \text{Npixels}$
 3×3
 $3 \times \text{Npixels}$

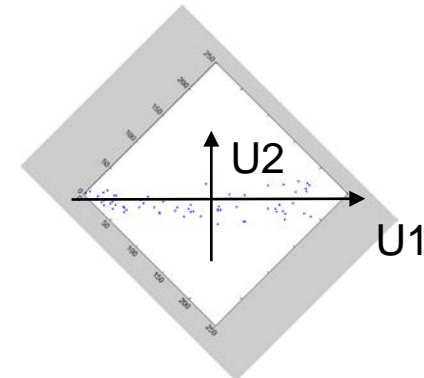

The new components (U1,U2,U3) are decorrelated.


Color textures

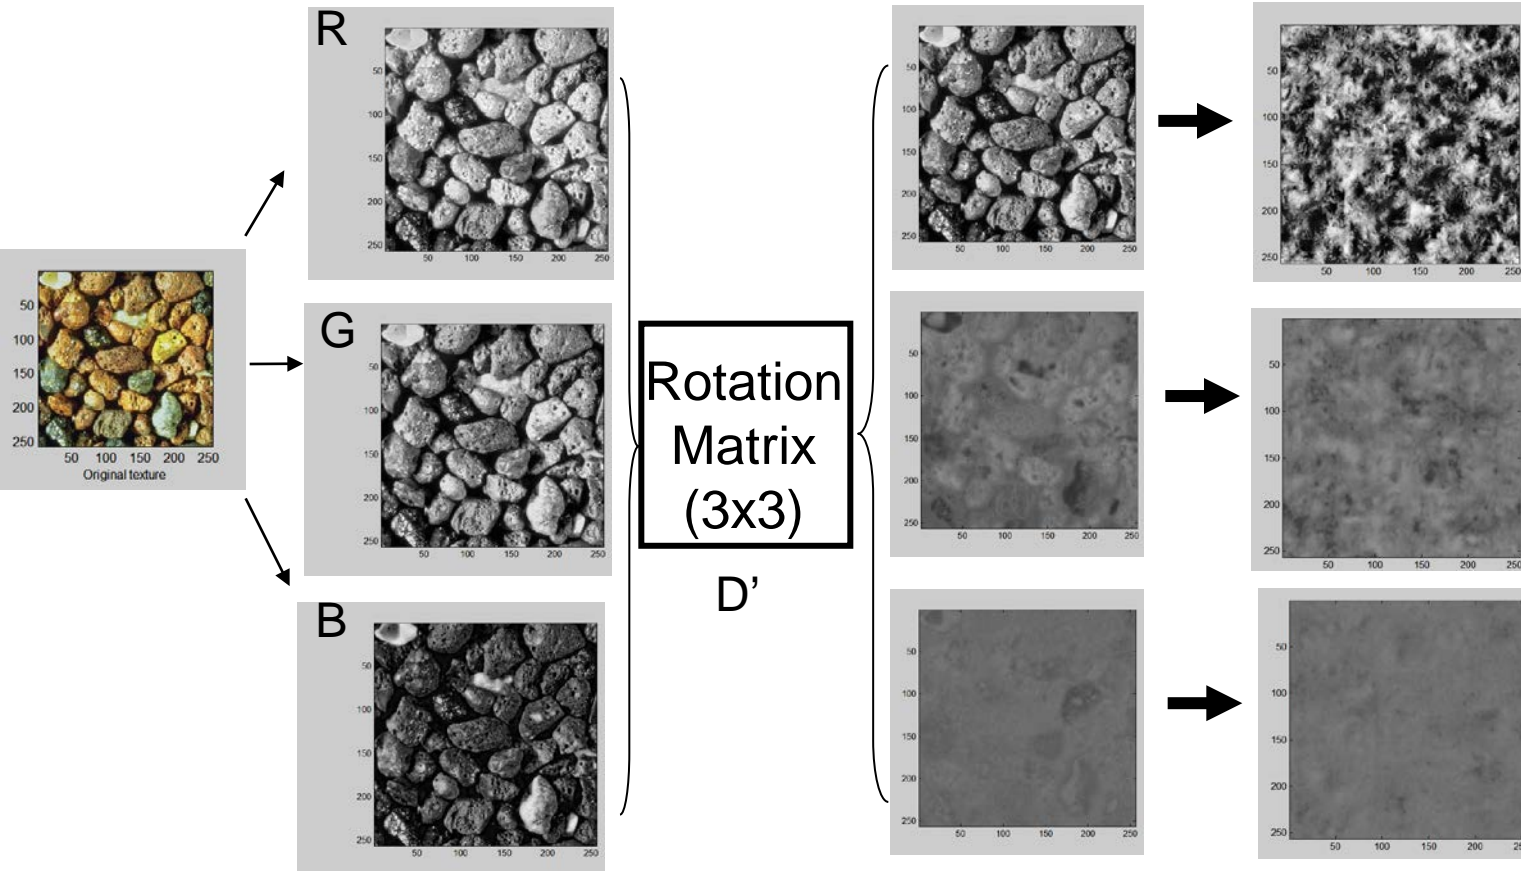


These three textures
look similar
(high dependency)

These three textures
Look less similar
(lower dependency)

Color textures

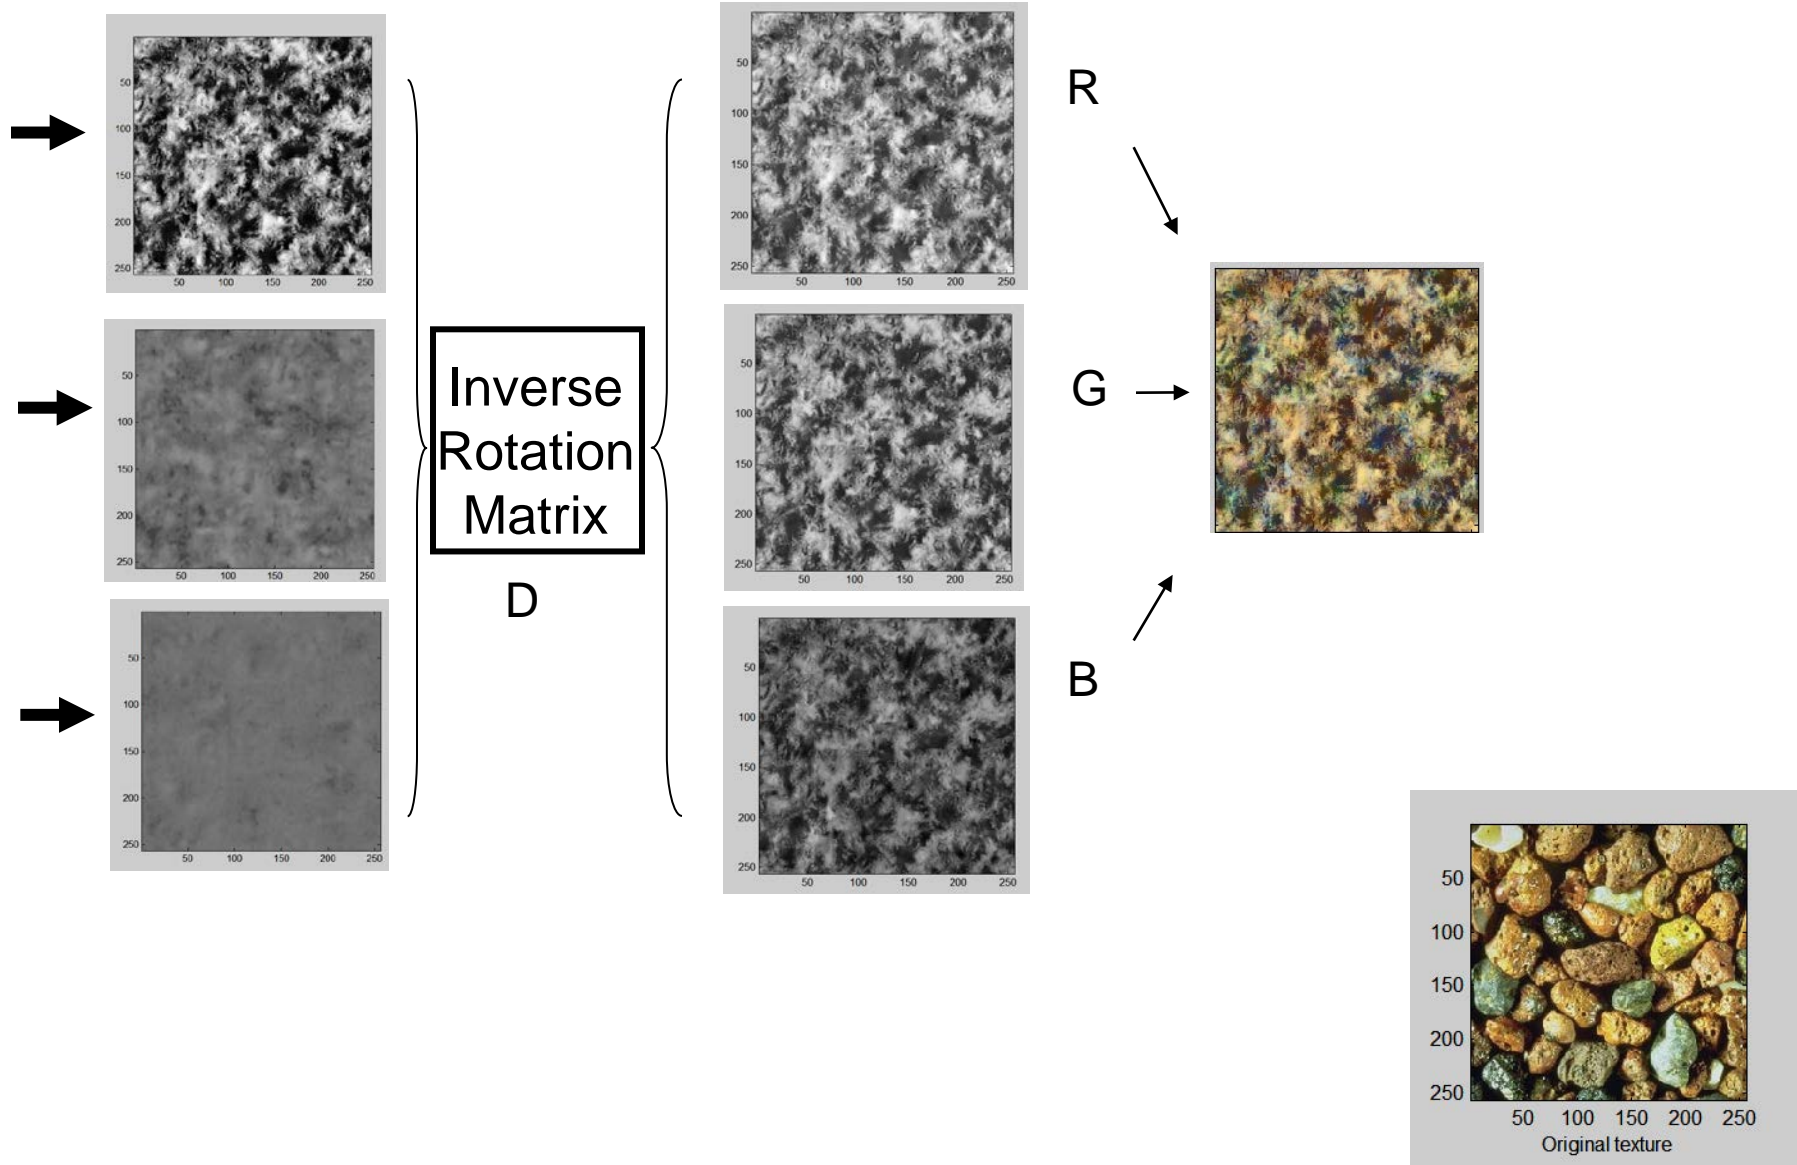


Color textures

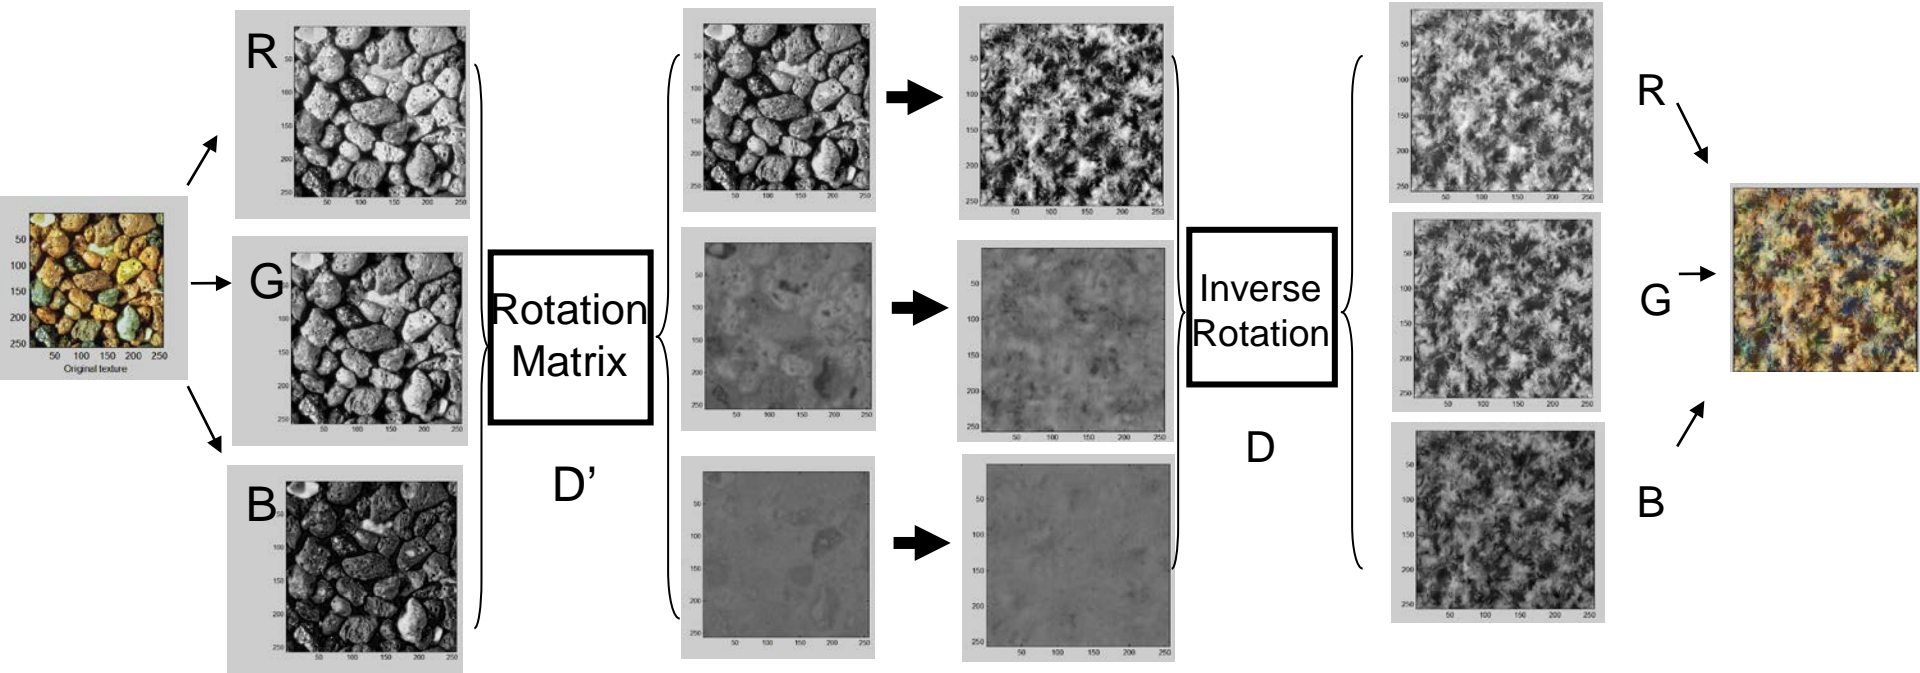

These three textures look similar (high dependency)


These three textures look less similar (lower dependency)

Color channels

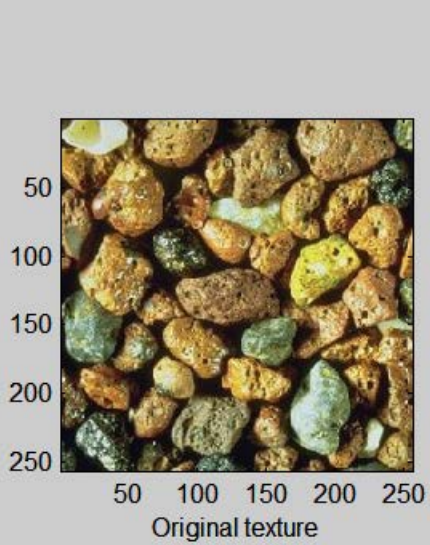


Without PCA

6



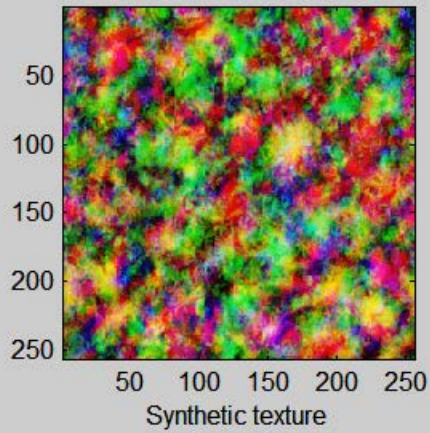


With PCA


6

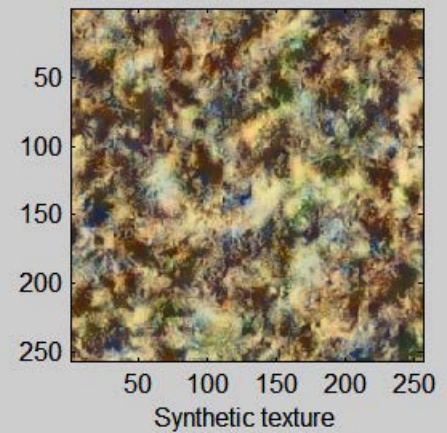

Color channels

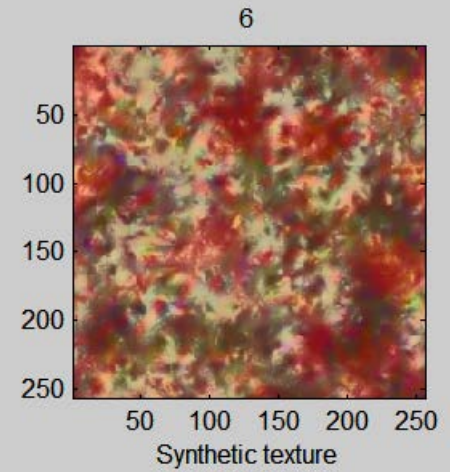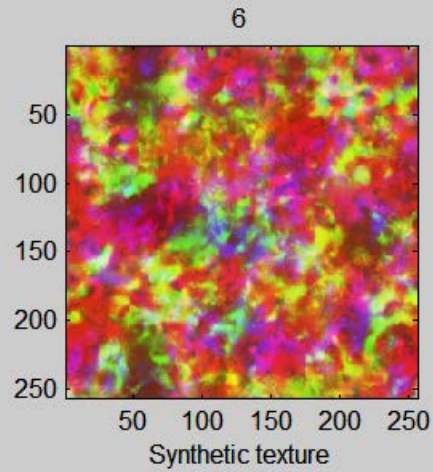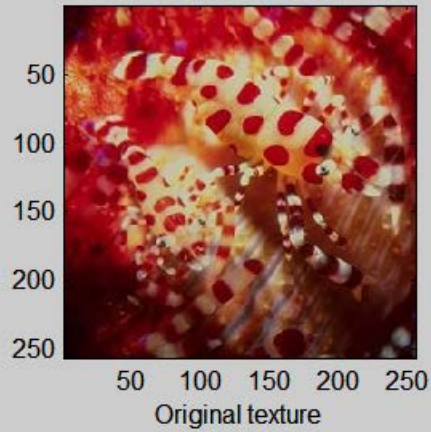

Color channels

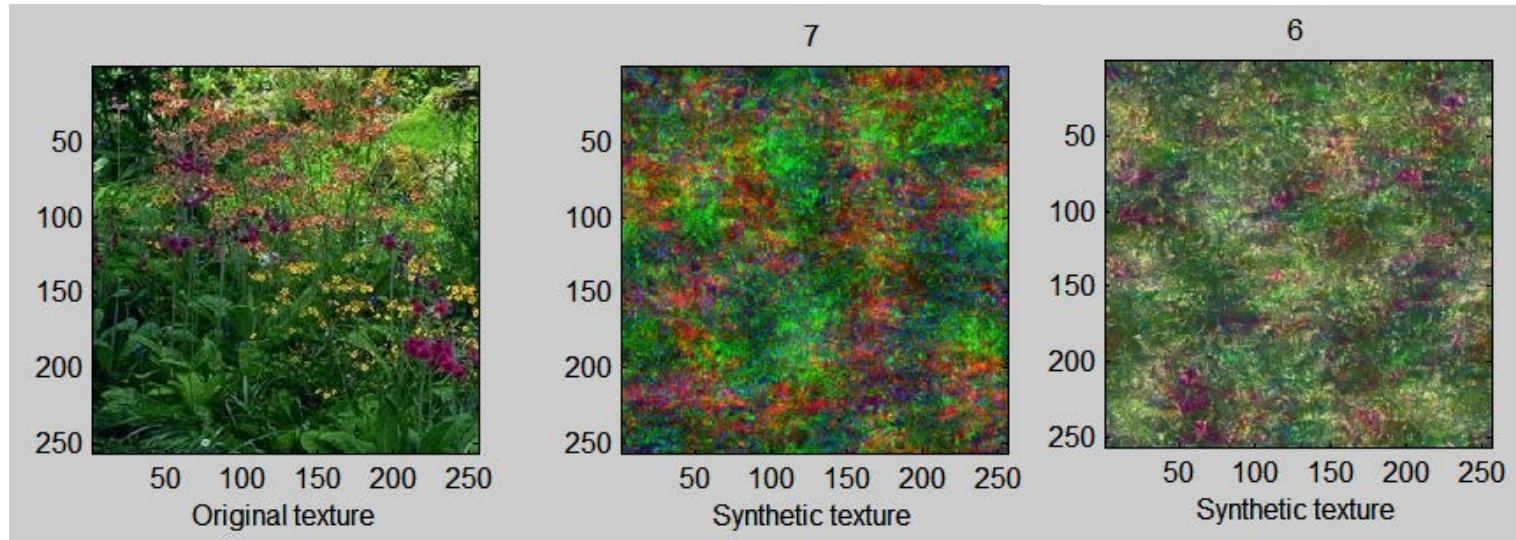

Examples from the paper

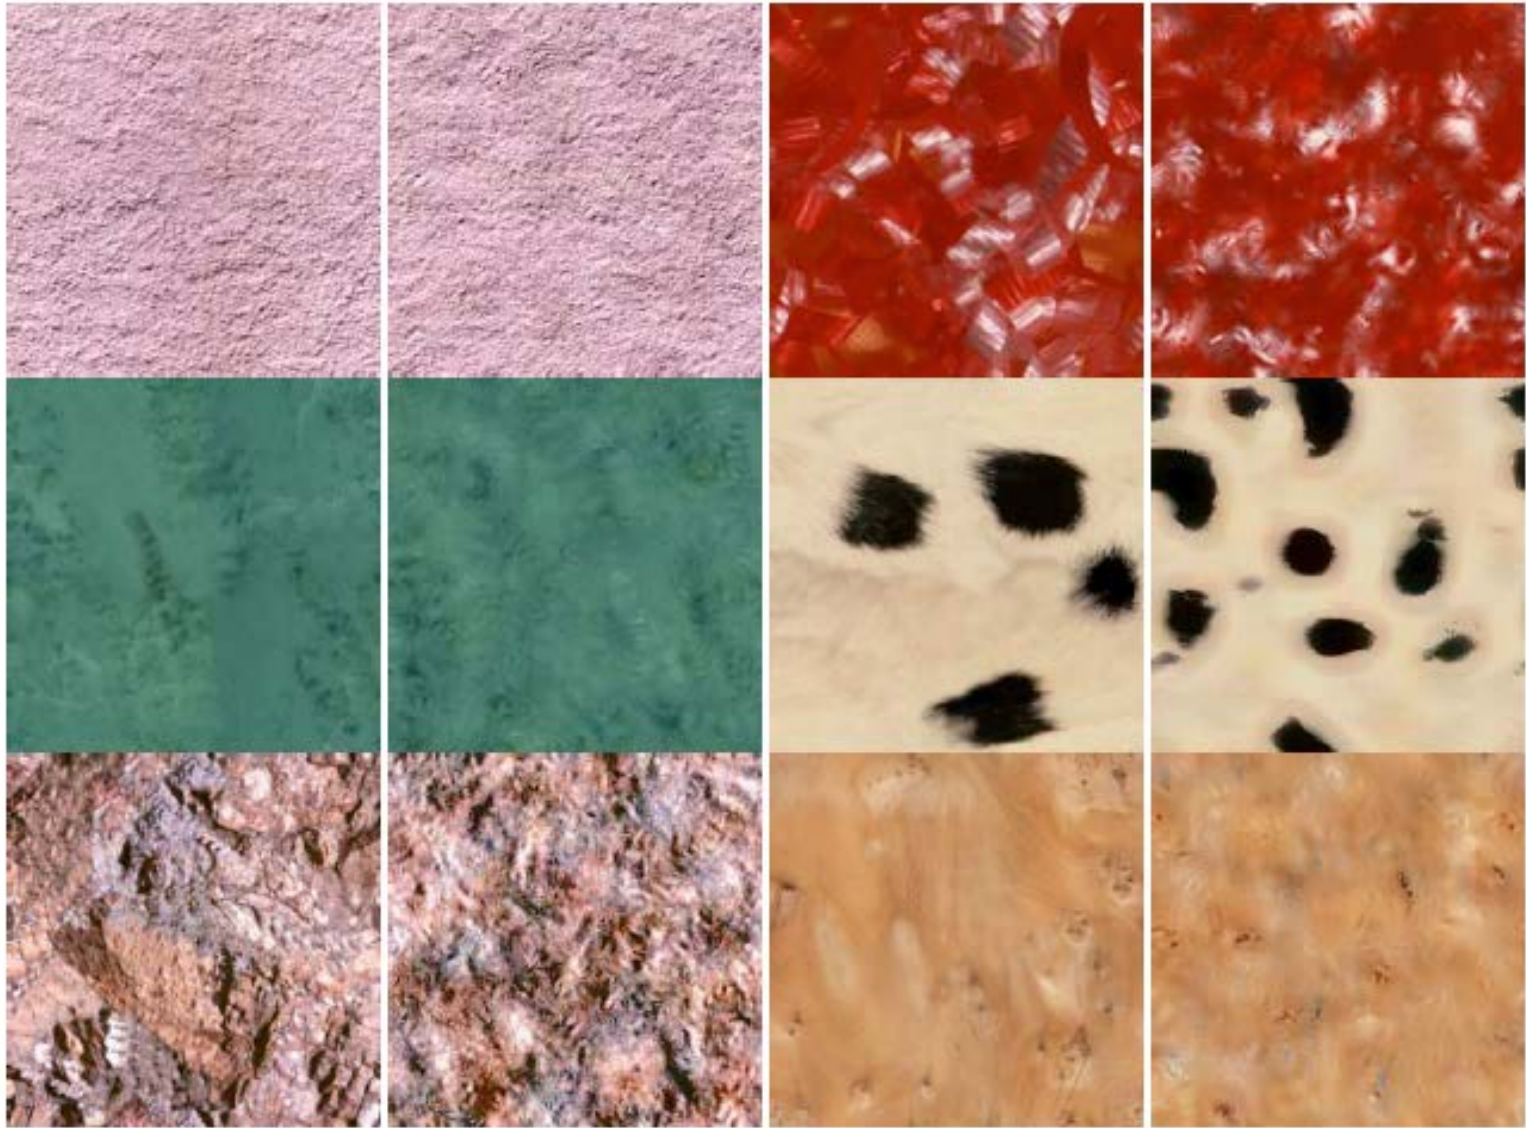


Figure 3: In each pair left image is original and right image is synthetic: stucco, iridescent ribbon, green marble, panda fur, slag stone, figured yew wood.

Examples from the paper




Figure 4: In each pair left image is original and right image is synthetic: red gravel, figured sepele wood, broccoli, bark paper, denim, pink wall, ivy, grass, sand, surf.

Examples not from the paper

Input
texture




Synthetic
texture

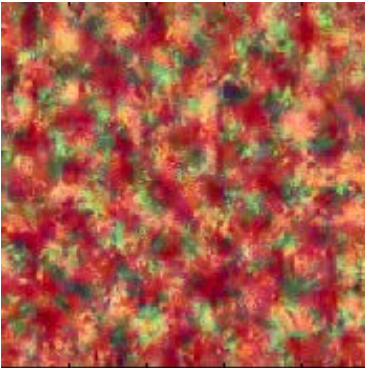

But, does it really work even when it seems to work?


But, does it really work???

How to measure how well the representation
constraints the set of equivalent textures?

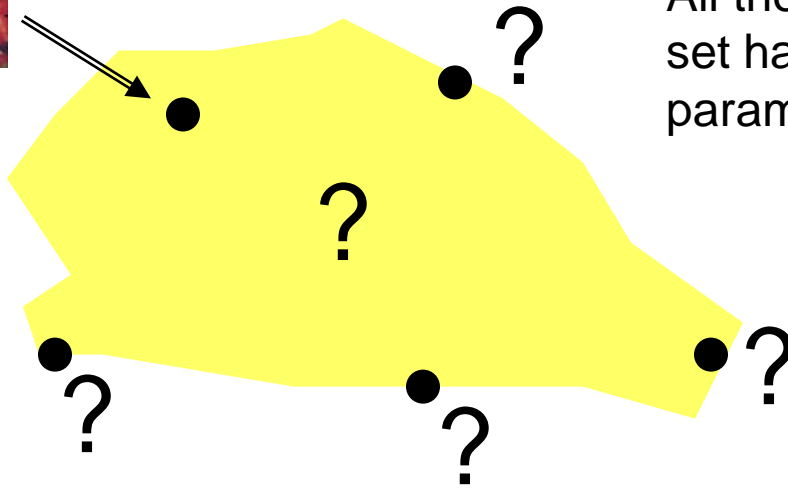

All the textures in this
set have the same
parameters.


How to identify the set of equivalent textures?

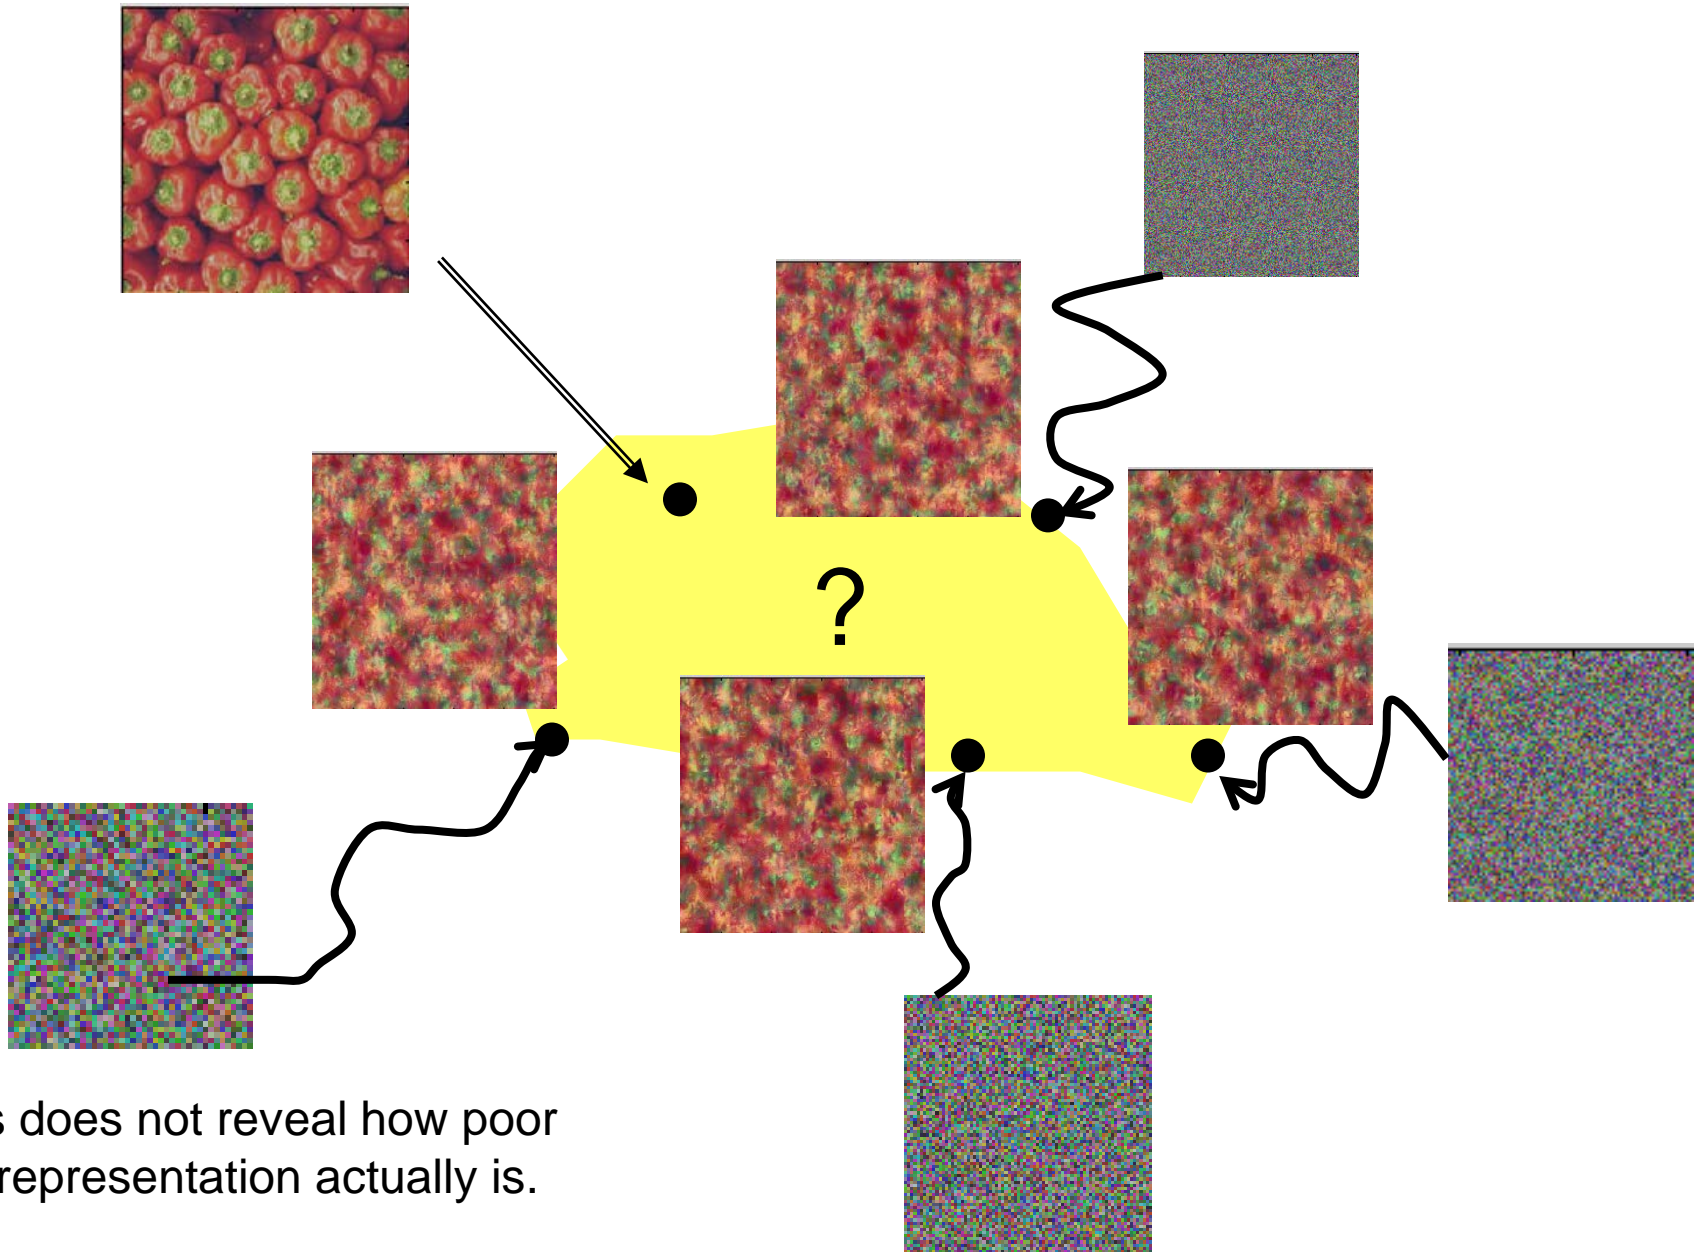

This does not reveal how poor the representation actually is.



We need a space that is more perceptual

In a perceptual space all these noise images are very close. But in pixel space, they are very far away.


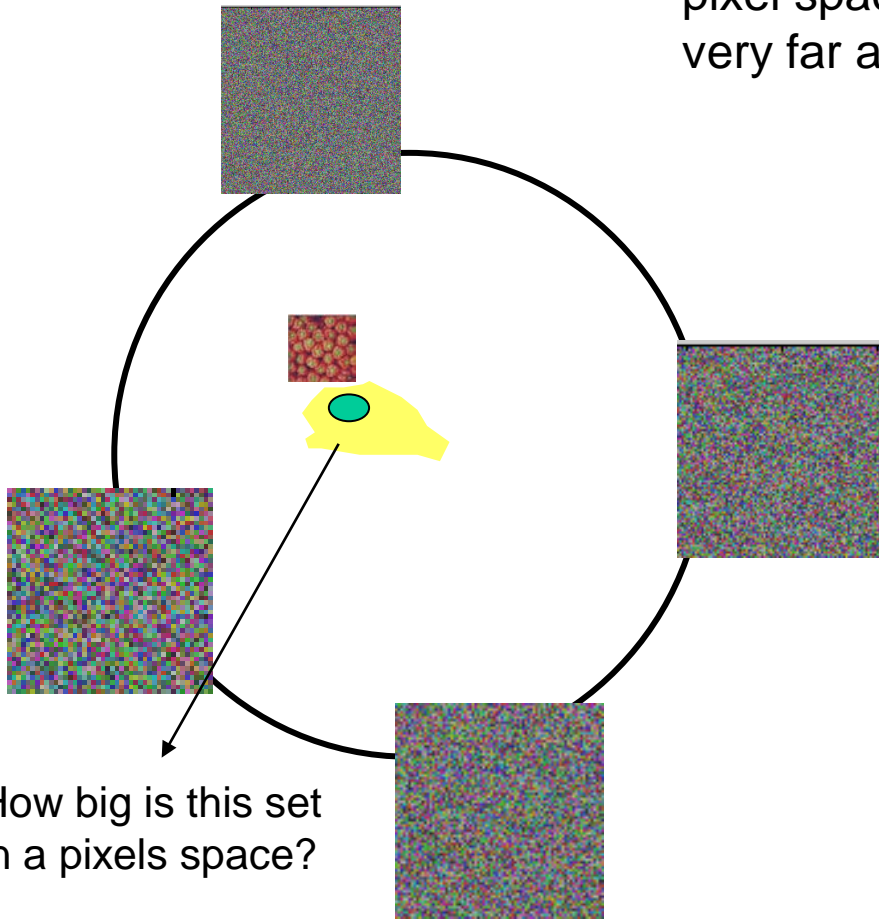


We need a space that is more perceptual



In a perceptual space all these noise images are very close. But in pixel space, they are very far away.

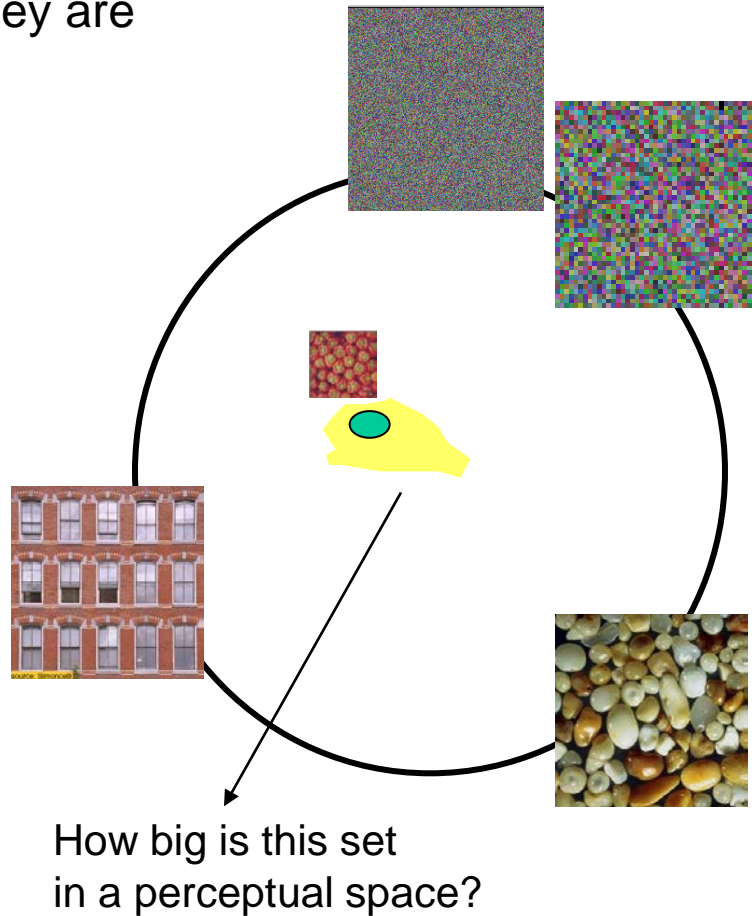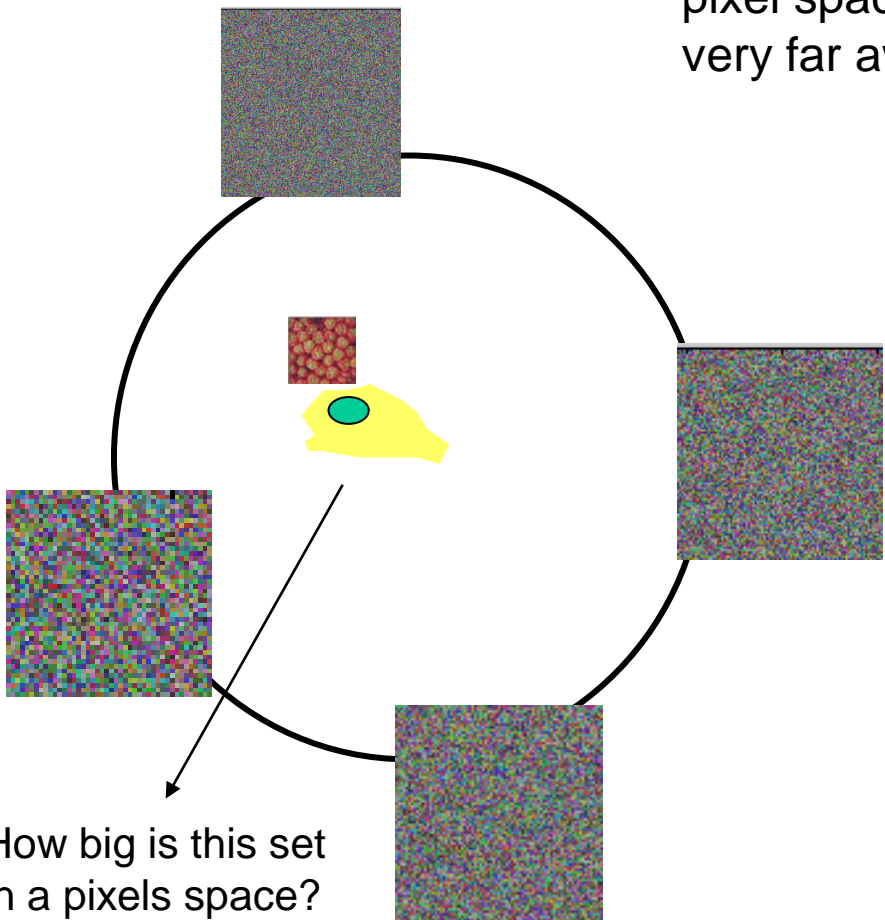


How to identify the set of equivalent textures?








These trajectories are more perceptually salient



How to identify the set of equivalent textures?

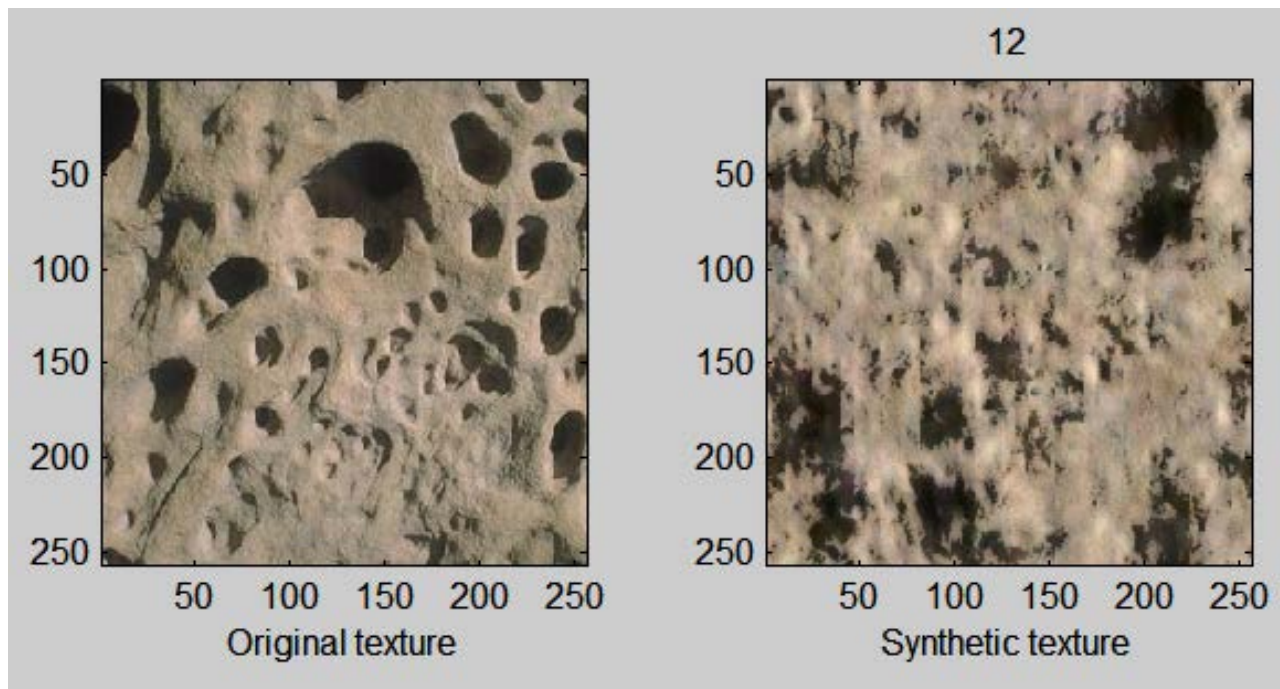

How to identify the set of equivalent textures?



These trajectories are more perceptually salient





source: Simoncelli



Portilla and Simoncelli

- Parametric representation, based on Gaussian scale mixture prior model for images.
- About 1000 numbers to describe a texture.
- Ok results; maybe as good as DeBonet.


Portilla and Simoncelli

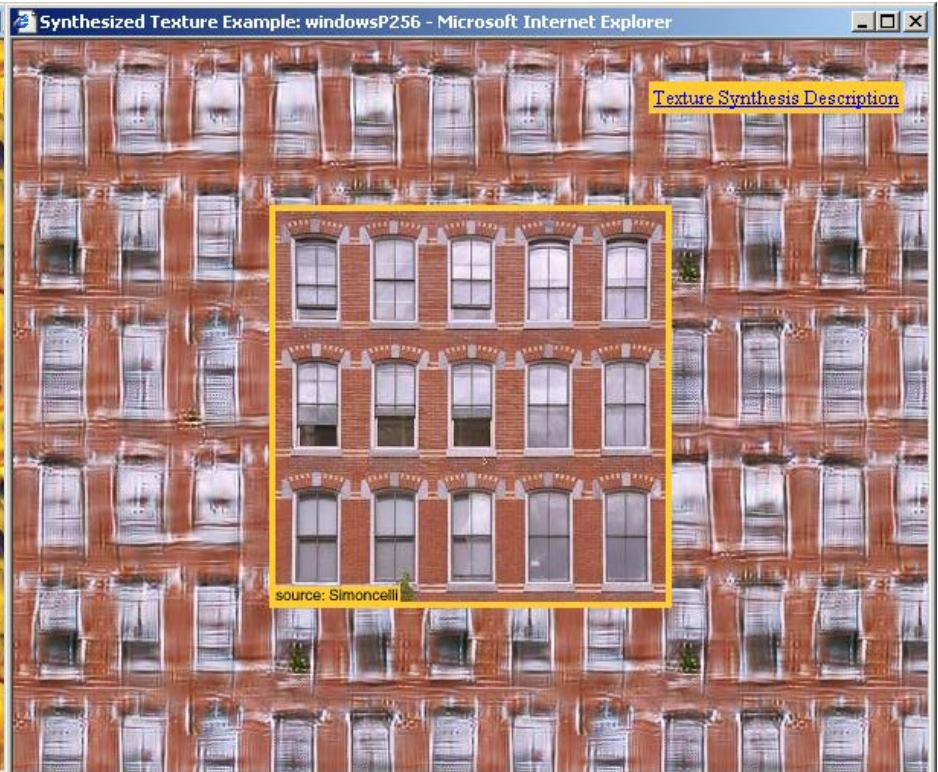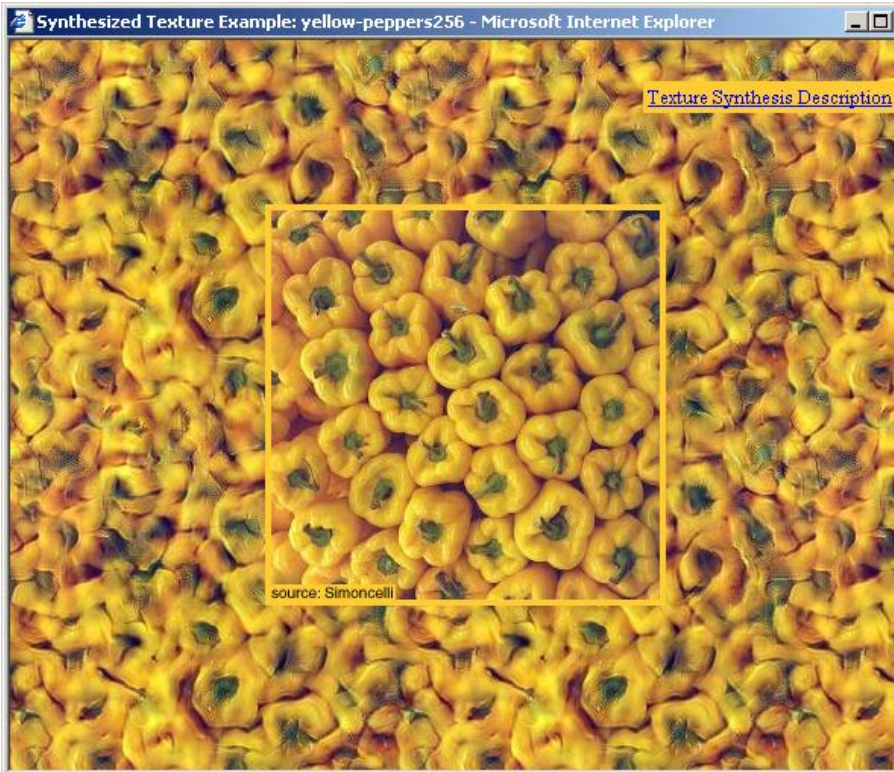

Portilla & Simoncelli

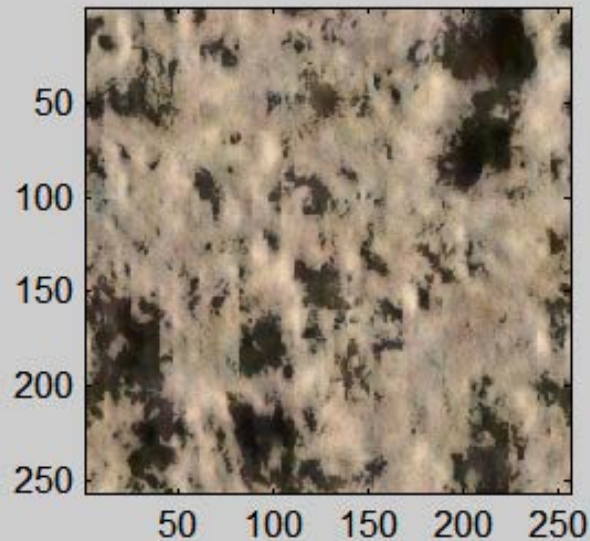
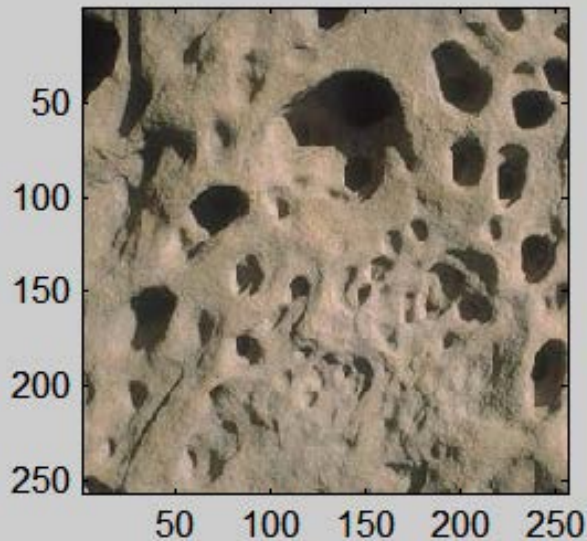


Heeger & Bergen

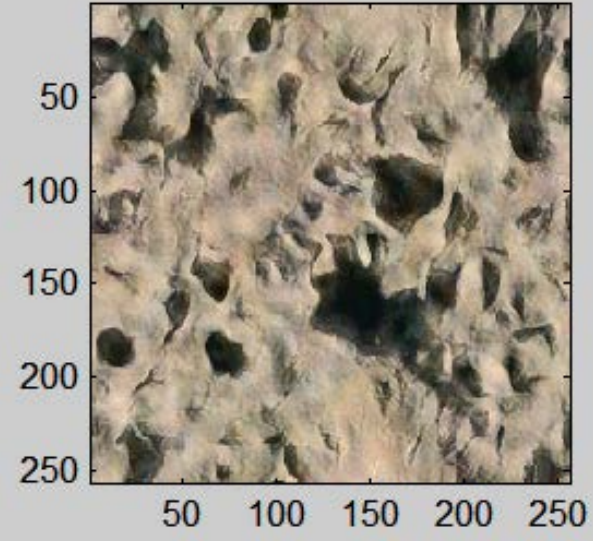

Portilla & Simoncelli

How to identify the set of equivalent textures?



Now they look good, but maybe they look too good...


Portilla & Simoncelli

A summary-statistic representation in peripheral vision explains visual crowding


Benjamin Balas ¹,
Lisa Nakano ² and
Ruth Rosenholtz ³



Journal of Vision
November 19, 2009 vol. 9 no. 12

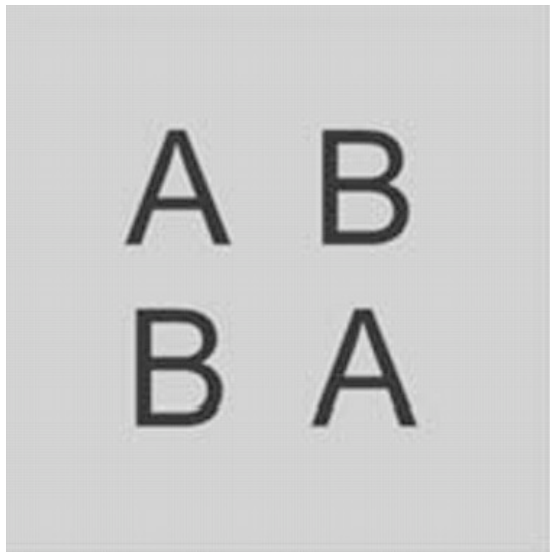


+

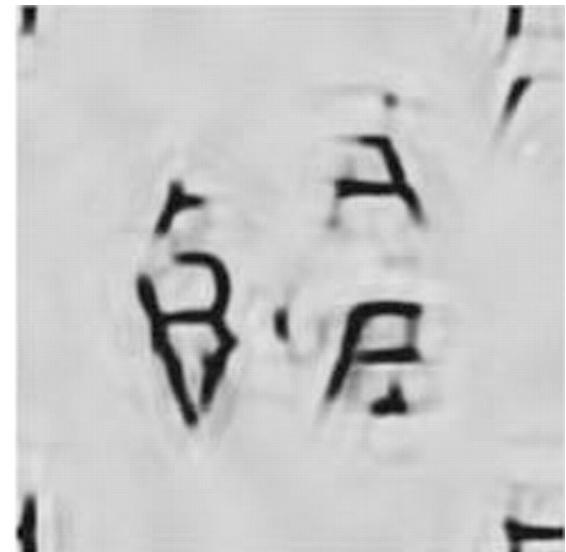

Zhu, Wu, & Mumford, 1998


- Principled approach. Based on an assumption of heavy-tailed distributions for an over-complete set of filters.
- Synthesis quality not great, but ok.

Zhu, Wu, & Mumford

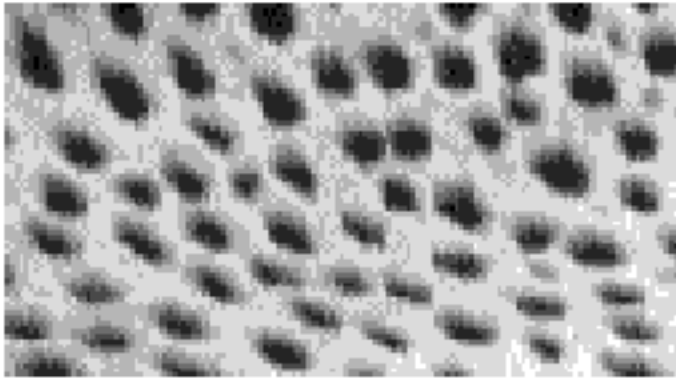

a

- Cheetah

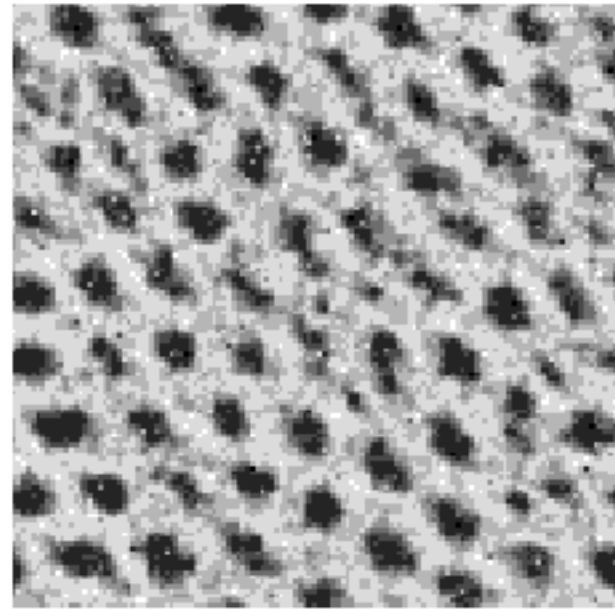

b

Synthetic

De Bonet (and Viola)

SIGGRAPH 1997

Multiresolution Sampling Procedure for Analysis and Synthesis of Texture Images

Jeremy S. De Bonet -
Learning & Vision Group
Artificial Intelligence Laboratory
Massachusetts Institute of Technology

EMAIL: jsd@ai.mit.edu
HOMEPAGE: <http://www.ai.mit.edu/~jsd>

DeBonet

Learn: use filter conditional statistics across scale.

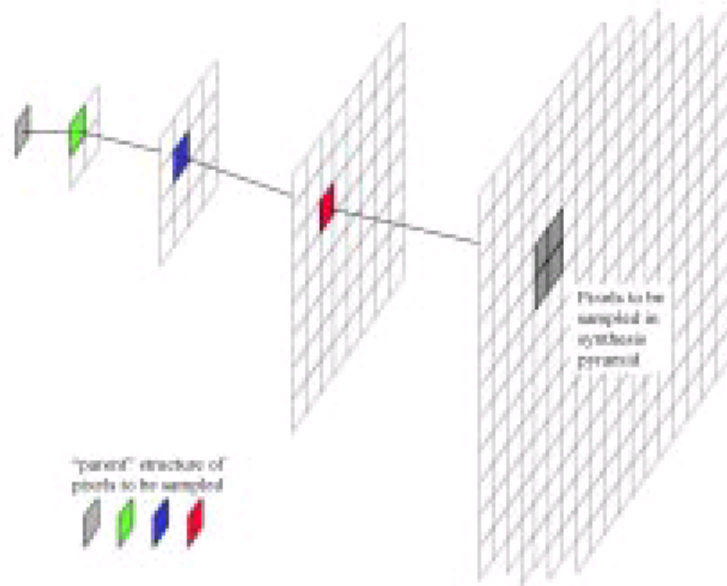


Figure 8: The distribution from which pixels in the synthesis pyramid are sampled is conditioned on the “parent” structure of those pixels. Each element of the parent structure contains a vector of the feature measurements at that location and scale.












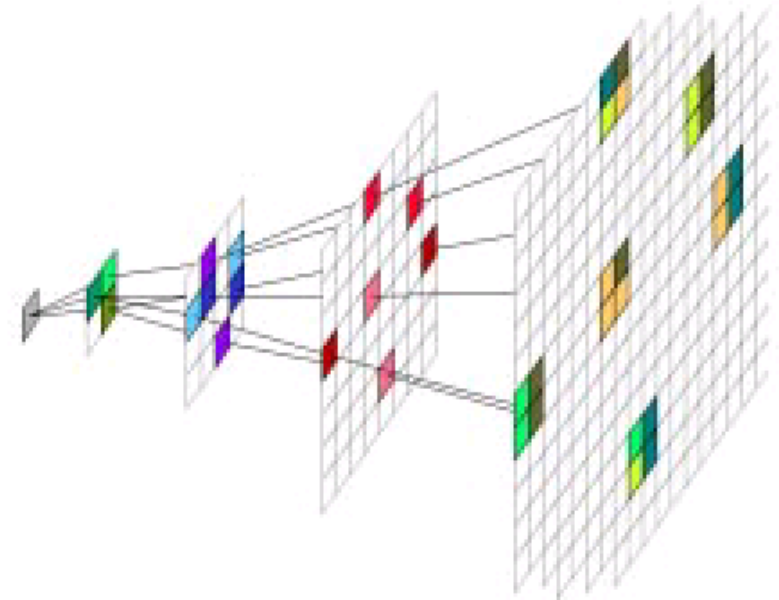


Figure 9: An input texture is decomposed to form an analysis pyramid, from which a new synthesis pyramid is sampled, conditioned on local features within the pyramids. A filter bank of local texture measures, based on psychophysical models, are used as features.

DeBonet

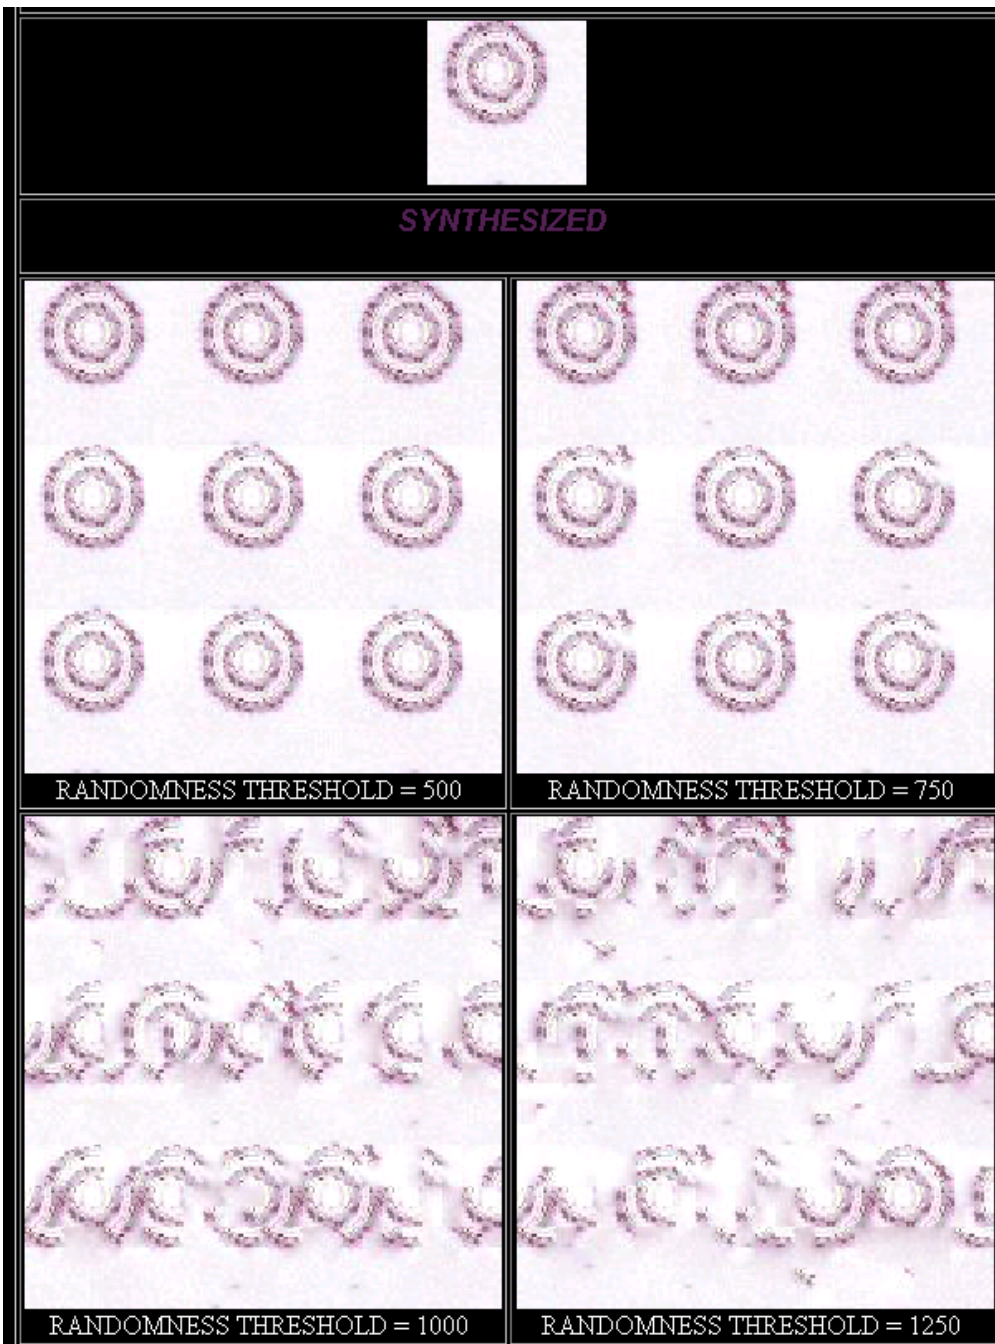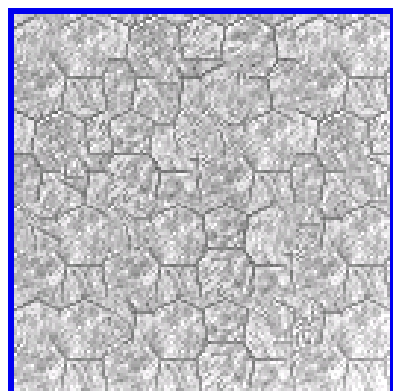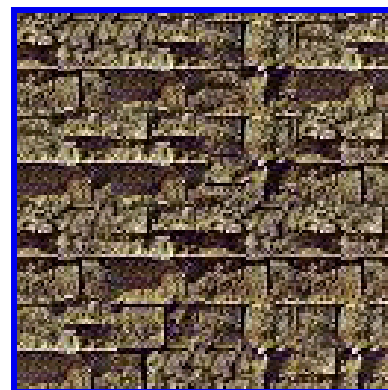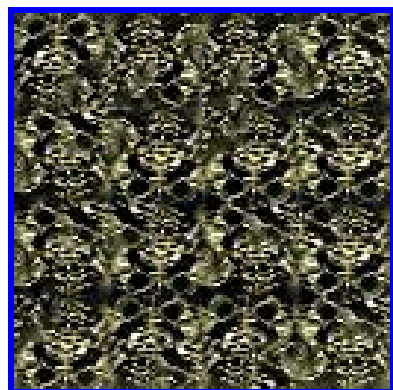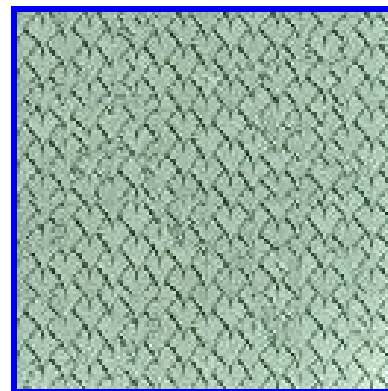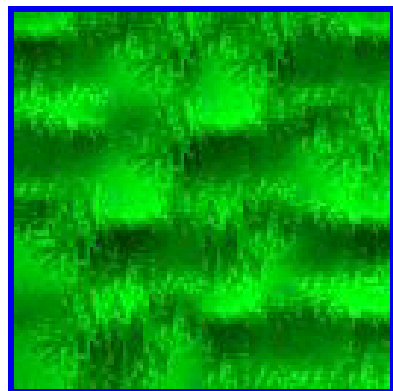

DeBonet



Two big families of models


1- Parametric models of filter outputs

2- Example-based non-parametric models

Texture Synthesis by Non-parametric Sampling

Alexei A. Efros and Thomas K. Leung
Computer Science Division
University of California, Berkeley
Berkeley, CA 94720-1776, U.S.A.
{efros,leungt}@cs.berkeley.edu


Efros & Leung Algorithm

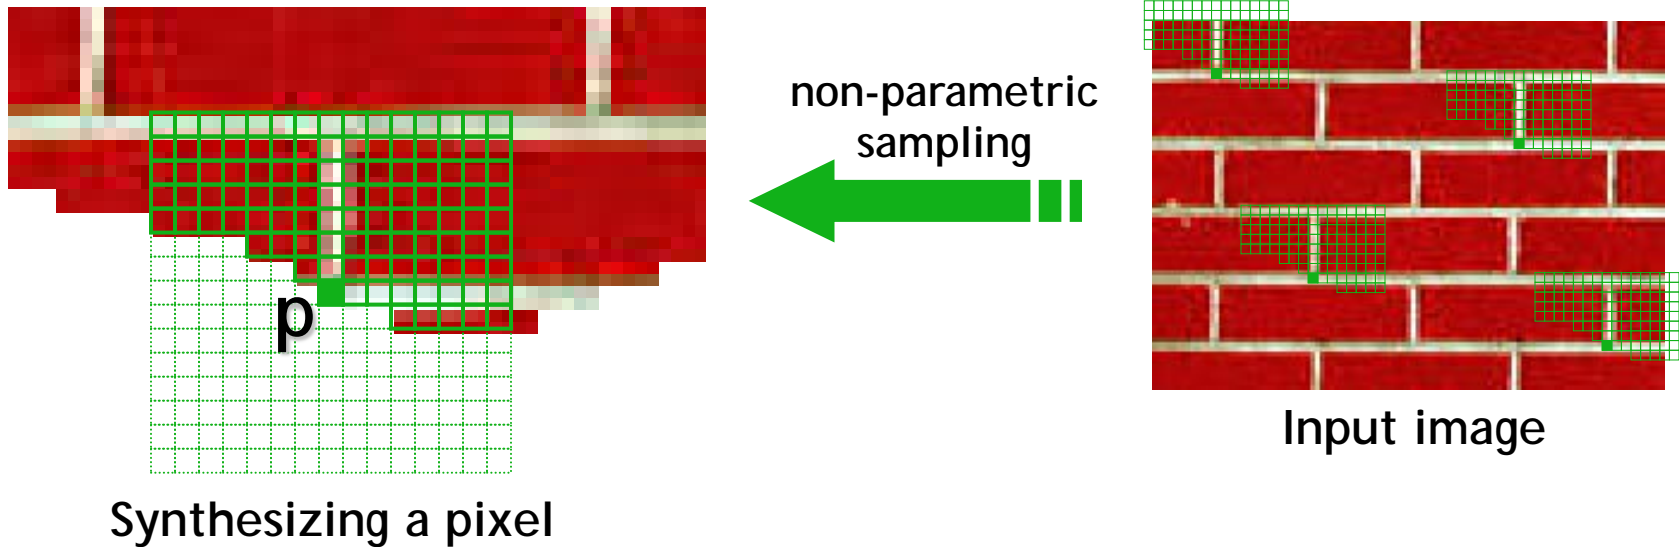









Assuming Markov property, compute $P(\mathbf{p}|\mathbf{N}(\mathbf{p}))$

- Building explicit probability tables infeasible
- Instead, we *search the input image* for all similar neighborhoods — that's our pdf for \mathbf{p}
- To sample from this pdf, just pick one match at random

Neighborhood Window

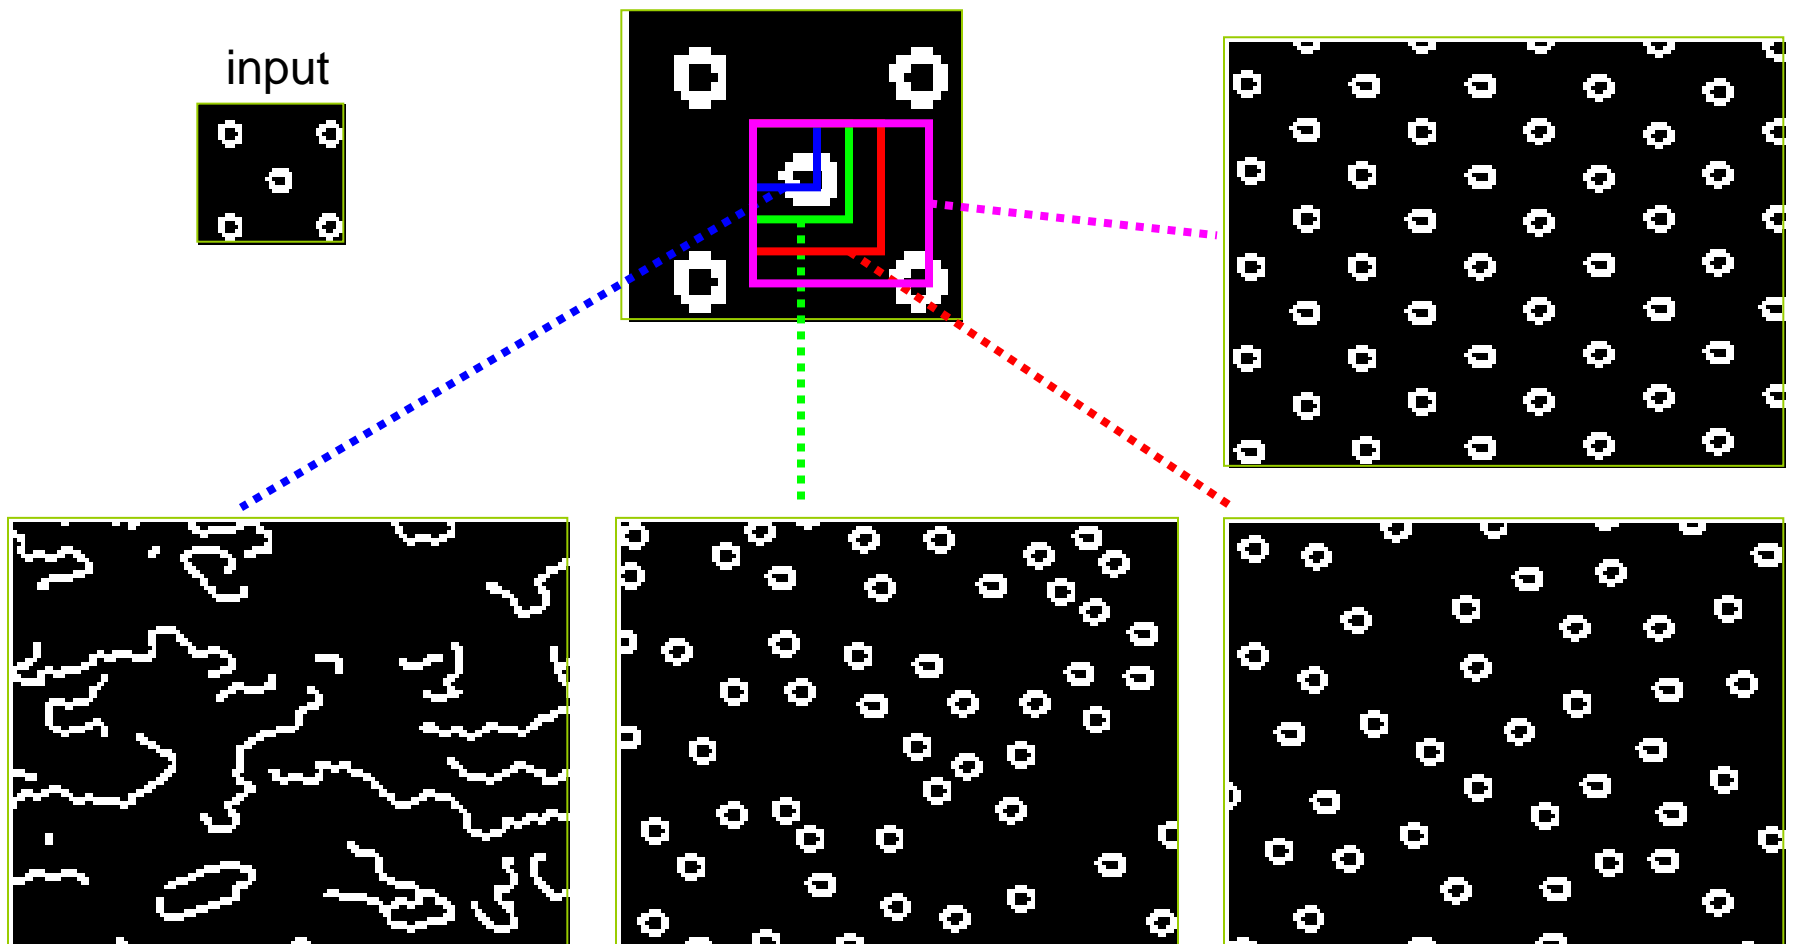

Varying Window Size

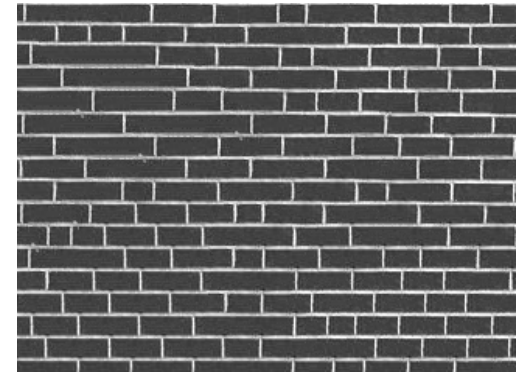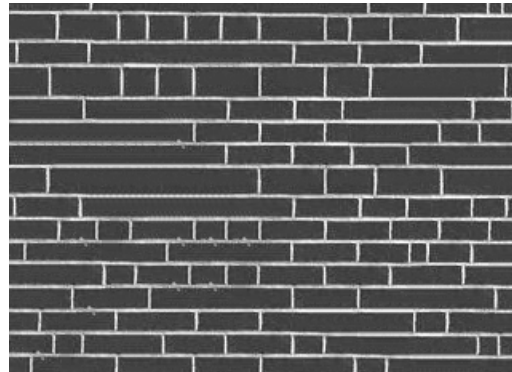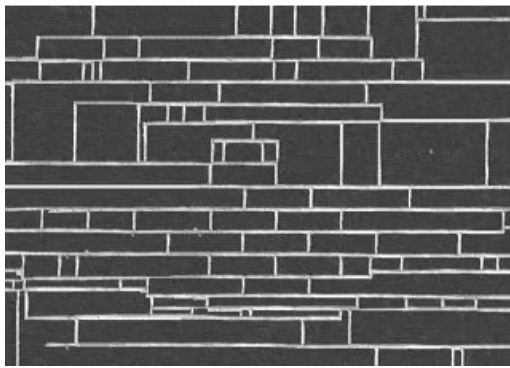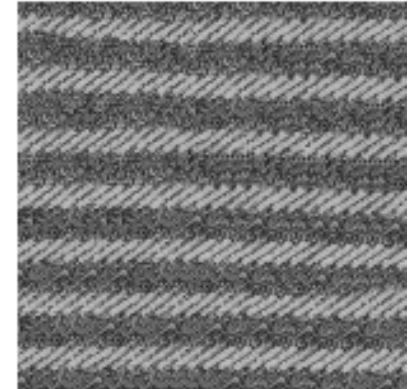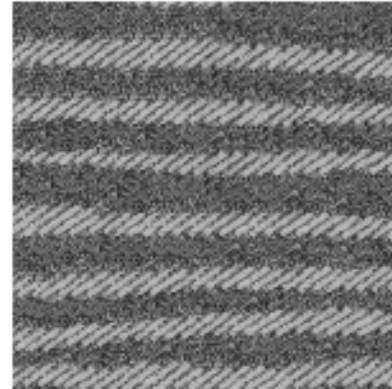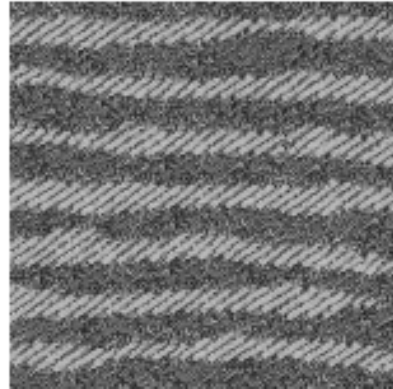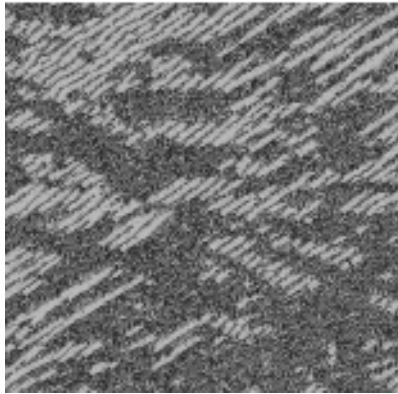



Increasing window size





Synthesis Results

french canvas

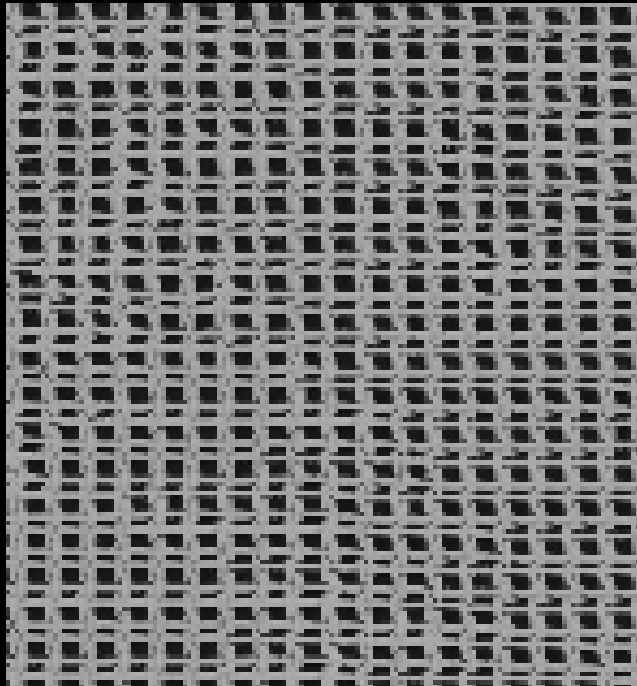

rafia weave

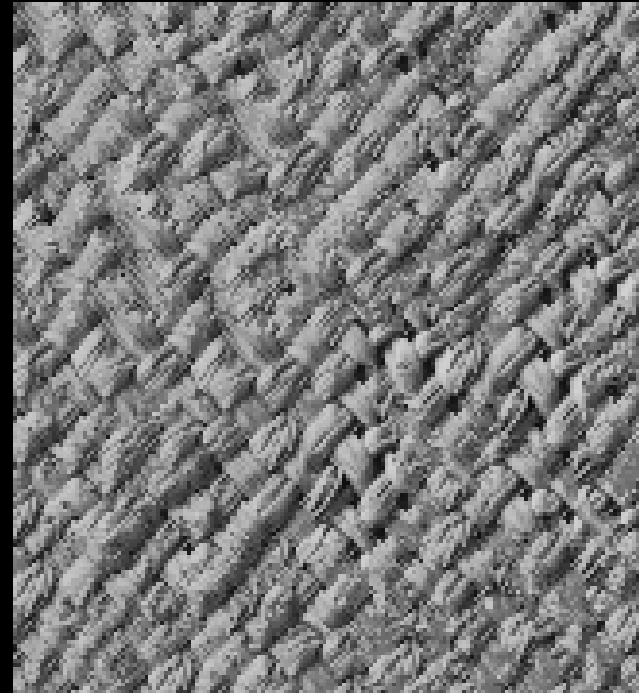



More Results

white bread




brick wall

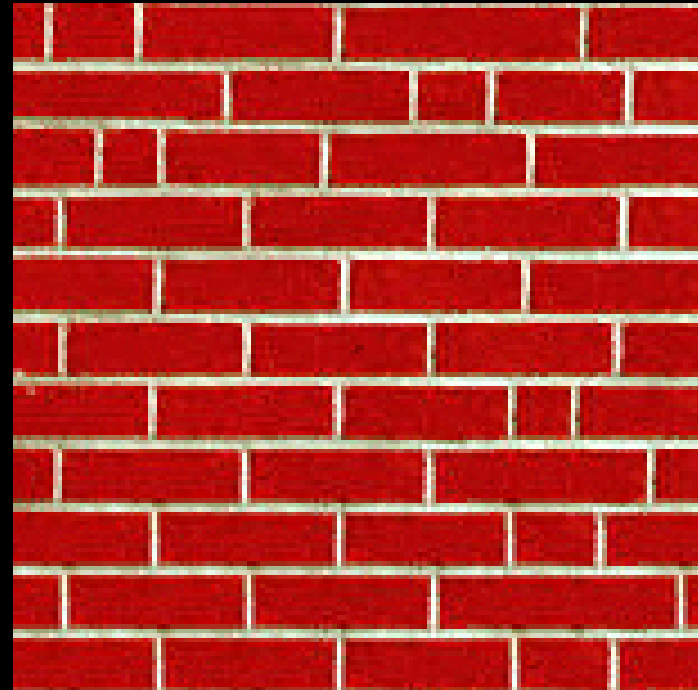


Homage to Shannon

...ing in the unsensational
... Dick Gephardt was fail
...rful riff on the looming
...nly asked, "What's your
...tions?" A heartfelt sigh
...story about the emergen
...es against Clinton. "Boy
...g people about continuin
...ardt began, patiently obs
...s, that the legal system h
...g with this latest tanger

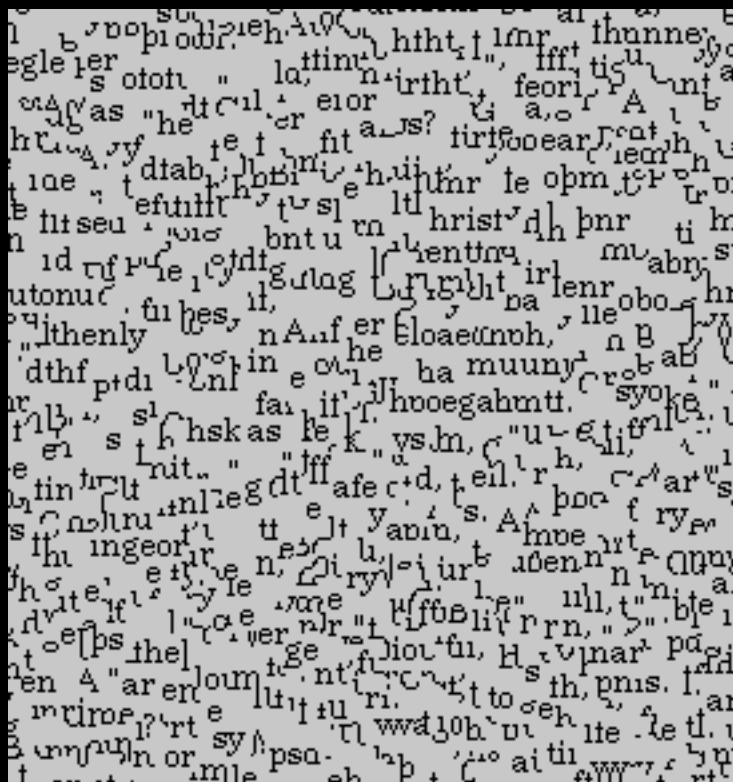

...thaim, them. "Whnephartfe lartifelintomimen
...fel ck Clirtioout omaim thartfelins.f out s anento
...the ry onst wartfe lck Gephtoomimeationl sigab
...Cliocoufit Clinut Clil riff on, hat's yo'dn, parut tly
...ons yontonsteht waked, paim t sahe loo riff on
...nskoneploourtfeas leil A nst Clit, "Wheontongal s
...k Cirtioouirtfepe ong pme abegal fartfenstemem
...tiensteneltorydt telemephminsverdt was agemer
...ff ons artientont Cling peme as artfe atih, "Boui s
...nal s fartfelt sig pedrltdt ske aboututie aboutioo
...tfeonewwas you abowthardt thatins fain, ped, '
...ains, them, pabout wasy arfnt coutly d, ln A h
...ble emthringbooreme agas fa bontinsyst Clinut
...ory about continst Clipeopinst Cloke agatiff out C
...stome zinemen tly ardt beorabol n, thenly as t C
...cons faimeme Diontont wat coutlyohgans as fan
...ien, phrtfaul, "Wbaut cout congagal comininga
...mifmst Clily abon al coountha.emungairt tfoun
...The loocrysta loontieph, intly on, theoplegatick
...aul fatieozntly atie Diontiomt wal s f tbegae ener
...othahgat's enephhmas fan, "intchthory abons w

Hole Filling

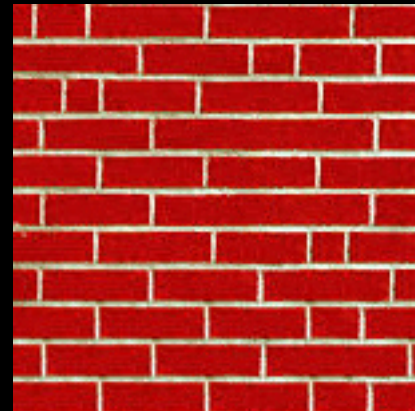

Extrapolation



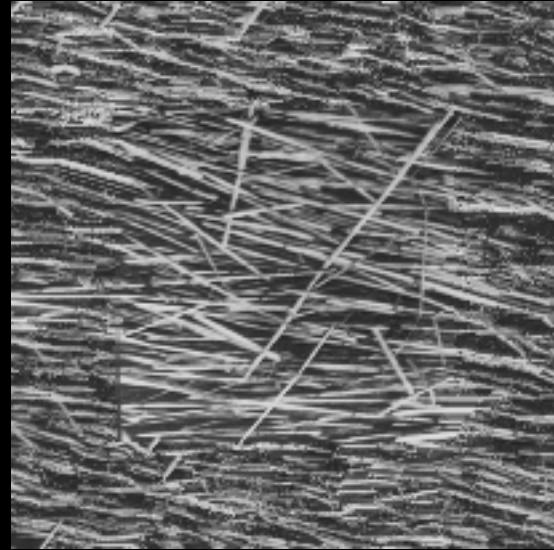



Image Quilting [Efros & Freeman]

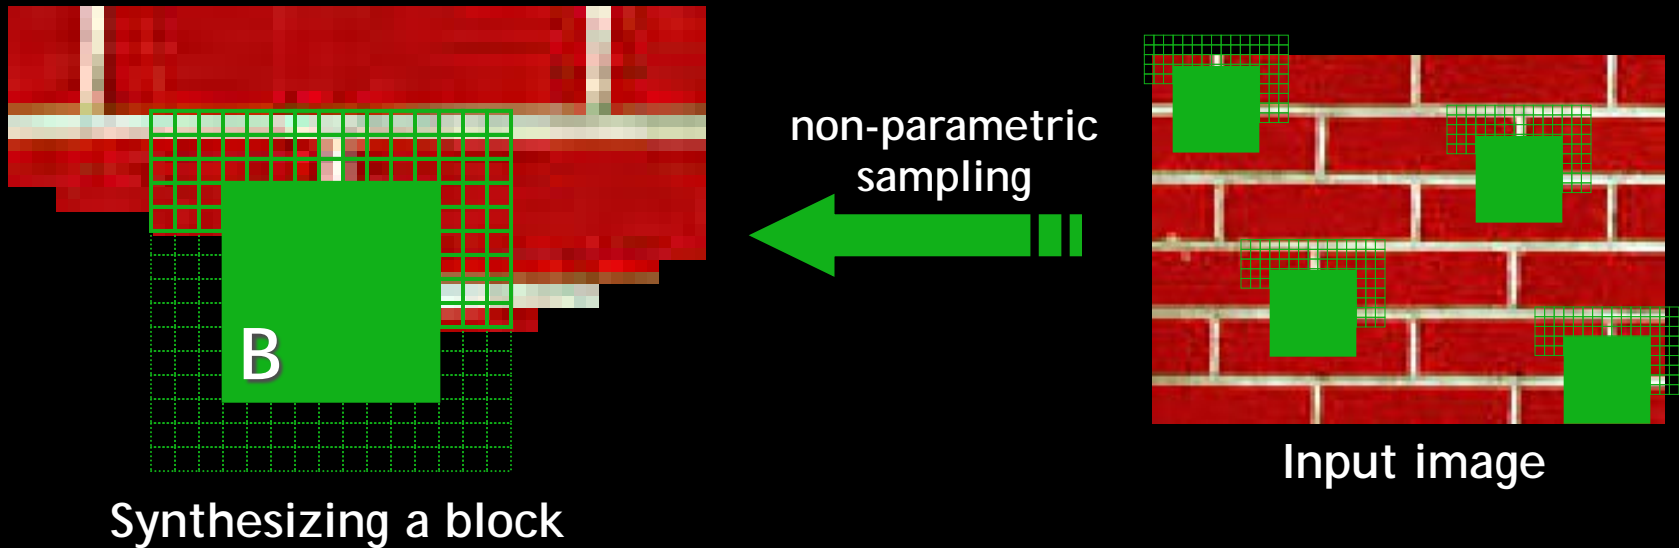


- Observation: neighbor pixels are highly correlated

Idea: unit of synthesis = block


- Exactly the same but now we want $P(B|N(B))$
- Much faster: synthesize all pixels in a block at once
- Not the same as multi-scale!

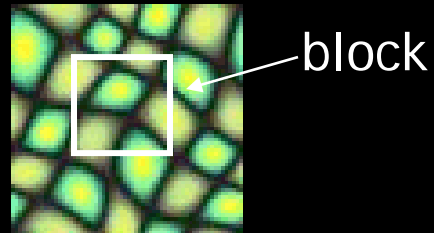


Input texture

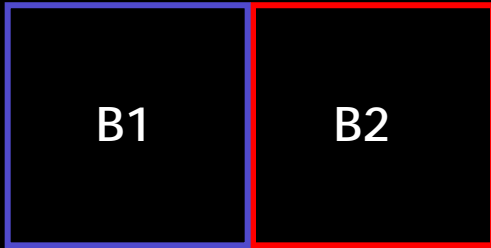




Random placement of blocks

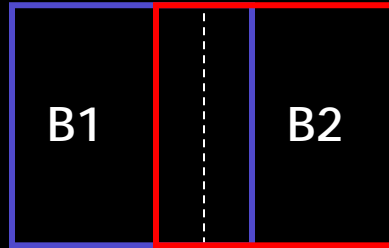

Neighboring blocks constrained by overlap

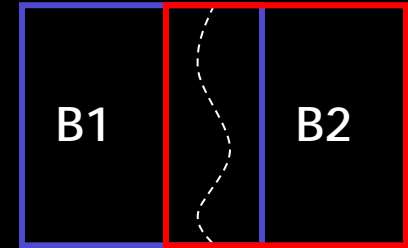


Minimal error boundary cut

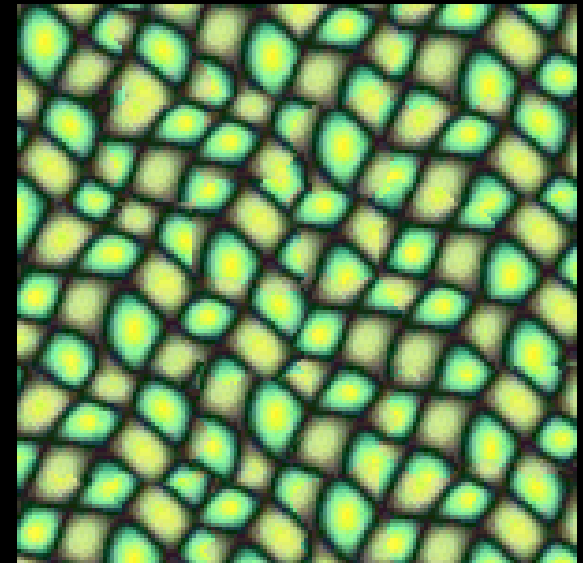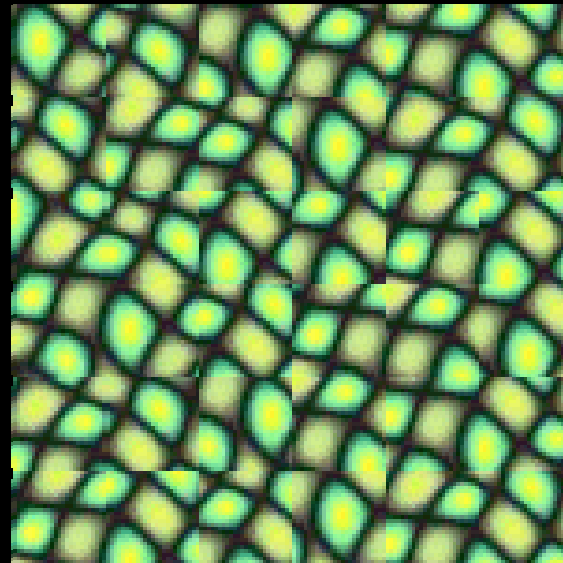
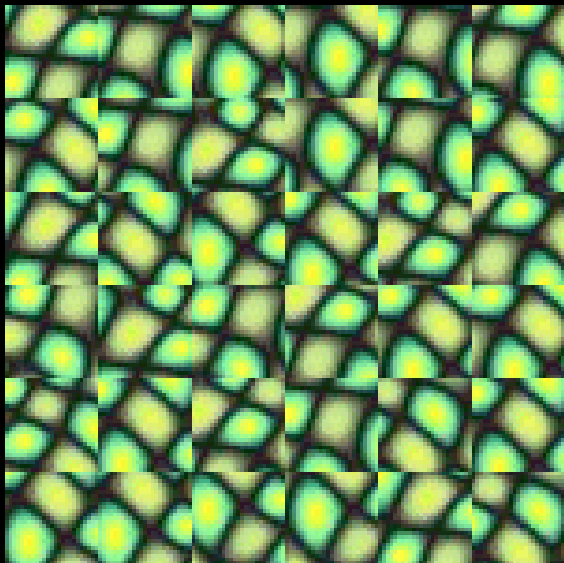



Minimal error boundary

overlapping blocks

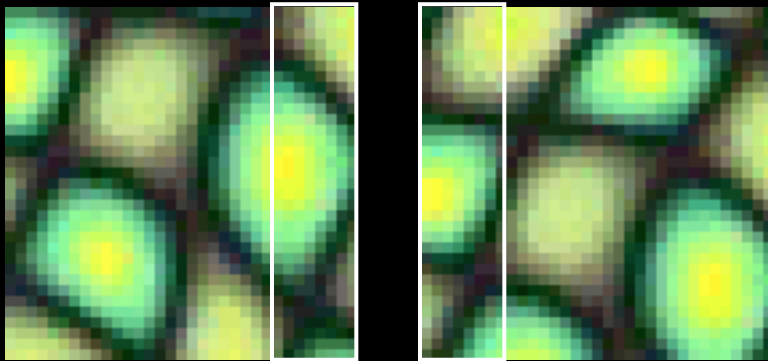


vertical boundary

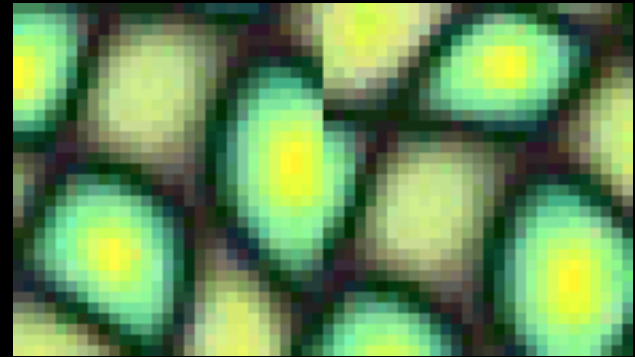

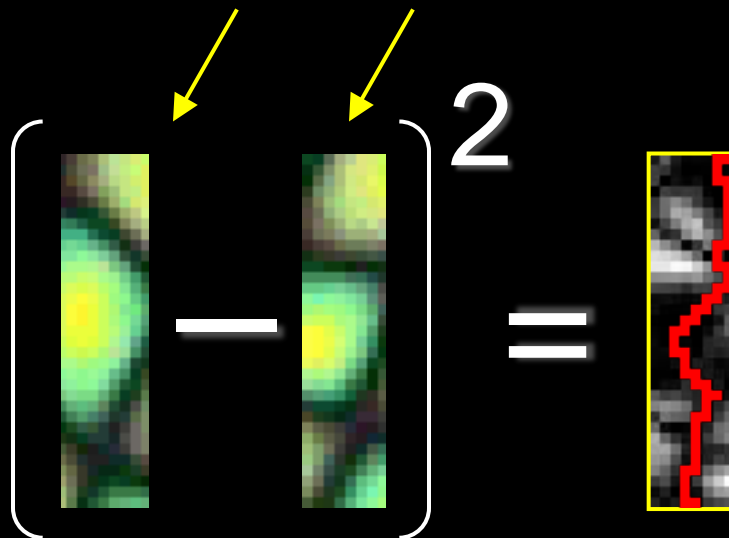
$$\left[\begin{array}{c} \text{Block 1} \\ - \\ \text{Block 2} \end{array} \right]^2 = \text{Boundary Map}$$
The diagram shows two overlapping blocks of a cell image. A white horizontal line is drawn across the overlapping region. Below this, the two blocks are shown again, with a minus sign between them, and the entire expression is enclosed in large square brackets. To the right of the brackets is a large number '2'. Below this is an equals sign, followed by a vertical strip of the image showing a red boundary line.

overlap error

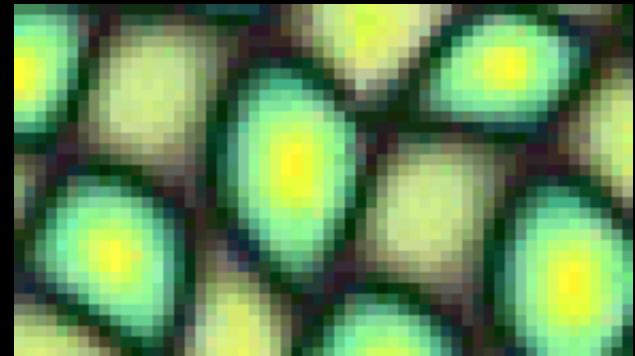

min. error boundary

Texture Transfer

- Take the texture from one object and “paint” it onto another object
 - This requires separating texture and shape
 - That’s HARD, but we can cheat
 - Assume we can capture shape by boundary and rough shading
- Then, just add another constraint when sampling: similarity to underlying image at that spot





parmesan

+



=





rice

+



=



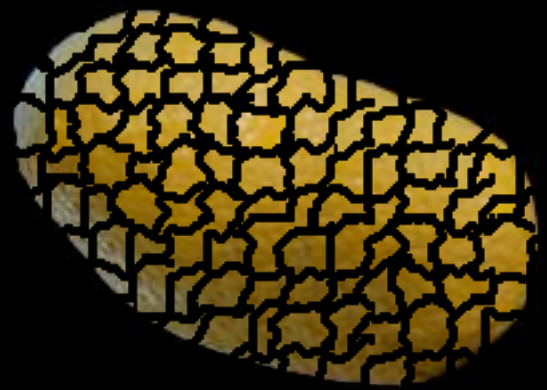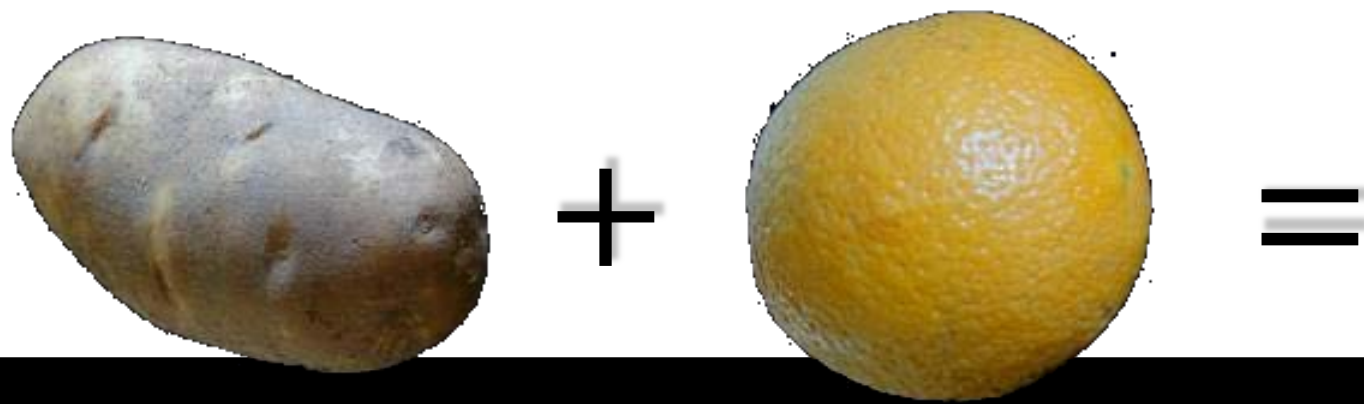




+



=



Source
texture

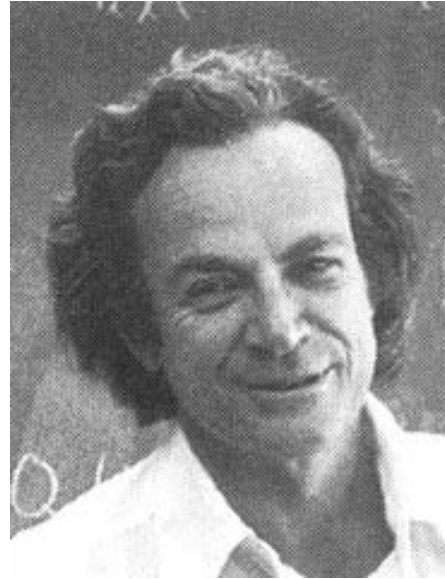


Target
image

Source
correspondence
image



Target
correspondence
image

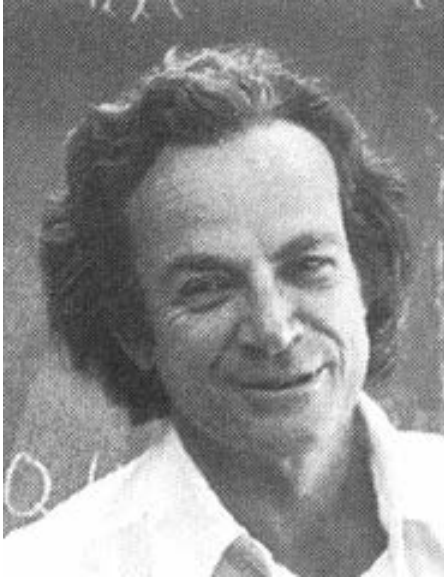

+





=






Project ideas


Non stationary texture synthesis

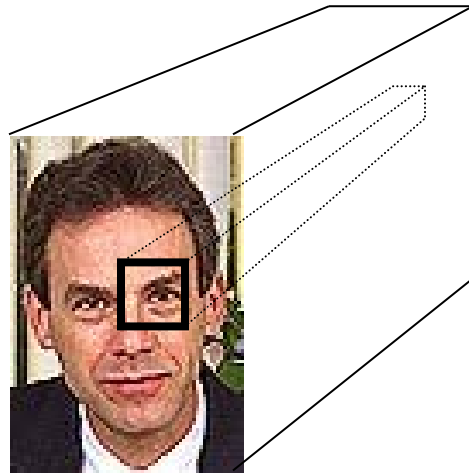

Project ideas: 3D textures

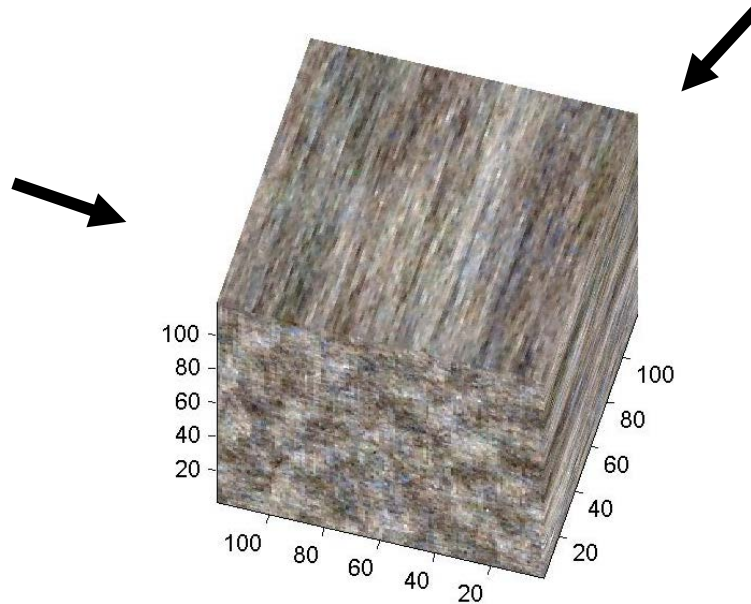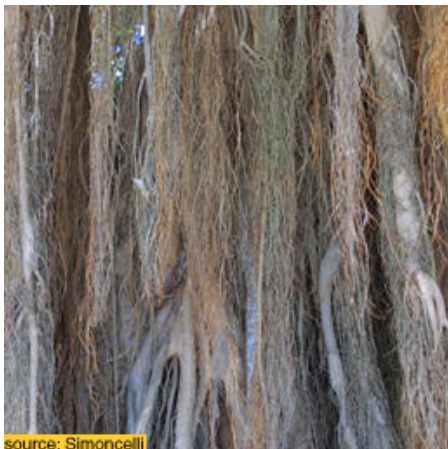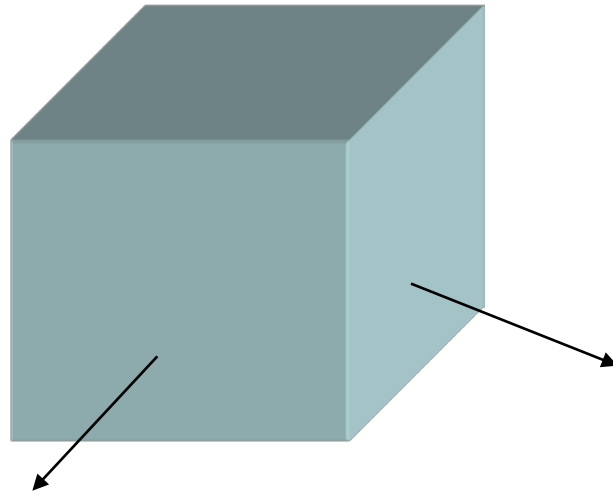

Project ideas: 3D textures

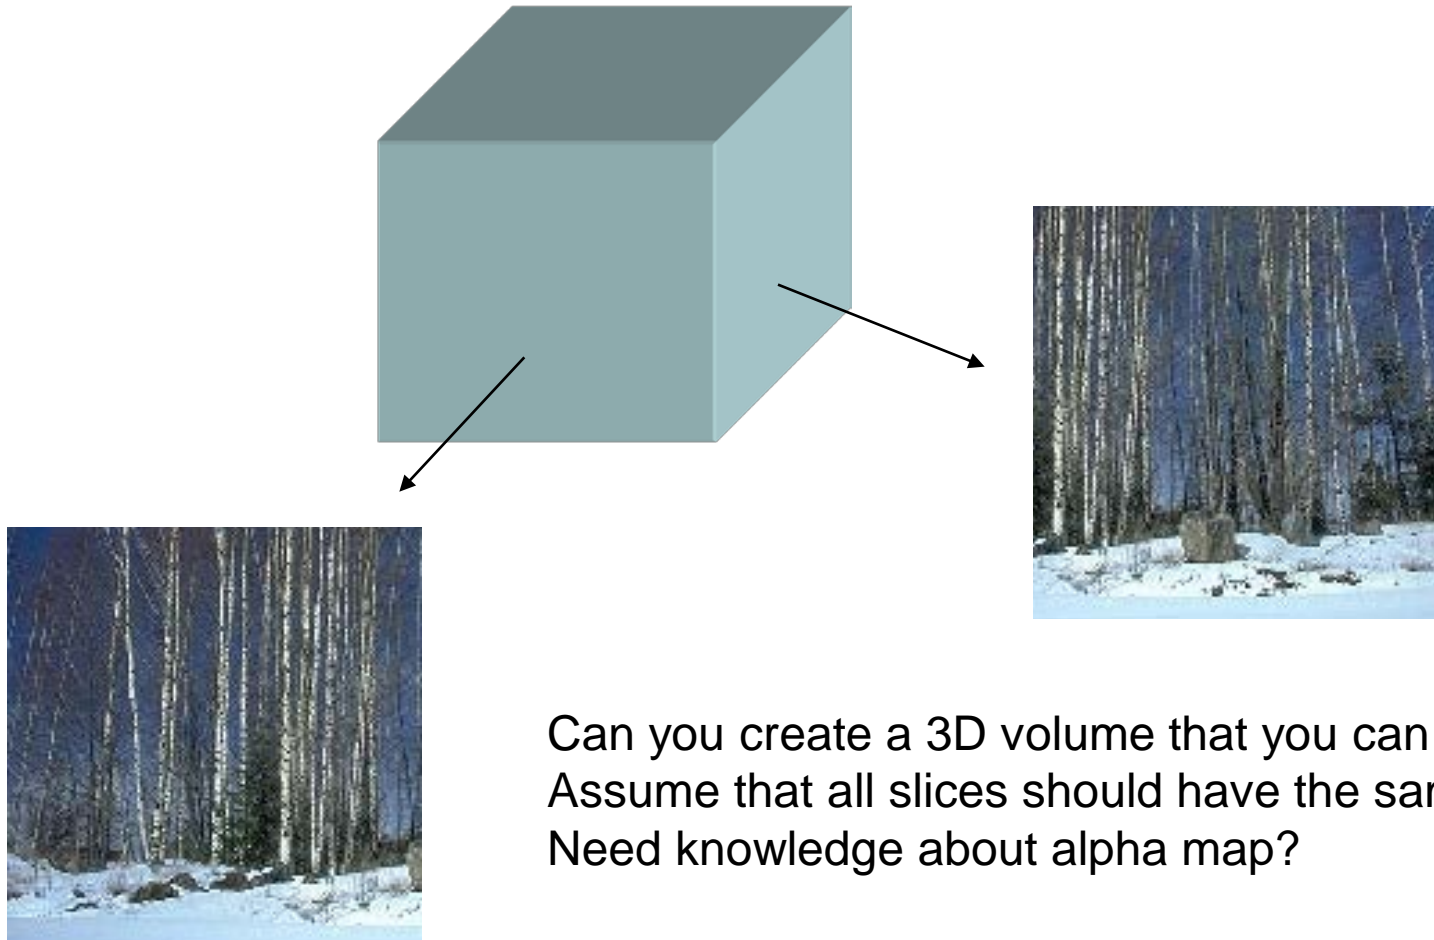

Can you create a 3D volume that you can navigate?
Assume that all slices should have the same statistics.
Need knowledge about alpha map?

This is not a solid texture. This is a 3D scene texture.